

**Doc 9377**  
**AN/915**



# **Manual on Coordination between Air Traffic Services, Aeronautical Information Services and Aeronautical Meteorological Services**

---

Approved by the Secretary General  
and published under his authority

Sixth Edition — 2014

International Civil Aviation Organization



Doc 9377  
AN/915



# Manual on Coordination between Air Traffic Services, Aeronautical Information Services and Aeronautical Meteorological Services

---

**Approved by the Secretary General  
and published under his authority**

**Sixth Edition — 2014**

**International Civil Aviation Organization**

Published in separate English, French, Russian and Spanish editions by the  
INTERNATIONAL CIVIL AVIATION ORGANIZATION  
999 University Street, Montréal, Quebec, Canada H3C 5H7

For ordering information and for a complete listing of sales agents  
and booksellers, please go to the ICAO website at [www.icao.int](http://www.icao.int)

*Fourth edition 2008*  
*Fifth edition 2010*  
*Sixth edition 2014*

**Doc 9377, *Manual on Coordination between  
Air Traffic Services, Aeronautical Information Services  
and Aeronautical Meteorological Services***  
Order Number: 9377  
ISBN 978-92-9249-698-2

© ICAO 2014

All rights reserved. No part of this publication may be reproduced, stored in a  
retrieval system or transmitted in any form or by any means, without prior  
permission in writing from the International Civil Aviation Organization.

### AMENDMENTS

Amendments are announced in the supplements to the *Publications Catalogue*; the Catalogue and its supplements are available on the ICAO website at [www.icao.int](http://www.icao.int). The space below is provided to keep a record of such amendments.

#### RECORD OF AMENDMENTS AND CORRIGENDA

AMENDMENTS		
No.	Date	Entered by
1	23/6/17	ICAO
2	24/8/18	ICAO

CORRIGENDA		
No.	Date	Entered by



# TABLE OF CONTENTS

	<i>Page</i>
<b>Glossary</b> .....	<b>(vii)</b>
<b>Chapter 1. Introduction</b> .....	<b>1-1</b>
<b>Chapter 2. Air traffic and meteorological services organizations</b> .....	<b>2-1</b>
2.1 Units providing air traffic and search and rescue services .....	2-1
2.2 Centres, offices and stations providing meteorological information to aeronautical users, including ATS units and search and rescue services centres .....	2-2
2.3 Links between ATS units, RCCs/RSCs and aerodrome meteorological offices, meteorological watch offices (MWOs) and aeronautical meteorological stations .....	2-5
<b>Chapter 3. Meteorological information for ATS and search and rescue services units</b> .....	<b>3-1</b>
3.1 Introduction .....	3-1
3.2 Displays/instruments in ATS units .....	3-1
3.3 Information for TWRs and ATS units providing approach control service .....	3-2
3.4 Information for ACCs or FICs .....	3-3
3.5 Information for ATS units providing service for low-level flights .....	3-6
3.6 Information for air-ground control radio stations, VOLMET broadcasts and uplink of OPMET data to aircraft in flight .....	3-8
3.7 Information for RCCs and RSCs .....	3-9
3.8 Format of information .....	3-9
3.9 Emergencies .....	3-10
3.10 Communication between ATS units and meteorological centres, offices and stations .....	3-10
<b>Chapter 4. Meteorological information received by ATS units from sources other         than the associated meteorological offices and stations</b> .....	<b>4-1</b>
4.1 Observing and reporting of meteorological information by ATS units .....	4-1
4.2 Reports of aircraft observations received in ATS units .....	4-1
<b>Chapter 5. Coordination between ATS units and meteorological offices and stations</b> .....	<b>5-1</b>
5.1 General .....	5-1
5.2 Coordination between TWRs and APPs and their associated meteorological offices and stations .....	5-4
5.3 Coordination between ACCs/FICs and the associated MWOs .....	5-6
<b>Chapter 6. Coordination between aeronautical information services and         aeronautical meteorological services</b> .....	<b>6-1</b>

	<i>Page</i>
<b>Chapter 7. Meteorological support to the ATM system.....</b>	<b>7-1</b>
7.1 Introduction.....	7-1
7.2 Overview of the MET information required under the ATM operational concept.....	7-1
7.3 Meteorological support to international air navigation in accordance with the Global Plan .....	7-
<b>Appendix 1. Standard radiotelephony phraseologies to be used in VOLMET broadcasts .....</b>	<b>A1-1</b>
<b>Appendix 2. Sample letter of agreement between the ATS and meteorological authorities .....</b>	<b>A2-1</b>
<b>Appendix 3. Information on the meteorological authority and meteorological services to be included in the aeronautical information publication (AIP) .....</b>	<b>A3-1</b>
<b>Appendix 4. Procedures used in France to provide meteorological service to ATS units.....</b>	<b>A4-1</b>
<b>Appendix 5. Procedures used in the United States to provide meteorological service to ATS units .....</b>	<b>A5-1</b>

---



# GLOSSARY

## A

ACARS	Aircraft communication addressing and reporting system
ACC	Area control centre <i>or</i> area control
ADS-C	Automatic dependent surveillance — contract
AFTN	Aeronautical fixed telecommunication network
AIC	Aeronautical information circular
AIP	Aeronautical information publication
AIRAC	Aeronautical information regulation and control
AIREP	Air-report ( <i>routine or special</i> )
AIRMET	Information concerning en-route weather phenomena which may affect the safety of low-level aircraft operations
AIS	Aeronautical information services
AMBEX*	Africa-Indian Ocean Region MET Bulletin Exchange ( <i>Scheme</i> )
AMD	Amend <i>or</i> amended ( <i>used to indicate amended meteorological message; message type designator</i> )
AMDAR*	Aircraft meteorological data relay ( <i>system</i> ) (WMO)
APP	Approach control unit
ASHTAM	Special series NOTAM notifying, by means of a specific format, change in activity of a volcano, a volcanic eruption and/or volcanic ash cloud that is of significance to aircraft operations
ATFM	Air traffic flow management
ATFMC*	Air traffic flow management centre
ATIS	Automatic terminal information service
ATM	Air traffic management
ATS	Air traffic services

## C

CB	Cumulonimbus
CNS	Communications, navigation and surveillance
CPDLC	Controller-pilot data link communications
CTA	Control area

## D

D-ATIS	Data link automatic terminal information service
D-FIS*	Data link flight information service
D-VOLMET	Data link VOLMET

---

\* Abbreviations not included in the *Procedures for Air Navigation Services — ICAO Abbreviations and Codes* (PANS-ABC, Doc 8400).

**E**

ECMWF\* European Centre for Medium Range Forecasts

**F**

FIC Flight information centre

FIR Flight information region

FIS Flight information service

FL Flight level

**G**

GAMET Area forecast for low-level flights

GRIB Processed meteorological data in the form of grid point values expressed in binary form

GTS\* Global telecommunication system (WMO)

**H**

HF High frequency (3 000 to 30 000 kHz)

**I**

IAEA\* International Atomic Energy Agency

IAIP\* Integrated aeronautical information package

IAVV\* International airways volcano watch

**M**

MET Meteorological or meteorology

METAR Aerodrome routine meteorological report (*in meteorological code*)MET REPORT Local routine meteorological report (*in abbreviated plain language*)

MWO Meteorological watch office

**N**

NIL None or I have nothing to send to you

NM Nautical miles

NOTAM A notice distributed by means of telecommunication containing information concerning the establishment, condition or change in any aeronautical facility, service, procedure or hazard, the timely knowledge of which is essential to personnel concerned with flight operations

\* Abbreviations not included in the *Procedures for Air Navigation Services — ICAO Abbreviations and Codes* (PANS-ABC, Doc 8400).

**O**

OPMET Operational meteorological (*information*)

**P**

PANS-ABC *Procedures for Air Navigation Services — ICAO Abbreviations and Codes* (PANS-ABC, Doc 8400)

PANS-ATM *Procedures for Air Navigation Services — Air Traffic Management* (PANS-ATM, Doc 4444)

PIB Pre-flight information bulletin

**Q**

QFE Atmospheric pressure at aerodrome elevation (*or at runway threshold*)

QNH Altimeter sub-scale setting to obtain elevation when on the ground

**R**

RCC Rescue coordination centre

ROBEX Regional OPMET Bulletin Exchange (*within the Middle East, Asia and Pacific Regions*)

RODEX\* Regional OPMET Data Exchange (*within EUR Region*)

RSC Rescue sub-centre

RVR Runway visual range

RSMC\* Regional specialized meteorological centre (WMO)

**S**

SADIS Secure Aviation Data Information Service

SARPs Standards and Recommended Practices

SIGMET Information concerning en-route weather and other phenomena in the atmosphere that may affect the safety of aircraft operations

SIGWX Significant weather

SNOWTAM Special series NOTAM notifying the presence or removal of hazardous conditions due to snow, ice, slush or standing water associated with snow, slush and ice on the movement area, by means of a specific format

SPECI Aerodrome special meteorological report (*in meteorological code*)

SPECIAL Local special meteorological report (*in abbreviated plain language*)

SSR Secondary surveillance radar

SUPPS Regional supplementary procedures

\* Abbreviations not included in the *Procedures for Air Navigation Services — ICAO Abbreviations and Codes* (PANS-ABC, Doc 8400).

(x)

**T**

TAF	Aerodrome forecast ( <i>in meteorological code</i> )
TCAC	Tropical cyclone advisory centre
TCU	Towering cumulus
TDWR*	Terminal Doppler weather radar
TREND	Trend forecast
TWR	Aerodrome control tower <i>or</i> aerodrome control

**U**

UIR	Upper flight information region
-----	---------------------------------

**V**

VAAC	Volcanic ash advisory centre
VDU*	Visual display unit
VFR	Visual flight rules
VHF	Very high frequency (30 to 300 MHz)
VOLMET	Meteorological information for aircraft in flight

**W**

WAFC	World area forecast centre
WAFS*	World area forecast system
WIFS*	WAFS Internet File Service
WMO*	World Meteorological Organization

---

\* Abbreviations not included in the *Procedures for Air Navigation Services — ICAO Abbreviations and Codes* (PANS-ABC, Doc 8400).

# Chapter 1

## INTRODUCTION

*Note.— There is a close operational affinity in many States between air traffic services (ATS) and search and rescue services. Both services are often provided by the same department responsible for civil aviation. Substantial parts of this manual are therefore applicable to the coordination between search and rescue services and meteorological services, even in cases where specific reference to search and rescue services is not made.*

1.1 The objectives of ATS are to:

- a) prevent collisions between aircraft in the air or on the manoeuvring area of an aerodrome;
- b) prevent collisions between aircraft on the manoeuvring area and obstructions on that area;
- c) expedite and maintain an orderly flow of air traffic;
- d) provide advice and information useful for the safe and efficient conduct of flights; and
- e) notify appropriate organizations regarding aircraft in need of search and rescue aid and assist such organizations as required.

1.2 It is clear that in order to achieve these objectives effectively, ATS units require a great deal of meteorological information and service. This has been recognized in the specifications for the meteorological service to be provided for international air navigation, which describe how operators, flight crew members, ATS units, search and rescue services centres, airport management and others concerned with the conduct of international air navigation are to be supplied with the meteorological information necessary for the performance of their respective functions.

1.3 The meteorological information required by ATS units can be divided into two kinds:

- a) that needed to carry out air traffic control functions (e.g. surface wind data for establishing runways in use, weather radar data for guiding aircraft, and upper-air forecasts for tactical decision-making); and
- b) that needed to provide information to aircraft in flight (en route, landing or taking off).

1.4 The meteorological data required by ATS units to carry out these two functions have grown over the years in number and complexity. With the use of voice communications (HF and VHF) and the implementation of data link communications, ATS units have become an important intermediary for the transmission of meteorological data to aircraft. Even when information is broadcast to aircraft, ATS units are usually responsible for some of these broadcasts (e.g. routine broadcasts of meteorological information for aircraft in flight (VOLMET broadcasts), and automatic terminal information service (ATIS) broadcasts) and also for receiving meteorological information from aircraft through air-reports (AIREPs). The latter are very important since the occurrence of certain weather phenomena, such as turbulence, icing and low-level wind shear, can, to a large extent, only be diagnosed and confirmed in this manner.

1.5 The lowering of aerodrome operating minima and the implementation of all-weather operations have increased the need for accurate and timely information on local weather conditions at aerodromes for which modern, automated meteorological instrumentation and observation systems are used. The exclusion of weather echoes from

many ATS radar systems has made it necessary to provide information to controllers from weather radar and weather radar networks. Much of this information has been integrated with processed meteorological satellite data. In order for centralized ATS units to achieve efficient air traffic flow management (ATFM) and track selection, digital grid point upper wind and upper-air temperature forecasts from the world area forecast system (WAFS) have become necessary input for air traffic control computers.

1.6 To ensure that exchanges of meteorological information take place speedily and effectively, there is a need for efficient coordination between air traffic and meteorological services and their respective authorities. Requirements for such coordination are stated or implied in many parts of Annex 3 — *Meteorological Service for International Air Navigation*, Annex 11 — *Air Traffic Services*, Annex 12 — *Search and Rescue* and the *Procedures for Air Navigation Services — Air Traffic Management* (PANS-ATM, Doc 4444).

1.7 The Ninth Air Navigation Conference (1976) considered that there was a need for a manual on modern methods for the provision of meteorological information to ATS units and the use of that information by those units. It was intended that the manual should make available to States information and guidance based on practical experience concerning ways and means of improving the coordination between ATS and meteorological offices and stations serving the same aerodrome and between area control centres/flight information centres (ACCs/FICs) and their associated meteorological watch offices (MWOs). The manual was also to contain information on relevant modern methods employed by States, particularly in respect of the provision to ATS units of weather radar data and weather information required by flights operating below flight level 100.

1.8 The primary aim of this manual is to meet the general intent of the requirements expressed by the Ninth Air Navigation Conference. It also provides information regarding the coordination between search and rescue and meteorological services.

1.9 The manual does not define in detail each function of the offices, stations, units and centres concerned since that information is already provided in Annexes 3, 11, 12 and the PANS-ATM; it only gives a general idea of those functions in order to ensure mutual understanding and the provision of the necessary information to aeronautical users.

1.10 In order to discuss the coordination between air traffic and meteorological services, it is necessary to provide adequate background information concerning:

- a) the organization of air traffic and meteorological services;
- b) the meteorological information to be provided to ATS units and search and rescue services centres by meteorological offices and stations (i.e. by aerodrome meteorological offices, MWOs and aeronautical meteorological stations); and
- c) the meteorological information obtained by ATS units from sources other than the aerodrome meteorological offices, MWOs and aeronautical meteorological stations (e.g. air-reports from various phases of flight).

This background information is given in Chapters 2 to 4. It should be noted that the words “shall” and “should” are not used in this document with the same regulatory meaning as in the Annexes to the Convention, which should be consulted for the status of the provisions concerned.

1.11 This sixth edition of the manual updates the existing chapters and appendices to reflect the relevant amendments that have been made to the ICAO Annexes and includes material important to the coordination between air traffic and meteorological services. This edition preserves the manual’s compatibility with Amendment 75 to Annex 3 and includes material related to the *Global Air Traffic Management Operational Concept* (Doc 9854) and the *Global Air Navigation Plan* (Doc 9750), in response to ASIA/PAC Air Navigation Planning and Implementation Regional Group (APANPIRG) Conclusion 18/49.

1.12 All aspects of the progress that has been made in the provision of meteorological service to international air navigation and in the development of contemporary meteorological techniques and modern information and communications technologies to supply meteorological information to ATS units are duly reflected in this edition. Also, contributions from two States describing the methods, arrangements and technologies currently applied in those States to achieve coordination between ATS units and meteorological offices and stations are reproduced in Appendices 4 and 5.

1.13 A chapter concerning the coordination between aeronautical information services (AIS) units and meteorological authorities and their meteorological offices and stations has been included to reflect the increasing interaction between these parties. In this context, it may be recalled that, for example, the timely provision of information and warnings to aircraft regarding volcanic eruptions, pre-eruption volcanic activity, volcanic ash, and radioactive and hazardous chemical substances "clouds" cannot be achieved without close coordination between AIS units, meteorological offices and stations, and ATS units.

1.14 It is envisaged that the current ATS system will be fundamentally improved through extensive implementation of communications, navigation and surveillance (CNS) technologies to accommodate the expected increase in flight operations in all regions. In view of the implementation of air traffic management (ATM), the manual contains a chapter which outlines the sources of, and the plans and future requirements for, meteorological support to the ATM system.

---





## Chapter 2

# AIR TRAFFIC AND METEOROLOGICAL SERVICES ORGANIZATIONS

### 2.1 UNITS PROVIDING AIR TRAFFIC AND SEARCH AND RESCUE SERVICES

The following units provide air traffic and search and rescue services:

- a) **Aerodrome control tower (TWR).** A unit established to provide air traffic control service to aerodrome traffic.

Provides aerodrome control service which includes, in particular, the control of aircraft arriving at or departing from the aerodromes concerned. In most cases TWRs provide this service to aircraft on the manoeuvring area (runways and taxiways) of the aerodrome and in the vicinity of the aerodrome (i.e. during actual take-off and landing and upon entering or leaving the traffic circuit, taking into consideration the dimensions of the circuit).

- b) **Approach control unit (APP).** A unit established to provide air traffic control service to controlled flights arriving at or departing from one or more aerodromes.

Established at certain aerodromes when it is necessary or desirable to create a separate unit, it provides approach control service to controlled aircraft approaching or departing an aerodrome under instrument flight rules.

- c) **Area control centre (ACC).** A unit established to provide air traffic control service to controlled flights in control areas under its jurisdiction.

*Note.— The ATS units in a), b) and c) also provide flight information and alerting services.*

- d) **Flight information centre (FIC).** A unit established to provide flight information service and alerting service.

*Note 1.— As indicated by its title, the function of an FIC is to provide “information” useful for the safe and efficient conduct of flights; this is different from the function of units that carry out “control” service (e.g. ACCs), which provide a service aimed at the prevention of collisions as well as the maintenance of an orderly flow of air traffic.*

*Note 2.— Air traffic flow management (ATFM) is being implemented as a sub-element of the air traffic management (ATM) system (see also Chapter 7). It is a tool to support ATS in ensuring an optimum flow of air traffic in areas and at times when demand may exceed the available capacity of the air traffic control system. Specialized regional ATFM centres/units are being established to provide for relevant strategic, tactical and real-time ATFM functions. The tactical and real-time functions of the specialized ATFM centres may be supported by ATFM positions at ACCs. It is envisaged that global ATFM centres may be required in the future.*

- e) **ATS reporting office.** A unit established for the purpose of receiving reports concerning ATS and flight plans submitted before departure.

*Note.— An ATS reporting office may be established as a separate unit or combined with an existing unit, such as another ATS unit, or a unit of the AIS (see Chapter 6).*

- f) **Air-ground control radio station.** An aeronautical telecommunication station having primary responsibility for handling communications pertaining to the operation and control of aircraft in a given area.

The station may supply to aircraft, in coordination with the ATS unit concerned, meteorological information for flight information purposes. The station may also be involved in transmitting air-reports received from aircraft to the ATS units and meteorological watch offices (MWOs) concerned.

- g) **Rescue coordination centre (RCC).** A unit responsible for promoting efficient organization of search and rescue services and for coordinating the conduct of search and rescue operations within a search and rescue region.

RCC and rescue sub-centres (RSCs) promote the efficient organization of search and rescue, prepare plans for the conduct of search and rescue operations within their search and rescue regions and, when necessary, initiate and coordinate action by search and rescue units in accordance with these plans.

## 2.2 CENTRES, OFFICES AND STATIONS PROVIDING METEOROLOGICAL INFORMATION TO AERONAUTICAL USERS, INCLUDING ATS UNITS AND SEARCH AND RESCUE SERVICES CENTRES

2.2.1 It may be recalled that it is the responsibility of each State to determine, in accordance with Annex 3, Chapter 2, 2.1.3, and in accordance with regional air navigation agreements, the meteorological service which would meet the needs of international air navigation in that State. Furthermore, each State should designate the meteorological authority to provide or arrange for the provision of this meteorological service to international air navigation. In discharging its responsibilities, the meteorological authority may arrange for the provision of all or certain portions of that meteorological service by other professional entities on its behalf. Information regarding the designation of the meteorological authority and details relating to the provision of meteorological service to international air navigation by the meteorological authority are required to be included in the aeronautical information publication (AIP), in compliance with Annex 15 — *Aeronautical Information Services*, Chapter 5 (Annex 3, Chapter 2, 2.1.4 refers; see also Appendix 3 to this manual).

2.2.2 Meteorological service is provided by the following centres, offices and stations:

- a) **Aerodrome meteorological office.** An office designated to provide meteorological service for aerodromes serving international air navigation. An aerodrome meteorological office may be located at an aerodrome or at another location as determined by the State concerned. An aerodrome meteorological office carries out all or some of the following functions to meet the needs of flight operations at aerodromes:

— prepare and/or obtain forecasts and other relevant information (e.g. aerodrome warnings and wind shear warnings and alerts) for flights with which it is concerned; the extent of its responsibilities to prepare forecasts are to be related to the local availability and use of en-route and aerodrome forecast material received from other offices;

- prepare and/or obtain forecasts of local meteorological conditions (e.g. aerodrome forecasts (TAF));
- maintain a continuous survey of meteorological conditions over the aerodromes for which it is designated to prepare forecasts;
- provide briefing, consultation and flight documentation to flight crew members and/or other flight operations personnel;
- supply other meteorological information to aeronautical users, including associated ATS units (usually TWRs and APPs);
- display the available meteorological information;
- exchange meteorological information with other aerodrome meteorological offices; and
- supply information received on pre-eruption volcanic activity, a volcanic eruption and volcanic ash cloud to its associated ATS unit, AIS unit and MWO as agreed between the meteorological, AIS and ATS authorities concerned.

*Note.— For an aerodrome without an aerodrome meteorological office located at the aerodrome, the meteorological authority concerned designates one or more aerodrome meteorological office(s) which are to supply the required information.*

b) **Meteorological watch office (MWO).** A meteorological office designated, in accordance with regional air navigation agreement, to:

- maintain continuous watch over meteorological conditions affecting flight operations within its area of responsibility (a flight information region (FIR) or a control area or combinations thereof);
- prepare SIGMET and other information related to its area of responsibility;
- supply SIGMET information and, as required, other meteorological information to associated ATS units (i.e. ACC or FIC);
- disseminate SIGMET information;
- when required by regional air navigation agreement:
  - 1) prepare AIRMET information related to its area of responsibility;
  - 2) supply AIRMET information to associated ATS units; and
  - 3) disseminate AIRMET information;
- supply information received on pre-eruption volcanic activity, a volcanic eruption and volcanic ash cloud for which a SIGMET has not already been issued, to its associated ACC/FIC, as agreed between the meteorological and ATS authorities concerned, and to its associated volcanic ash advisory centre (VAAC) as determined by regional air navigation agreement; and
- supply information received concerning the release of radioactive materials into the atmosphere, in the area for which it maintains watch or adjacent areas, to its associated ACC/FIC, as agreed

between the meteorological and ATS authorities concerned, and to AIS units, as agreed between the meteorological and appropriate civil aviation authorities concerned. The information comprises location, date and time of the release, and forecast trajectories of the radioactive materials.

*Note 1.— MWOs are established by the States that accepted responsibility for providing ATS within an FIR or a control area.*

*Note 2.— In many cases, for efficiency, MWOs are collocated with an aerodrome meteorological office.*

*Note 3.— The information concerning the release of radioactive materials is provided by World Meteorological Organization (WMO) regional specialized meteorological centres (RSMCs) for the provision of dispersion model products for radiological environmental emergency response, at the request of the delegated authority of the State in which the radioactive material was released into the atmosphere, or the International Atomic Energy Agency (IAEA). This information is sent to a single contact point of the national meteorological service in each State. The contact point has the responsibility of redistributing the RSMC products within the State concerned. Furthermore, the information is provided by IAEA to the RSMC collocated with VAAC London (designated as the focal point) which in turn notifies the ACCs/FICs concerned about the release.*

- c) **Aeronautical meteorological station.** A station designated to make observations and issue meteorological reports for use in international air navigation.

These observations are used in the issuance of reports which the station disseminates locally at the aerodrome and beyond the aerodrome. Aeronautical meteorological stations make routine observations at fixed intervals. At aerodromes, the routine observations are to be supplemented by special observations whenever specified changes occur in respect of surface wind, visibility, runway visual range, present weather, clouds and/or air temperature.

*Note 1.— Local routine reports and local special reports (MET REPORT and SPECIAL), disseminated locally at the aerodrome, are intended for arriving and departing aircraft. Aerodrome routine and special meteorological reports (METAR and SPECI) issued for dissemination to aerodromes beyond the aerodrome of origin are mainly intended for flight planning, D-VOLMET and VOLMET broadcasts (see 3.6), etc. Trend forecasts are often attached to both types of reports.*

*Note 2.— In addition, an aeronautical meteorological station issues, as necessary, volcanic activity reports on the occurrence of pre-eruption volcanic activity, volcanic eruptions and volcanic ash cloud and disseminates them to the associated ATS unit, MWO and AIS unit concerned.*

*Note 3.— The local aeronautical meteorological station often provides its reports direct to the TWR and/or APP, i.e. not necessarily via the aerodrome meteorological office associated with these ATS units.*

- d) **World area forecast centre (WAFC).** A meteorological centre designated to prepare and issue significant weather forecasts and upper-air forecasts in digital form on a global basis direct to States using the aeronautical fixed service Internet-based services.
- e) **Tropical cyclone advisory centre (TCAC).** A meteorological centre designated by regional air navigation agreement to provide advisory information to MWOs, WAFCs and international operational meteorological (OPMET) data banks regarding the position, forecast direction and speed of movement, central pressure and maximum surface wind of tropical cyclones.

*Note.— The advisory information is prepared a) in support of the issuance of SIGMET information for tropical cyclones by MWOs; and b) for direct use by operators and flight crew members in flight planning.*

- f) **Volcanic ash advisory centre (VAAC).** A meteorological centre designated by regional air navigation agreement to provide advisory information to MWOs, ACCs, FICs, WAFs and international OPMET data banks regarding the lateral and vertical extent and forecast movement of volcanic ash in the atmosphere following volcanic eruptions.

*Note.— The advisory information is prepared in support of the issuance of SIGMET information for volcanic ash cloud by MWOs and b) for direct use by operators and flight crew members in flight planning. Each VAAC is a part of the ICAO International Airways Volcano Watch (IAVW). In the ACCs/FICs and AIS units, the advisory information is used in the issuance of NOTAM or ASHTAM concerning volcanic ash activity.*

2.2.3 While the meteorological offices and stations listed in 2.2.2 a) to c) form part of the national aeronautical meteorological infrastructure, the meteorological centres listed in 2.2.2 d) to f) represent international facilities organized under the auspices of ICAO.

### **2.3 LINKS BETWEEN ATS UNITS, RCCs/RSCs AND AERODROME METEOROLOGICAL OFFICES, METEOROLOGICAL WATCH OFFICES (MWOs) AND AERONAUTICAL METEOROLOGICAL STATIONS**

2.3.1 In order to achieve close and effective coordination between ATS units, RCCs/RSCs and aerodrome meteorological offices, MWOs and aeronautical meteorological stations, the meteorological authority in each State is required to designate aerodrome meteorological offices, MWOs and aeronautical meteorological stations to be associated with individual ATS units and RCCs/RSCs.

2.3.2 Aerodrome meteorological offices located at aerodromes are normally associated with local ATS units, i.e. TWRs and APPs. There are, however, many aerodromes where there is no aerodrome meteorological office located at the aerodrome. In such cases, the functions of the aerodrome meteorological office associated with the local ATS units at that aerodrome may be delegated to an aerodrome meteorological office located elsewhere (including at another aerodrome). These functions may be shared by two or more aerodrome meteorological offices.

2.3.3 MWOs are associated with an ACC and an FIC. The responsibilities of an MWO may be shared between two or more MWOs.

2.3.4 Aerodrome meteorological offices and MWOs are associated with RCCs/RSCs.

*Note.— Information on aerodrome meteorological offices and MWOs established by States to meet the requirements of international air navigation is published in the facilities and services implementation document (FASID) of the regional air navigation plans.*

2.3.5 The unavoidably close interrelationship between the local aeronautical meteorological station and the TWR and APP defines the link between the three parties. This link is often referred to as an aeronautical meteorological station being “associated” with the TWR and/or the APP.

2.3.6 The ATS units and the corresponding meteorological offices are summarized in Table 2-1.

**Table 2-1. ATS units and associated meteorological offices**

<i>ATS unit</i>	<i>Associated meteorological office</i>
Aerodrome control tower (TWR)	Aerodrome meteorological office
Approach control unit (APP)	Aerodrome meteorological office
Area control centre (ACC)	Meteorological watch office (MWO)
Flight information centre (FIC)	Meteorological watch office (MWO)

---

## Chapter 3

# METEOROLOGICAL INFORMATION FOR ATS AND SEARCH AND RESCUE SERVICES UNITS

### 3.1 INTRODUCTION

3.1.1 The meteorological information required by an ATS unit and provided by their associated aerodrome meteorological offices, MWOs and/or aeronautical meteorological stations includes nearly all types of aeronautical meteorological information. Detailed listings of this information are contained in this chapter. A summary of the types of information most frequently supplied to ATS units and to air-ground control radio stations (if established to serve associated ACCs/FICs), the meteorological offices and stations responsible for providing the information, the frequency with which it is usually provided and the communications means normally used for this purpose are given in Table 3-1.

3.1.2 In view of the importance of the meteorological information supplied to ATS units for the safety and efficiency of aviation, it is essential that the information is always kept up to date, accurate and provided in a timely manner. Of particular importance in this connection is information on significant changes in the meteorological conditions. Such changes include not only changes requiring the issuance of SPECI but may also include, as agreed, changes in wind, temperature, pressure and other elements that may require ATS units to take action (e.g. for change of the runway-in-use).

### 3.2 DISPLAYS/INSTRUMENTS IN ATS UNITS

3.2.1 It is essential that TWRs and APPs be equipped, as a minimum, with surface wind displays and, where such values are measured by instrumented means, runway visual range (RVR) values and displays providing current pressure data for the altimeter setting for the aerodrome, corresponding to those of the meteorological station at the local aerodrome. The displays in TWRs and APPs must provide the same information, and both must derive that information from the same sensors as the displays in the meteorological station at the aerodrome. Each display should be clearly labelled to show the location of the sensor to which it refers. This applies also to multiple anemometers used at many aerodromes. In those cases, it is usually arranged that ATS units need not be provided with local special reports (SPECIAL) indicating significant changes in elements which have displays in TWRs and APPs.

3.2.2 It is highly desirable that TWRs and APPs be equipped with remote displays providing:

- a) visibility;
- b) the height of the cloud base; and
- c) temperature and dew-point temperature.

3.2.3 It is important that the displays mentioned in 3.2.2 a) and b) be related to the same locations and fed from the same sensors as the corresponding displays in the aerodrome meteorological office and/or aeronautical meteorological station.

3.2.4 Integrated automatic systems for the acquisition, processing, dissemination and display, in real time, of the meteorological parameters affecting landing and take-off operations must be deployed at aerodromes with Category II, III A and III B instrument approach and landing operations. These systems are also desirable for Category I approach and landing operations. Information concerning meteorological elements and phenomena indicated on remote displays of such systems in ATS units should also comply with the principles given in 3.2.1 and 3.2.3.

### **3.3 INFORMATION FOR TWRs AND ATS UNITS PROVIDING APPROACH CONTROL SERVICE**

3.3.1 The following meteorological information is required to be supplied to a TWR, or ATS unit providing approach control service, by its associated aerodrome meteorological office and aeronautical meteorological station(s):

- a) local routine reports and local special reports (MET REPORT and SPECIAL), including trend forecasts, METAR and SPECI, TAF and amendments thereto, for the aerodrome concerned;
- b) SIGMET and AIRMET information (if appropriate), wind shear warnings and alerts, and aerodrome warnings and, in the case of an approach control unit, also appropriate special air-reports for the airspace with which it is concerned;
- c) any additional meteorological information as agreed locally (such as forecasts of surface wind for the determination of possible runway changes in the case of TWRs);
- d) information received on volcanic ash cloud, for which a SIGMET message has not already been issued, as agreed between the meteorological and ATS authorities concerned; and
- e) information received on pre-eruption volcanic activity and/or volcanic eruption and volcanic ash cloud as agreed between the meteorological and ATS authorities concerned.

3.3.2 If agreed between the meteorological authority and the appropriate ATS authority concerned, local special reports in respect of surface wind and other elements are not issued and supplied to a TWR, or an APP, if the TWR, or APP, has displays for these elements corresponding to the displays in the aeronautical meteorological station concerned. Similarly, local special reports in respect of RVR are not issued and supplied to a TWR, or an APP, if the TWR, or APP, and the aeronautical meteorological station concerned are equipped with corresponding RVR displays or if changes in RVR are continuously reported to the TWR, or APP, by an observer at the aerodrome concerned. It is important that the appropriate meteorological and ATS authorities develop an agreement on all aspects of this practice for inclusion in the Letter of Agreement referred to in 5.1.3.

3.3.3 Particular emphasis should be given to the occurrence or expected occurrence of a weather deterioration as soon as this can be determined. It should be noted that certain changes in the weather are regarded as “weather deteriorations”, although they may not ordinarily be considered as such. An increase in temperature may, for example, adversely affect aircraft performance.

3.3.4 Special emphasis on the observing and reporting of significant meteorological conditions in the vicinity of the aerodrome is also required, particularly in the climb-out and approach areas. These conditions include:

- a) cumulonimbus or thunderstorms;
- b) moderate or severe turbulence;
- c) wind shear, including microbursts;



- d) hail;
- e) severe squall line;
- f) moderate or severe icing;
- g) freezing precipitation;
- h) severe mountain waves;
- i) sandstorm;
- j) duststorm;
- k) blowing snow;
- l) funnel cloud (tornado or waterspout); and
- m) volcanic ash.

Where practicable, the information should identify the location of the phenomenon. The area to be covered by these observations normally extends to approximately 16 km from the aerodrome reference point. Some of this information can best be provided by relaying to TWRs, or APPs, relevant weather radar data, data from ground-based wind shear detection and remote-sensing equipment and data from automatic meteorological observing stations deployed in the vicinity of the aerodrome. Aircraft observations made during the climb-out or approach phases of flight represent an important source of information on significant weather phenomena in the vicinity of the aerodrome. This applies, in particular, to icing, turbulence and wind shear, including microbursts.

3.3.5 A TWR, or APP, receives information from its associated aerodrome meteorological office on pre-eruption volcanic activity, volcanic eruptions and volcanic ash cloud in accordance with 3.3.1 e). This vital information should be passed on, as necessary, to aircraft likely to be affected by these events, until the corresponding SIGMET and/or NOTAM/ASHTAM are issued by the MWO and/or ACC/AIS unit concerned.

### 3.4 INFORMATION FOR ACCs OR FICs

3.4.1 The following meteorological information is required to be supplied to an ACC or FIC by its associated MWO:

- a) METAR and SPECI, including current pressure data, trend forecasts and TAF (and amendments thereto) covering the FIR or the control area and, if required by the FICs or ACCs, covering aerodromes in neighbouring FIRs, as determined by regional air navigation agreement;
- b) forecasts of upper winds, upper-air temperatures and significant en-route weather and other phenomena in the atmosphere and amendments thereto (particularly those which are likely to render operations under visual flight rules impracticable), SIGMET and AIRMET information and appropriate special air-reports<sup>1</sup> covering the FIR or control area concerned and, if required, covering neighbouring FIRs/control areas;

---

1. Appropriate special air-reports are those which have not been incorporated in a SIGMET message.

- c) any other meteorological information required by the ACC/FIC to meet requests from aircraft in flight. If the information requested is not available in the associated MWO, another meteorological office will be requested to supply it;
- d) information received on volcanic ash cloud, for which a SIGMET message has not already been issued, as agreed between the meteorological and ATS authorities concerned;
- e) tropical cyclone advisory information issued by a TCAC for its area of responsibility;
- f) volcanic ash advisory information issued by a VAAC for its area of responsibility;
- g) information received concerning the release of radioactive materials into the atmosphere, as agreed between the meteorological and ATS authorities concerned; and
- h) information received on pre-eruption volcanic activity and/or volcanic eruption as agreed between the meteorological and ATS authorities concerned.

3.4.2 The METAR and SPECI, TAF for other aerodromes and the SIGMET and AIRMET information for other FIRs that are to be provided to the ACC/FIC are determined by regional air navigation agreement. They are normally those aerodromes and FIRs located within two hours' flying time of the border of the local FIR to which there is traffic, including overflying traffic. It should be noted, however, that in order to meet the requirements for extended range operations and flights conducted under centralized operational control, the exchange of OPMET messages determined by regional air navigation agreement may also include additional reports from aerodromes beyond the two hours' flying time. Furthermore, in view of the importance of SIGMET information concerning volcanic ash and tropical cyclones for long-haul flights, the dissemination of this information and appropriate special air-reports for volcanic ash cloud (see 4.2) should be extended beyond the two hours' flying time to cover the whole of the routes to be flown. The messages resulting from such exchanges of OPMET information should be made available to the ACCs and FICs as agreed between the meteorological and ATS authorities concerned.

3.4.3 Regional supplementary procedures governing the transmission of SIGMET to aircraft are given, for certain regions, in Doc 7030 — *Regional Supplementary Procedures*.

3.4.4 Special emphasis is required on the following significant en-route meteorological and other phenomena in the atmosphere that warrant the issuance of SIGMET and AIRMET:

- a) SIGMET for flights at cruising levels (irrespective of altitude):
  - thunderstorm
    - obscured, embedded, frequent or in a squall line
    - with or without heavy hail
  - tropical cyclone
  - severe turbulence
  - severe icing
  - severe icing due to freezing rain
  - severe mountain wave
  - heavy duststorm

- heavy sandstorm
  - volcanic ash (irrespective of altitude)
  - radioactive clouds
- b) AIRMET for flights below flight level 100 or flight level 150 in mountainous areas:
- surface wind speed
    - widespread mean wind speed above 15 m/s (30 kt)
  - surface visibility
    - widespread areas of visibility less than 5 000 m, including the weather phenomenon causing the reduction of visibility
  - isolated and occasional thunderstorms
    - with or without hail
  - mountain obscuration
  - cloud
    - widespread areas of broken or overcast cloud with height of base less than 300 m (1 000 ft) above ground level
    - isolated, occasional and frequent cumulonimbus clouds
    - isolated, occasional and frequent towering cumulus clouds
  - moderate turbulence (except for turbulence in convective clouds)
  - moderate icing (except for icing in convective clouds)
  - moderate mountain wave.

Special air-reports, and meteorological satellite and weather radar data can be used to detect many of these phenomena and will assist the MWO in the issuance of the corresponding SIGMET and AIRMET.

3.4.5 Any information concerning volcanic activity and volcanic ash in the atmosphere is very important for the safety of flights. MWOs should therefore pass on any available information regarding pre-eruption volcanic activity, volcanic eruptions and volcanic ash cloud that they receive to the associated ACCs/FICs and the AIS unit concerned so that this vital information can be passed on to aircraft likely to be affected, and a NOTAM, preferably in the ASHTAM format, can be issued. Wherever possible, the information should include date and time of message; location of volcano and name if known; concise description of event including level of intensity of volcanic activity, occurrence of an eruption and its date and time and the existence of a volcanic ash cloud in the area together with direction of ash cloud movement and height.

*Note 1.— The level of intensity of volcanic activity may be indicated in plain language or in the colour code for levels of alert given in the Procedures for Air Navigation Services — Aeronautical Information Management (PANS-AIM, Doc 10066), Appendix 5.*

*Note 2.— Aeronautical meteorological stations observing volcanic ash or volcanic activity issue such information as a VOLCANIC ACTIVITY REPORT (Annex 3, Chapter 4, 4.8 refers).*

*Note 3.— Close coordination is required between the MWO, ACC/FIC and AIS units to ensure that information on volcanic ash provided in SIGMET and ASHTAM/NOTAM is consistent. In particular, information received from national vulcanological agencies (e.g. using the volcanic activity colour code in the PANS-AIM (Doc 10066), Appendix 5, 3.5, should be exchanged between the MWO, ACC/FIC and AIS units.*

3.4.6 As was mentioned in 2.2.2 f), VAACs, designated within the international airways volcano watch (IAVW), issue volcanic ash advisory information regarding the lateral and vertical extent and forecast movement of volcanic ash in the atmosphere following volcanic eruptions. The advisory information provides forecast extent and movement of the volcanic ash for a period of eighteen hours. The volcanic ash advisory information issued by a VAAC is required to be supplied by the VAAC to those MWOs, ACCs, FICs and other VAACs whose area of responsibility may be affected, and to WAFCs, international OPMET data banks, international NOTAM offices, and centres designated by regional air navigation agreement for the operation of AFS Internet-based services.

3.4.7 States which deal with large amounts of traffic sometimes have found it expedient to station meteorologists in the ACC or ATFCM. Apart from ensuring that the unit is supplied with all the necessary meteorological information, the duty of the meteorologist is mainly to advise controllers on meteorological conditions that could influence the progress of traffic in their areas of responsibility, such as widespread thunderstorms, changes in jetstream configuration or heavy snowfalls over large areas. This advice is of particular importance where quick decisions are needed in the face of rapid weather developments or in cases of in-flight emergencies.

### **3.5 INFORMATION FOR ATS UNITS PROVIDING SERVICE FOR LOW-LEVEL FLIGHTS**

#### **Meteorological information required by the ATS units for low-level flights**

3.5.1 Information on en-route meteorological conditions for low-level flights, including flights under visual flight rules (VFR), should cover the layer between the ground and flight level 100 (or up to flight level 150 in mountainous areas, or higher, where necessary). Owing to the variability of meteorological conditions, which may be markedly affected by the surrounding topography, information on actual en-route weather conditions and the relevant forecasts to be supplied to ACCs/FICs and/or to respective VFR positions in the centres are usually specified for smaller topographically homogenous geographical sub-areas of the FIR/control area concerned. Such sub-areas are defined by the meteorological authority in coordination with users and the ATS authority.

3.5.2 In view of the higher sensitivity of low-level flights and, in particular, VFR operations, to some weather conditions and phenomena, the information supplied to the ATS units concerned should include detailed specifications regarding the horizontal and vertical distribution of these conditions and phenomena and their intensity. Low cloud base and visibility conditions represent limiting factors for low-level flights, particularly VFR flights. It is clear that the meteorological phenomena that may affect the safety of flight operations at cruising levels and are subject to the issuance of SIGMET information also affect the safety of low-level operations. In addition, there are other weather phenomena (such as moderate icing, moderate turbulence, isolated thunderstorms, cumulonimbus (CB) and towering cumulus (TCU) clouds, mountain obscuration, moderate mountain wave, and areas with widespread strong surface wind) that are of significance to the safety of low-level flight operations (see 3.4.4 a) and b)). Information concerning all of these phenomena should be supplied to the ATS units concerned.

3.5.3 The processed data from ground-based weather radar and meteorological satellites may complement the information on actual weather conditions obtained from meteorological stations and aircraft in flight. These data are important for the issuance of forecasts and advisories prepared to support low-level operations.

3.5.4 The meteorological information to be supplied to ACCs/FICs, as outlined in 3.4.1, constitutes the basis for the information to be supplied to the ATS units providing the service for low-level operations. Nevertheless, it is important that *all* available information on weather conditions which are likely to render low-level operations en route

impracticable, including VFR flights, is made available to the ATS units concerned. All special and non-routine aircraft observations and reports received (or obtained), together with the relevant SIGMET in force, should be closely watched and employed by personnel. The role and purpose of AIRMET information are discussed below.

3.5.5 Pressure data for altimeter settings throughout the FIR/control area concerned should be available in the ATS units concerned. The lowest QNH forecast values for the FIR/control area or their sub-areas should be made available to the ACCs/FICs (and their VFR positions) concerned.

3.5.6 Upper wind and upper-air temperature forecasts supplied to the ATS units should relate to the layer up to flight level 100, or 150 or higher in mountainous terrain, and should be presented at least for the altitudes of 600, 1 500 and 3 000 m (2 000, 5 000 and 10 000 ft) and 4 500 m (15 000 ft) in mountainous areas and for points separated by no more than 500 km (300 NM). The height indications of freezing level(s) for the layer should also be included, if applicable.

3.5.7 TAF, trend forecasts (where required), aerodrome warnings, wind shear warnings and alerts should be available in the ATS units concerned to be used in support of the approach, landing, take-off and climb-out phases of low-level flights.

#### **Format of area forecasts for low-level flights**

3.5.8 Forecasts for low-level flights are routinely issued only when the density of traffic operating below flight level 100 (or up to flight level 150 in mountainous areas, or higher, where necessary) warrants their issue and dissemination for such operations. If that is the case, the meteorological authority has to determine, in consultation with the users and the ATS authority, the following aspects of such forecasts:

- a) frequency of issue;
- b) format;
- c) fixed time or period of validity; and
- d) criteria for amendments.

3.5.9 Where warranted by the density of low-level traffic and, in accordance with regional air navigation agreement, AIRMET information is issued by appropriate MWOs. This information gives a concise description in abbreviated plain language concerning the occurrence and/or expected occurrence of specified en-route weather phenomena that were not forecast in the area forecast for low-level flights issued by the designated aerodrome meteorological office or MWO and provided to pilots. The criteria for the issuance of AIRMET information are given in 3.4.4 b). The format of area forecasts issued in support of the issuance of AIRMET information has to be agreed between the meteorological authorities in the States concerned (i.e. the meteorological authorities which are parties to the regional air navigation agreement concerning the issuance of AIRMET information) and should be selected from the following two options:

- a) GAMET area forecasts if abbreviated plain language is used; or
- b) combination of upper wind and upper-air temperature and low-level significant weather (SIGWX) forecasts if chart form is used.

GAMET forecasts are issued in two sections with the first produced primarily to support the AIRMET information and the second to provide supplementary information required by low-level flights. Complete GAMET forecasts may be used at ATS units, together with relevant AIRMET, as complete area forecasts for low-level flights.

3.5.10 Detailed provisions concerning the content and format of area forecasts for low-level flights including the GAMET message format are given in Annex 3, Appendix 5.

3.5.11 Area forecasts for low-level flights (including GAMET area forecasts), prepared to support the issuance of AIRMET information, are issued every six hours for a period of validity of six hours.

#### **Information to be supplied to low-level flights by the ATS units**

3.5.12 It should be noted that the meteorological information dealt with in 3.5.1 to 3.5.11 is used by ATS units mostly for flight information service purposes. ATS units providing service for low-level operations must also ensure that:

- a) SIGMET messages are relayed, as appropriate, to aircraft in flight;
- b) special air-reports are relayed, as appropriate, to aircraft in flight until such time as a corresponding SIGMET is issued; and
- c) where AIRMET information is issued in accordance with regional air navigation agreement, this information is relayed, as appropriate, to aircraft in flight.

### **3.6 INFORMATION FOR AIR-GROUND CONTROL RADIO STATIONS, VOLMET BROADCASTS AND UPLINK OF OPMET DATA TO AIRCRAFT IN FLIGHT**

3.6.1 Where necessary for flight information purposes, METAR and SPECI, and TAF can be supplied to air-ground control radio stations. A copy of such information is to be forwarded to the ACC or FIC concerned.

3.6.2 The ATS unit designated to provide VHF or HF VOLMET broadcasts, in accordance with the relevant requirement in the regional air navigation plan, will be supplied with the necessary METAR/SPECI and, if required, associated trend forecasts, SIGMET messages and TAF, from a meteorological office or a communications centre designated by the meteorological authority. Guidance on the phraseologies to be used when compiling VOLMET broadcast transmissions is given in Appendix 1.

3.6.3 In the CNS/ATM environment, many of the flight information services carried out at present using continuous broadcasts, general calls or directed transmissions from the appropriate ATS unit will be replaced by data link services. Two specific data link services have already been developed for meteorological information, which will require coordination between the ATS and meteorological authorities concerned:

- a) data link VOLMET service (D-VOLMET); and
- b) data link automatic terminal information service (D-ATIS).

The D-VOLMET and D-ATIS will replace the corresponding VOLMET and ATIS broadcasts. The D-VOLMET service will include the data link flight information service (D-FIS), including METAR/SPECI, SIGMET and TAF applications.

3.6.4 Particular attention should be drawn to the specifications for the meteorological parameters to be included in the data link services applications. In principle, they should be similar to the corresponding existing broadcasts. When arranging for the uplink of meteorological information to aircraft in flight, the ATS and meteorological authorities concerned should ensure that:

- a) in the D-VOLMET data link service (and in VOLMET broadcasts), the meteorological information included should be in accordance with the respective regional air navigation agreement and have the format and content of a meteorological report disseminated beyond the aerodrome (e.g. METAR); and

- b) in the D-ATIS data link service (as in the existing ATIS broadcast), the meteorological information included should be in accordance with the meteorological reports disseminated locally at the aerodrome (i.e. local routine reports and local special reports).

In practice, the ATS and meteorological authorities concerned must ensure that the appropriate sensors and averaging periods are used in each data link service. For example, in the D-VOLMET, the wind information should be averaged over ten minutes and be representative of the conditions above the whole runway complex, while in the D-ATIS it should be averaged over two minutes and be representative of the conditions along the runway and at the touchdown zone.

*Note.— Detailed specifications for the meteorological reports (i.e. MET REPORT and SPECIAL, and METAR and SPECI) can be found in Annex 3, Chapter 4 and Attachment D. Provisions related to VOLMET are included in Annex 3, Chapter 11, 11.5 and 11.6 and provisions concerning ATIS are included in Annex 11, Chapter 4, 4.3.4 to 4.3.9.*

### 3.7 INFORMATION FOR RCCs AND RSCs

3.7.1 Information to be supplied on request to RCCs and RSCs should include the meteorological conditions that existed in the last known position of a missing aircraft and along the intended route of that aircraft with particular reference to:

- a) significant en-route weather and other phenomena in the atmosphere;
- b) cloud amount and type (particularly cumulonimbus), and height indications of bases and tops;
- c) visibility and phenomena reducing visibility;
- d) surface wind and upper wind;
- e) state of ground, in particular, any snow cover or flooding;
- f) sea-surface temperature, state of the sea or significant wave height, ice cover if any and ocean currents, if relevant to the search area; and
- g) sea-level pressure data.

3.7.2 On request from the RCC, the designated meteorological office (usually the associated MWO) should arrange to obtain for the RCC and RSC details of the meteorological forecast given in the flight documentation supplied to the missing aircraft and any amendments subsequently issued. It should also supply to aircraft and/or ships undertaking search and rescue operations information on current and expected meteorological conditions en route to and in the search area or at the scene of the accident.

### 3.8 FORMAT OF INFORMATION

3.8.1 The meteorological information supplied to ATS units should be in a form, as agreed locally, enabling easy interpretation (i.e. direct reading as much as possible).

3.8.2 Existing aeronautical meteorological alphanumeric codes are generally accepted by flight crews and ATS personnel as requiring a minimum of interpretation. Local routine reports and local special reports (MET REPORT and

SPECIAL), and SIGMET and AIRMET messages must be in accordance with the templates included in Annex 3, Appendices 3 and 6, respectively.

3.8.3 When upper wind, upper-air temperature and humidity information is supplied to ATS units in digital form for use by ATS computers and automatic information systems, the contents, format and transmission arrangements are to be as agreed between the meteorological and ATS authorities. Where the data are supplied in a code form prescribed by WMO, use is to be made of the GRIB code form which is applied to upper wind, upper-air temperature and humidity forecasts issued by WAFCs of the WAFS.

*Note.— The GRIB code form is contained in WMO Publication No. 306 — Manual on Codes, Volume I.2, Part B — Binary Codes.*

3.8.4 Some meteorological information, such as processed weather radar and satellite data, tropical cyclone and volcanic ash advisory information, and wind shear warnings and alerts, may be supplied to ATS units in graphical format, as agreed between the meteorological and ATS authorities concerned. Such information may be supplied for display at various ATS units as separate meteorological information or jointly with ATS information. In this regard, it should be reiterated that such meteorological information is intended to assist ATS personnel in discharging their responsibilities with minimum additional workload. For this reason, it needs to be user-friendly and easy to read and interpret.

### 3.9 EMERGENCIES

3.9.1 Any meteorological information requested by an ATS unit or an RCC or RSC in connection with an aircraft emergency is to be supplied as rapidly as possible. Following notification by the ATS unit in charge that an aircraft accident/incident has occurred in the vicinity of an airport, aeronautical meteorological stations should:

- a) make a special accident/incident observation, either manually or prompted through the automated observing system in use;
- b) mark the time on all instrument recordings; and
- c) ensure that all pertinent meteorological observation and forecast data are retained for at least 30 days.

3.9.2 Copies of the flight documentation that was supplied to flight crew members and which, in accordance with Annex 3, Chapter 9, 9.3.4, is to be retained or stored in computer memory for a period of at least 30 days, should be made available on request for aircraft accident/incident inquiries. The flight documentation produced by the relevant WAFC (significant weather forecasts, upper-air forecasts, etc.) and supplied to the personnel involved in the accident/incident investigation should, if necessary, be validated by the WAFC concerned.

### 3.10 COMMUNICATION BETWEEN ATS UNITS AND METEOROLOGICAL CENTRES, OFFICES AND STATIONS

3.10.1 Suitable telecommunications facilities should be provided to permit meteorological offices and aeronautical meteorological stations to supply the necessary meteorological information to ATS units and to respond quickly to requests for non-routine information. The telecommunications facilities should also permit the transmission of meteorological information and requests for information from ATS units to meteorological offices and stations. It is particularly important that the telecommunications facilities permit the rapid and reliable exchange of information between aerodrome meteorological offices and search and rescue services units.



3.10.2 Telecommunications facilities between aerodrome meteorological offices and/or aeronautical meteorological stations, and TWRs and/or APPs should permit communications by direct speech, the speed with which such communications can be established being approximately 15 seconds. (This requirement can be met if switchboards are used.)

3.10.3 Telecommunications facilities between aerodrome meteorological offices or MWOs and ACCs, FICs and/or RCCs/RSCs should permit contacts between the respective offices and centres to be established within approximately 15 seconds. In addition, for printed communications, when a record is required, the transit time should not exceed 5 minutes

3.10.4 The telecommunications facilities mentioned in 3.10.1 to 3.10.3 may be supplemented by other forms of communications (e.g. data, visual and audio).

3.10.5 Although computerized automated information systems, automatic meteorological observing stations, automatic data transfer using keyboard input and video display units (VDUs) are employed for transmitting information from meteorological offices and stations to ATS units, this does not remove the need for efficient speech circuits.

3.10.6 Where non-routine data (local special reports, SIGMET and AIRMET information, warnings, etc.) are transmitted in addition to routine data via methods such as automated information systems, automatic meteorological observing stations, VDUs and audio communications, aural and visual arrangements are needed to draw attention to this information (e.g. by means of a cueing feature). If such messages are supplied by direct-speech communications, a confirmatory hard copy of these messages may also be required.

3.10.7 In an increasing number of cases, information is supplied to certain ATS units (particularly ACCs/FICs) by more than one meteorological office, using various sources of information and methods of communication. In such cases, an agreement should be developed between the meteorological and ATS authorities concerned regarding the supply of necessary OPMET messages to ACCs and FICs direct from international sources of OPMET information (e.g. AFS satellite broadcast and Internet-based services and ICAO regional schemes for OPMET data exchange, such as the Africa-Indian Ocean Region MET Bulletin Exchange (AMBEX), European regional OPMET data exchange (EUR RODEX) and Regional OPMET Bulletin Exchange (ROBEX)). Similarly, ACCs and FICs may be offered access to the communications systems/networks of the meteorological authority of the State concerned and to international OPMET data banks.

3.10.8 Finally, it should be noted that suitable means of communication should be agreed upon for the transmission of tropical cyclone and volcanic ash advisories from TCACs and VAACs to the ACCs and FICs concerned.

**Table 3-1. Aeronautical meteorological information supplied to ATS units**

<i>Information</i>	<i>Distributor</i>	<i>Destination</i>	<i>Frequency</i>	<i>Communications means</i>
METAR and local routine reports with trend forecast*, as required	Aeronautical MET station [trend forecast prepared by aerodrome MET office]	TWR APP ACC FIC COM station	Hourly**	See Note 1 See Note 1 See Note 1 See Note 1 See Note 2
SPECI and local special reports with trend forecast*, as required	Aeronautical MET station [trend forecast prepared by aerodrome MET office]	TWR APP ACC FIC COM station	When warranted	See Note 1 See Note 1 See Note 2 See Note 2 See Note 2
TAF	Aerodrome MET office	TWR APP ACC FIC COM station	Every 3 or 6 hours	See Note 1 See Note 1 See Note 1 or 2 See Note 1 or 2 See Note 2
Aerodrome warnings	Aerodrome MET office	TWR APP COM station Aerodrome services	When warranted	See Note 1 See Note 1 or 2 See Note 2
Upper-wind and temperature forecasts	Aerodrome MET office and/or MWO (data to be obtained through the WAFS)	ACC FIC	Every 6 hours (if required)	See Note 2 See Note 2
Significant en-route weather forecast	Aerodrome MET office and/or MWO (data to be obtained through the WAFS)	ACC FIC	Every 6 hours	See Note 2
SIGMET and AIRMET	MWO	TWR APP ACC FIC COM station	When warranted	See Note 1 See Notes 1 and 2 See Notes 1 and 2 See Notes 1 and 2 See Note 2
Wind shear warnings and alerts	Aerodrome MET office	TWR APP	When warranted	See Note 1 See Note 1
Tropical cyclone advisory	TCAC/MWO	ACC FIC	When warranted	See Notes 1 and 2
Volcanic ash advisory	VAAC/MWO	ACC FIC	When warranted	See Notes 1 and 2

---

<i>Information</i>	<i>Distributor</i>	<i>Destination</i>	<i>Frequency</i>	<i>Communications means</i>
Information on release of radioactive material, i.e. location of the release and forecast trajectories of the radioactive material	MWO (normally, the information obtained from the WMO RSMC concerned) VAAC London (focal point)	ACC FIC	When warranted	See Notes 1 and 2
Information on volcanic eruptions and volcanic ash for which a SIGMET has not yet been issued.	MWO VAAC	TWR APP ACC FIC	When warranted	

\* Trend forecasts to be added to local reports and METAR/SPECI for those stations so identified in the air navigation plan.

\*\* Or half-hourly if so decided by regional air navigation agreement.

*Note 1.— Communications by intranet, video display unit or similar. If none of these are available, or during unserviceability periods, communications by phone, followed if possible by confirmation by other means.*

*Note 2.— Communications by teleprinter or by Internet for non-time-critical operational meteorological information.*

---



## Chapter 4

# METEOROLOGICAL INFORMATION RECEIVED BY ATS UNITS FROM SOURCES OTHER THAN THE ASSOCIATED METEOROLOGICAL OFFICES AND STATIONS

### 4.1 OBSERVING AND REPORTING OF METEOROLOGICAL INFORMATION BY ATS UNITS

4.1.1 As ATS units may have to provide information to aircraft at very short notice, and as even the best observation methods and the fastest communication means between aerodrome meteorological offices and ATS units cause some time lag between the occurrence of a change in the meteorological conditions and the transmission of relevant information to aircraft, arrangements often exist whereby ATS personnel are given sufficient training to allow them to update routine observations provided by meteorological stations so as to reflect the changed conditions. Such arrangements, of course, require close coordination between the ATS unit and the meteorological office or station, and the type of information to be observed and reported is subject to specific local agreements between MET and ATS authorities.

4.1.2 In view of their location on high towers, aerodrome controllers can often observe certain meteorological features of operational significance better than meteorological personnel. Such observations, which may include, for example, meteorological conditions in approach and climb-out directions, would not only be used by controllers to update or amplify observations provided by the meteorological station (where such actions are agreed), but would also normally be provided to the meteorological station or office.

4.1.3 Adequate basic training in meteorological observations is to be provided to the ATS personnel concerned. In some States, ATS personnel are given training in meteorology to a level commensurate with their responsibilities in making these supplementary meteorological observations at aerodromes. These States may also issue specific “meteorological validations” to the air traffic controller licence on the basis of successful completion of concentrated meteorological-observing courses. This has the advantage of satisfying all concerned of their proficiency in this field.

*Note 1.— The required qualifications for air traffic controllers making the meteorological observations described in 4.1.1 to 4.1.3 are specified by WMO (Annex 1 — Personnel Licensing, Note to 4.5.1 refers).*

*Note 2.— In some States, selected ATS personnel may also assume responsibility for the manual insertion into automatic meteorological observing stations/systems at aerodromes of data and phenomena that cannot be observed satisfactorily by the automatic system in use. Such activity by ATS personnel must be based on an agreement between the meteorological and ATS authorities. A syllabus for training courses in this respect can be found in the ICAO Training Manual (Doc 7192).*

### 4.2 REPORTS OF AIRCRAFT OBSERVATIONS RECEIVED IN ATS UNITS

4.2.1 Detailed provisions for air-reporting, including those concerning automated air-reporting using data link in the CNS/ATM systems environment, are included in Annex 3, Chapter 5 and Appendix 4, and in Chapter 4 of the PANS-ATM. Specific instructions for air-reporting using voice communications are spelled out in Appendix 1 to the PANS-ATM.

Procedures in the SUPPS-Air Traffic Services part of Doc 7030 provide the specifications applicable to individual ICAO Regions.

4.2.2 The responsibilities of pilots and ATS and meteorological authorities in ensuring the efficient implementation of the air-reporting procedures are outlined below. It should be stressed that the implementation of these procedures is of vital importance and that all parties involved should do their utmost to adhere to the procedures to ensure the timely issuance of safety-related SIGMET which is largely dependent on the prompt receipt by MWOs of special air-reports from ATS units.

### **Air-reporting: action required by the parties involved**

#### ***Pilots: CNS/ATM systems environment***

4.2.3 When automatic dependent surveillance – contract (ADS-C) or secondary surveillance radar (SSR) Mode S is being applied, routine air-reports are part of the reporting contract which is controlled by the ATS.

4.2.4 With regard to special air-reports, it is *essential* that pilots initiate a special air-report when any of the following conditions are encountered or observed:

- a) severe turbulence;
- b) severe icing;
- c) severe mountain wave;
- d) thunderstorms, without hail, which are obscured, embedded, widespread or in squall lines;
- e) thunderstorms, with hail, which are obscured, embedded, widespread or in squall lines;
- f) heavy duststorm or heavy sandstorm;
- g) volcanic ash cloud; or
- h) pre-eruption volcanic activity or volcanic eruption.

*Note.— Pre-eruption volcanic activity in this context means unusual and/or increasing volcanic activity which could presage a volcanic eruption.*

In spite of the fact that special air-reports will be included in the D-FIS applications in the future, it is worth emphasizing that these special air-reports will still have to be initiated by the pilot by selecting (e.g. from a menu displayed in the cockpit) the appropriate condition (e.g. heavy sandstorm). The additional information required by the MWOs (e.g. latitude, longitude, altitude, time, wind and temperature) is automatically included in the special air-report, without any pilot intervention.

*Note.— Detailed information concerning D-FIS is provided in the ICAO Manual of Air Traffic Services Data Link Applications (Doc 9694).*

**Pilots: voice communications environment**

4.2.5 Aircraft not equipped with air-ground data link are altogether exempted from making routine aircraft observations. This exemption was introduced in view of the availability of a large number of routine aircraft observations through the WMO aircraft meteorological data relay (AMDAR) system.

4.2.6 Special voice reports, however, will continue to be required whenever the D-FIS application is not available and whenever conditions listed under 4.2.4 are encountered. Detailed instructions for reporting are included in the MODEL AIREP SPECIAL form in Appendix 1 to the PANS-ATM.

4.2.7 Finally, it should be noted that the requirement for written post-flight reports continues for volcanic ash but has been deleted for all other phenomena.

**ATS personnel: CNS/ATM systems environment**

4.2.8 In the CNS/ATM systems environment, the requirement to make routine air-reports will be met by sending ADS-C or SSR Mode S reports with the basic ADS-C/SSR Mode S data block combined with the meteorological information data block. The appropriate ATS authority must ensure that the ADS-C/SSR Mode S contract is such that the meteorological information is provided every 15 minutes during the en-route phase and every 30 seconds during the climb-out phase for the first 10 minutes of the flight.

4.2.9 There will be no exemptions in the CNS/ATM systems environment. However, designation procedures may be prescribed in individual regions by regional air navigation agreement for flights on routes with high-density air traffic (e.g. organized tracks). Such designation procedures to be applied by ACCs, i.e. the FIRs and times for which the term "high-density air routes" is applicable, must be identified by the ICAO regional planning and implementation groups concerned and included in the SUPPS-Air Traffic Services and SUPPS-Meteorology parts of Doc 7030. It is envisaged that one aircraft per air route and per flight level from among those aircraft operating on these high-density air routes will be designated, at approximately hourly intervals, to report to the ACC concerned.

4.2.10 In addition to the requirement to establish an ADS-C/SSR Mode S contract with the appropriate reporting frequency, the ATS authority concerned is obliged to route the relevant blocks of the ADS-C/SSR Mode S message (i.e. the basic ADS-C/SSR Mode S data block and the meteorological information data block) automatically to WAFCs London and Washington and to their associated MWOs. Since the routing and processing of messages will be carried out by automated computerized communications systems, the ATS authority concerned need only ensure that the addresses of the WAFCs and the associated MWOs are included in the software and that the computer programme strips off the unnecessary blocks of the full ADS-C/SSR Mode S message (leaving only the basic ADS-C/SSR Mode S and meteorological information data blocks) before transmitting it to the WAFCs and MWOs. On receipt of the air-reports, the WAFCs will make them available to States, as necessary, through the WMO global telecommunication system (GTS), as basic data. It may also be noted that routine air-reports are increasingly being used in automated ATM systems (i.e. for accurate flight trajectory forecast purposes).

4.2.11 With regard to special air-reports in the CNS/ATM systems environment, ATS personnel have a two-fold responsibility:

- a) to pass on the information to other aircraft concerned (for details on the methods to be used in the CNS/ATM systems environment, see 4.2.13); and
- b) to route the information to the associated MWO and to WAFCs London and Washington.

It is essential that, in addition to the WAFCs, the associated MWO be included as an addressee in the telecommunications software since the issuance of SIGMET is largely based on the timely receipt of special air-reports.

**ATS personnel: voice communications environment**

4.2.12 On receipt of special air-reports through voice communications, ATS personnel should compile a message and send it without delay to their associated MWO. To assist in the compilation of this message and to ensure a standard structure, instructions have been included in Appendix 1 to the PANS-ATM.

4.2.13 ATS personnel must ensure that special air-reports are passed on to all aircraft concerned without delay. Special air-reports should be treated as the equivalent of SIGMET until such time that a corresponding SIGMET, superseding the special air-report, is received from the associated MWO.

**MET personnel: CNS/ATM systems environment**

4.2.14 MWOs and aerodrome meteorological offices receiving routine air-reports use them as any other basic meteorological data (e.g. upper-air soundings); no ICAO provisions exist concerning their use. The aeronautical requirement to use routine air-reports as briefing material has been deleted from Annex 3.

4.2.15 On receipt of special air-reports, the MWO has two options:

- a) to issue corresponding SIGMET information; or
- b) to decide that the issuance of SIGMET information is not warranted and to so inform the ACC/FIC (e.g. the phenomenon concerned is of a transient nature).

In the former case, no further distribution of the underlying air-report is required; in the latter case, the MWO has to disseminate the special air-report in the same way as a SIGMET for a period of sixty minutes after its issuance to ensure that recipients, including the ACCs/FICs concerned, are aware that the phenomenon has been reported by an aircraft.

**MET personnel: voice communications environment**

*Note.— No routine air-reports by voice communications are issued.*

4.2.16 Special air-reports received by the MWO through voice communications must be routed without delay to WAFCS London and Washington. Furthermore, as in the case of special air-reports received through data link, the MWO must decide whether or not the special air-report warrants the issuance of SIGMET information. If it does not, the special air-report itself must be distributed in the same manner as SIGMET information and the ACC/FIC informed accordingly.

4.2.17 Finally, if the MWO receives a special air-report related to pre-eruption volcanic activity, volcanic eruptions or volcanic ash cloud, it has the additional obligation to transmit that message without delay to the associated VAAC.

4.2.18 Table 4-1 summarizes the action to be taken on air-reports received by ATS units.

4.2.19 In addition to the requirements for aircraft observations and air-reports discussed in the previous paragraphs, a requirement also exists for non-routine aircraft observations. These are prompted when meteorological conditions are encountered that are not on the list of criteria for special aircraft observations and special air-reports (see 4.2.4) and which, in the opinion of the pilot-in-command, may markedly affect the safety or efficiency of other aircraft operations (e.g. wind shear). Reports of these meteorological conditions should, on their receipt in ATS units, be transmitted without delay to all aircraft concerned and to associated meteorological offices and stations (as agreed locally).



**Table 4-1. Action to be taken on air-reports received by ATS units**

Action	Air-reports		
	Via data link (CNS/ATM environment)		Via voice communications
	Routine	Special	Special
Received in:	ATS data link centre	ATS data link centre ACC/FIC APP/TWR	ACC/FIC <sup>1)</sup> APP/TWR
Used by:	— <sup>2)</sup>	ACC/FIC <sup>3)</sup> APP/TWR <sup>4)</sup>	ACC/FIC <sup>3)</sup> APP/TWR <sup>4)</sup>
Relayed to:	MWO <sup>5)</sup> WAFCS <sup>5)</sup>	MWO <sup>5)</sup> WAFCS <sup>5)</sup>	MWO WAFCS <sup>6)</sup>

Notes:

- 1) Special air-reports may be received by an air-ground control radio station related, in particular, to certain ACCs/FICs. All the special air-reports received by such a station must be transmitted without delay to the ACC/FIC concerned and to the MWO associated with the ACC/FIC.
- 2) Air-reports (e.g. winds reported from the climb-out phase of flight) could be used in ATM automated systems for the sequencing of aircraft approaches.
- 3) Pass on all special air-reports received to all aircraft concerned until the ACC/FIC receives the corresponding SIGMET superseding the special air-reports, or for a period of 60 minutes.
- 4) Pass on all special air-reports received (including non-routine reports) to all aircraft concerned, for a period of 60 minutes.
- 5) Automatic relay by the ATS data link centre.
- 6) The MWO or the meteorological authority arranges for the transmission of the air-reports to WAFCS.



## Chapter 5

# COORDINATION BETWEEN ATS UNITS AND METEOROLOGICAL OFFICES AND STATIONS

### 5.1 GENERAL

5.1.1 As shown in the preceding chapters, both ATS units and meteorological offices and stations provide meteorological information for aviation. In many cases, the ATS units and the meteorological offices and stations are at the same aerodrome and serve the same aircraft, air routes and/or areas. To achieve the best service for aviation, close coordination of their efforts is necessary, and there is therefore an important need for continuing consultation and coordination between these units, offices and stations at the local level, and for an efficient exchange of information between them.

5.1.2 The following information and guidance is aimed at improving the coordination between ATS units and meteorological offices and stations, both at the administrative level (i.e. between the ATS authority and the meteorological authority) and at the operational level (i.e. between the ATS units and aerodrome meteorological offices and aeronautical meteorological stations serving the same aerodrome and the ACCs/FICs and MWOs concerned).

5.1.3 At the administrative level, proper coordination can best be achieved by concluding a written Letter of Agreement between the ATS authority and the meteorological authority (see Annex 3, Chapter 4, 4.2). Such agreements are especially necessary where the provision of ATS and aeronautical meteorological services are not the responsibility of the same government department. An agreement is a very desirable instrument because:

- a) it provides a systematic listing of services and responsibilities which, taking into account the complexity of the subject, can assist greatly in ensuring a complete and efficient meteorological service to air navigation;
- b) the meteorological service is often provided by offices and stations of the meteorological authority different from that responsible for the ATS; the preparation of the agreement assists in bringing about a better understanding of the needs and capabilities of the parties involved; and
- c) the provision of meteorological service to air navigation may at times involve legal aspects (e.g. during inquiries into incidents or accidents) for which clear and unambiguous allocation of responsibilities is essential.

5.1.4 In fact, agreements between the ATS and meteorological authorities concerned are not only desirable and useful but are also explicitly called for in the various Standards and Recommended Practices (SARPs) and Procedures of Annexes 3, 11 and 12 and the PANS-ATM (see Annex 11, 2.20, 4.2.3 and 7.1.1.3, and the PANS-ATM, Chapter 11). In other cases, the need for agreements is strongly justified, i.e. where services or the methods with which they are to be rendered are to be carried out "in consultation".

5.1.5 The Letter of Agreement should normally specify the following:

- a) arrangements for meetings, at operational and administrative levels, between the heads of ATS units and meteorological offices and stations to discuss requirements for meteorological information,

methods of meeting these requirements and changes in local procedures necessitated by changes in operations. The arrangements should also provide for the involvement, as necessary, of AIS, communications, airport management and operator representatives for coordination purposes;

- b) in broad terms, the:
- 1) requirements for meteorological information;
  - 2) means to be used for exchanging/supplying that information;
  - 3) responsibilities and functions of the ATS units and meteorological offices and stations involved; and
  - 4) designation of the meteorological offices associated with individual ATS units and search and rescue services centres;
- c) arrangements for automatic air-reporting (i.e. routine and special air-reports via data link) and manual air-reporting (i.e. special air-reports via voice communications) in the FIRs/control areas concerned, including:
- 1) arrangements for automatic air-reporting, including the climb-out phase of flight (i.e. contracts for ADS-C/SSR Mode S reports containing meteorological information) and relevant automated dissemination procedures; and
  - 2) if applicable, designation procedures for air-reporting on air routes with high-density traffic;
- taking into consideration the relevant provisions in Annex 3, Chapter 5 and Appendix 4, described in 4.2 of this manual;

*Note.— Doc 7030 should be also consulted for the procedures regarding air-reporting.*

- d) where necessary, arrangements regarding the dissemination of information received and/or obtained on pre-eruption volcanic activity, volcanic eruptions and volcanic ash cloud, with special emphasis given to information/notifications of these events from non-aeronautical sources and, in the case of FIRs and control areas having active or potentially active volcanoes, to the arrangements for information from the State vulcanological agency;

*Note.— Further guidance is provided in the Handbook on the International Airways Volcano Watch (IAVW) — Operational Procedures and Contact List (Doc 9766) and the Manual on Volcanic Ash, Radioactive Material and Toxic Chemical Clouds (Doc 9691). These documents also apply to e) below.*

- e) arrangements between the ATS and meteorological authorities regarding the dissemination of information on the release into the atmosphere of radioactive materials and toxic chemicals;
- f) arrangements for the periodic familiarization of ATS, search and rescue, and meteorological personnel with each other's facilities, functions and procedures;
- g) where necessary, arrangements for meteorological training of ATS personnel; and
- h) arrangements for the provision of aeronautical climatological information to support ATS activities, e.g. development of ATS procedures.

5.1.6 Details concerning 5.1.5 b) to e) should be discussed, in terms of individual aerodromes or the ATS units and the aerodrome meteorological offices not located at aerodromes, by representatives of the ATS units and the aerodrome meteorological offices concerned. Separate agreements should be drawn up as annexes to the overall Letter of Agreement (5.1.3 and 5.1.5 refer).

5.1.7 The following items should be covered by these agreements, i.e. annexes to the Letter of Agreement:

- a) the information to be supplied routinely by meteorological offices and stations to ATS units, including the format and frequency of the information;
- b) the information to be supplied non-routinely by meteorological offices and stations to ATS units (e.g. local special reports, SPECI, SIGMET and AIRMET information, and aerodrome and wind shear warnings and alerts), including criteria and local arrangements for the preparation of local special reports, and aerodrome and wind shear warnings and alerts;
- c) the transmission of meteorological information in the form of digital data, including WAFS digital grid point data from MET to ATS computers (and vice versa) specifying the sources, formats and volume of the data, transmission protocols, interfaces, etc.;
- d) the provision in ATS units of displays related to integrated automatic systems and the circumstances under which certain meteorological information need not be supplied by the meteorological offices or stations to ATS units (i.e. when the information is independently available at ATS units);
- e) instruments/displays connected to the same sensors (e.g. of automatic meteorological observing stations, and RVR systems at ATS units), their use, calibration and maintenance;
- f) the making of supplementary (visual) observations by ATS personnel in accordance with the provisions of Annex 3, 4.2 d) (discussed in 4.1.1 and 4.1.2 of this manual) and their supply to meteorological offices and stations;
- g) meteorological information obtained in ATS units from aircraft taking off, landing and en route, via voice communications (i.e. special air-reports and non routine aircraft observations), and relayed to aerodrome meteorological offices, aeronautical meteorological stations and MWOs;

*Note.— Similar arrangements regarding the automatic dissemination of air-reports by data link are dealt with in the agreement between the ATS and MET authorities (5.1.5 c) 1) refers).*

- h) provision and use of meteorological information obtained from ground weather radar or from radar used by ATS (if applicable) and from meteorological satellites;
- i) dissemination of information obtained on pre-eruption volcanic activity, volcanic eruptions and volcanic ash cloud, including volcanic ash advisories;
- j) dissemination of tropical cyclone advisories;
- k) dissemination and use of information concerning the release into the atmosphere of radioactive materials and toxic chemicals;
- l) means to be used for the supply, exchange and dissemination of information under a) and b) and f) to k); and

- m) detailed allocation of responsibilities to designated associated meteorological offices and stations for the supply of information to the ATS units concerned.

5.1.8 Experience has also shown that the development of additional national guidance material on the coordination between air traffic and meteorological services can help to keep all concerned currently informed of the various procedures and their application.

5.1.9 A sample Letter of Agreement between an ATS authority and a meteorological authority is given in Appendix 2.

## **5.2 COORDINATION BETWEEN TWRs AND APPs AND THEIR ASSOCIATED METEOROLOGICAL OFFICES AND STATIONS**

5.2.1 The aerodrome meteorological office(s) and aeronautical meteorological station(s) associated with a TWR or an APP are responsible for the supply of required meteorological information to these ATS units. The ATS units are responsible for determining what meteorological information is to be transmitted to an aircraft, when and by what means.

5.2.2 To meet the needs of arriving and departing aircraft, the information given in Chapter 3, 3.2 and, in particular, in 3.2.1 is to be supplied to TWRs and APPs. If available, weather radar information is also required, particularly when towering cumulus, cumulonimbus and thunderstorms are frequent.

5.2.3 Coordination between the ATS units and the aerodrome meteorological offices and aeronautical meteorological stations concerned should take into account the type of air traffic, as well as the availability and use of duplicate meteorological-observing instruments and displays of automated meteorological observing stations in these units. Also, agreement should be reached on:

- a) the use by ATS personnel of the information obtained from such instruments and displays;
- b) the reporting of meteorological phenomena of operational significance, if observed by ATS personnel;
- c) the use of reports of non-routine aircraft observations (e.g. on turbulence or wind shear; 4.2.19 refers) received from aircraft landing or taking off; and
- d) the calibration and maintenance of the meteorological instruments and displays used at these ATS units.

5.2.4 The meteorological reports required from the relevant aerodrome meteorological office or aeronautical meteorological station should be supplied promptly. This requires at least a direct telephone line and a direct teleprinter. At many aerodromes use is made of more rapid and automatic means of supplying the information, such as local aeronautical computer systems and local area networks. Depending on the size of the aerodrome, the volume of air traffic and the technical means available, much of the information can also be supplied by the use of surface wind, visibility, RVR, cloud base, air temperature, dew-point temperature and atmospheric pressure displays in the ATS units. At aerodromes where traffic levels are high or where there are precision approach operations, use is made of automatic observing stations or integrated automatic information systems that display, in real time, measured meteorological elements as well as manually inserted meteorological elements which cannot be observed by automatic means. Transmitting local reports from the meteorological station by switchboard telephone often proves to be unsatisfactory and even direct telephone lines involve time consuming copying of messages and the risk of errors. Special arrangements should be made to ensure the prompt transmission of available weather radar and, if agreed, meteorological satellite information to controller positions, preferably in a format already processed and interpreted, e.g. in chart form. Such information can be displayed at the ATS units separately or on the ATS display at controller positions.

5.2.5 In cases where an air traffic control unit operates a primary radar but the associated aerodrome meteorological office does not operate a weather radar, consideration should be given to installing a monitor display in the aerodrome meteorological office which, preferably, taps the radar signals direct from the antenna prior to their subsequent modification for use in radar control (e.g. modification by moving target indicator circuits). When an independent weather radar in the aerodrome meteorological office or a parallel monitor with the air traffic control radar in the aerodrome meteorological office is unserviceable, arrangements should be made for the aerodrome meteorological office to be informed when significant weather echoes are observed on air traffic control radar so that a meteorologist can access this information.

5.2.6 Even the fastest method of transmitting meteorological information to the ATS units may at times be too slow to permit this information to be kept up to date during rapidly changing weather situations. For these and other reasons (such as the fact that controllers have an unobstructed view of the aerodrome from the control tower), it is essential that appropriate ATS units, in particular TWRs, be able and authorized to carry out the supplementary observing and reporting of meteorological phenomena of operational significance, such as a sudden deterioration in visibility due to the onset of precipitation. The occurrence of low level wind shear and other significant meteorological phenomena reported by aircraft taking off and landing should also be closely followed by ATS personnel. In addition to transmitting this information immediately to aircraft likely to be affected by it, the ATS unit should also transmit it as soon as possible to its associated aerodrome meteorological office(s) and aeronautical meteorological station(s).

5.2.7 It has already been mentioned that instrument displays for surface wind are required to be available in the appropriate ATS units (Annex 3, Appendix 3, 4.1.2.1). As regards RVR and pressure values, Annex 3, Appendix 3, 4.3.3.1 and Annex 3, Appendix 3, 4.7.1 specify that when these elements are determined by instrumental means, displays are required to be located in the appropriate ATS units. Displays of visibility, height of cloud base, and air temperature and dew-point temperature (Annex 3, Appendix 3, 4.2.2, 4.5.2 and 4.6.1) are also desirable.

5.2.8 Where more than one sensor is used to obtain representative observations of an element (e.g. in the case of multiple-instrument RVR, visibility or anemometer systems), displays deriving data from these sensors, appropriately labelled to identify the sensors to which they relate, should be located in the appropriate ATS unit. The same applies to the information on the remote displays of automatic meteorological observing stations. In addition, the information on controller displays derived from automatic meteorological observing stations should be the full information available as displayed in the local meteorological station or an agreed subset thereof.

5.2.9 The surface wind display at the local ATS unit must show wind direction in degrees magnetic and the mean wind speed and direction averaged over two minutes as well as the wind speed variations indicated during the previous ten minutes. For wind observations reported by the aeronautical meteorological station at the aerodrome, it should be noted that the wind direction is given in degrees true and must therefore be converted at the ATS unit into degrees magnetic before transmission to departing and arriving aircraft. In METAR and SPECI, including those for VOLMET broadcast, the surface wind observations are averaged over ten minutes, except when the ten minute period includes a marked discontinuity in the wind direction and/or speed.

*Note.— For details concerning surface wind reporting, see Annex 3, Chapter 4, 4.6.1 and Appendix 3, 4.1.*

5.2.10 At many aerodromes, meteorological information for aircraft approaching and landing is transmitted, together with operational data, by means of D-ATIS or ATIS broadcasts. The specifications for such services are contained in Annex 11, 4.3.4 to 4.3.9. Agreements between the local meteorological stations and the ATS units should, in those cases, deal also with the provision of the meteorological information required for these services and the methods of keeping it up to date. In the case of ATIS, information from the local meteorological report is used; hence, the surface wind observations contained in these broadcasts are averaged over two minutes. The surface wind direction values broadcast through ATIS should be given in degrees magnetic.

### 5.3 COORDINATION BETWEEN ACCs/FICs AND THE ASSOCIATED MWOs

5.3.1 The meteorological information required by ACCs/FICs from the associated MWOs normally comprises the information given in Chapter 3, 3.4 and, in particular, 3.4.1. Where available, weather radar or composite weather radar and, if agreed, meteorological satellite information should also be supplied to ACCs/FICs.

5.3.2 Reliable telecommunications facilities between ACCs/FICs and the associated MWOs are essential. The facilities required comprise a direct telephone line and printed and/or video display communications. Depending on the volume of traffic, the needs of the ACCs/FICs concerned and the technical means available, meteorological information can also be supplied to the ACCs/FICs through:

- a) exchanges between national ATS and meteorological computerized information systems, including national OPMET data banks;
- b) local aeronautical computer systems using local area networks;
- c) facsimile transmission; or
- d) direct access through AFTN to international OPMET data exchange systems, or international OPMET data banks.

Weather radar and meteorological satellite information is relayed, as necessary, to ACCs/FICs as outlined in 5.2.4 and 5.2.5.

5.3.3 Difficulties sometimes arise when an aircraft requests non-routine information, e.g. concerning a distant aerodrome. The MWO concerned should be on the alert for such non-routine requests and take action with the aerodrome meteorological office concerned as necessary to provide a timely reply.

5.3.4 Proper coordination between ACCs/FICs and the associated MWOs should also include clearly stated and agreed procedures for the handling of air-reports.

*Note.— Actions by ATS units, including ACCs/FICs and MWOs, concerning the handling of all types of air-reports are described in Chapter 4, 4.2.*

5.3.5 Close coordination is also required between the associated MWOs and ACCs/FICs and the AIS units concerned to ensure that information on volcanic ash provided in SIGMET and ASHTAM/NOTAM is consistent. In particular, information received from vulcanological agencies should be exchanged without delay between the MWOs, ACCs/FICs and AIS units.

5.3.6 If the MWOs associated with the ACCs/FICs concerned are required to be involved in the exchange/dissemination of information concerning a release into the atmosphere of radioactive materials or toxic chemicals following a nuclear or chemical accident, the necessary coordination measures should be developed to cover these emergencies.

5.3.7 It is not uncommon to assign meteorologists to work in ATS units handling large numbers of aircraft movements or to be available at certain meteorological centres as coordinators for such ATS units (e.g. ACCs, FICs and ATFMcs) and the associated MWOs. These meteorologists have immediate access to up-to-date meteorological information in the area for which the ATS unit is responsible, particularly weather radar data, satellite data, actual and forecast meteorological charts and all relevant air-reports. This information enables them to provide instantaneous advice and warnings to controllers, permitting the latter to make maximum use of meteorological data in controlling/informing aircraft or assisting in traffic flow management, with the minimum of distraction from their tasks.



*Note.— In order to illustrate methods used by States for the effective provision of meteorological information to ATS units, material received from two States is reproduced in Appendices 4 and 5 to this manual. It should be noted that this material is not necessarily suitable for application in all States, and procedures will need to be used in individual States corresponding to the conditions prevailing in that State. In addition, the terminology and abbreviations contained therein may not precisely conform to those prescribed by ICAO.*

---



## Chapter 6

# COORDINATION BETWEEN AERONAUTICAL INFORMATION SERVICES AND AERONAUTICAL METEOROLOGICAL SERVICES

6.1 General information on the meteorological service provided to aeronautical users in a State, including the ATS authorities and their operational units, is promulgated through the aeronautical information services (AIS). Changes in the provision of the service, changes in meteorological procedures and even new information concerning the impact of significant weather on flight operations are notified to aeronautical users through the AIS. The requirement for relevant notifications to be made to the AIS by the meteorological authority is given in Annex 3, Chapter 10, 10.3 and Appendix 9, 3.1. Also, certain information (e.g. concerning the occurrence of volcanic activity hazardous to flight operations or the release of radioactive materials into the atmosphere) is obtained and disseminated to the users concerned and to aircraft in flight through the coordinated efforts of the aerodrome meteorological offices, meteorological watch offices and aeronautical meteorological stations, ATS and AIS units.

6.2 It is recommended in Annex 3, Chapter 9, 9.4.2 that automated pre-flight information systems providing self-briefing using harmonized, common point of access to meteorological and AIS information by operators, flight crew members and other aeronautical personnel concerned be established as agreed between the meteorological authority and the civil aviation authority or the agency to which the authority to provide service has been delegated in accordance with Annex 15, Chapter 2, 2.1.1 c). Implementation of the provisions and day-to-day operation of relevant facilities for the harmonized access to meteorological and AIS information will also require coordination between the meteorological and AIS authorities and their personnel, although quality assurance and quality management of the meteorological information would be the responsibility of the meteorological authority concerned.

6.3 In view of the above and in order to supplement the guidance regarding coordination between ATS units and meteorological offices and stations provided in Chapters 3 to 5 and Appendix 2 of this manual, the following outlines the extent of the coordination required between the AIS and meteorological authorities in each State.

6.4 It should be noted that continuous liaison should be maintained between the meteorological authority and AIS offices and units in each State. As a result of such liaison, the meteorological authority submits direct to the AIS authority, or through its aerodrome meteorological offices, MWOs and/or aeronautical meteorological stations, certain information to be included in the integrated aeronautical information package (IAIP) of the State concerned. That package includes, in particular:

- a) the Aeronautical Information Publication (AIP), including the amendment service;
- b) supplements to the AIP;
- c) NOTAM and pre-flight information bulletins (PIBs);
- d) aeronautical information circulars (AICs); and
- e) checklists and summaries.

6.5 AIPs are issued by States in accordance with Annex 15 — *Aeronautical Information Services and the Procedures for Air Navigation Services — Aeronautical Information Management* (PANS-AIM, Doc 10066), Appendix 2. These AIPs contain current information on aerodromes, communication facilities, navigation aids, meteorological services, ATS and other essential air navigation services. The information contained in AIPs is of a permanent nature, i.e. not expected to change frequently or at short notice, and is kept up to date by an amendment service. Information on sudden or temporary changes is promulgated in the form of NOTAM or AIP Supplements depending on the nature and urgency. Changes to facilities, services or procedures which can be foreseen well in advance and which require corresponding changes in airline manuals, etc., are issued on predetermined dates each month under the aeronautical information regulation and control (AIRAC) system. In addition to the foregoing, long-term changes to procedures or facilities, providing information such as the effect of certain meteorological phenomena on aircraft operations, are issued as AICs.

6.6 In order to assist users, who are mainly operators and flight crew members, to obtain the necessary information from AIPs quickly and without risk of misunderstanding, AIPs must be constructed uniformly and according to the pattern prescribed by ICAO. The information contained in the AIP must be accurate and up to date and follow the prescribed layout and order.

6.7 The AIS authority designated by the State concerned to collect information for the preparation of relevant elements of the IAIP, the international NOTAM office and the aerodrome aeronautical information service units should be supplied with the necessary information, as agreed between the meteorological and AIS authorities concerned.

6.8 The following information relating to the aeronautical meteorological service is required to be supplied to the AIS authority and its offices and units concerned:

- a) information on the meteorological authority and meteorological service and facilities provided to international air navigation for inclusion in the AIP;

*Note 1.— Details of this information are given in the PANS-AIM, Appendix 2, Part 1, GEN 3.5 and Part 3, AD 2.3, AD 2.11, AD 3.3 and AD 3.11 and in the Aeronautical Information Services Manual (Doc 8126), Chapter 5 and related Appendix.*

*Note 2.— Information on the meteorological authorities and meteorological service for international air navigation to be included in a State's AIP is given in Appendix 3.*

- b) information concerning the establishment, withdrawal and significant changes in operation of the aeronautical meteorological service and facilities. This information is required to be submitted to the AIS authority concerned sufficiently in advance of the effective date so that the respective information can be issued in compliance with Annex 15, 6.3.2.2, 6.3.2.3 b) and 6.2.1 e);

*Note.— In some States input may be required from the meteorological authority, its aerodrome meteorological offices, MWOs and/or aeronautical meteorological stations for the preparation of NOTAM concerning a release into the atmosphere of radioactive materials or toxic chemicals following a nuclear or chemical incident (Annex 15, 6.3.2.2 and 6.3.2.3 x) refer) or for the preparation of SNOWTAM, i.e. a special series of NOTAM notifying the presence or removal of hazardous conditions due to snow, ice, slush or standing water on the movement area of aerodromes (Annex 15, 6.3.2.2 and 6.3.2.3 t) refer).*

- c) information for the preparation of NOTAM or ASHTAM concerning an operationally significant change of volcanic activity, the location, date and time of volcanic eruptions and/or horizontal and vertical extent of volcanic ash cloud, including direction of movement, flight levels and routes or portions of routes which could be affected (Annex 15, 6.3.2.2 and 6.3.2.3 w) refer);

*Note 1.— An ASHTAM is a special series NOTAM notifying, by means of a specific format, changes in activity of a volcano, a volcanic ash eruption and/or volcanic ash cloud that is of significance to aircraft operations. Details of the ASHTAM format are given in the PANS-AIM (Doc 10066), Appendix 5.*

*Note 2.— The Manual on Volcanic Ash, Radioactive Material and Toxic Chemical Clouds (Doc 9691) also refers to the NOTAM/ASHTAM mentioned in b) and c).*

*Note 3.— Close coordination is required between the MWO, ACCs/FICs and AIS units to ensure that information on volcanic ash provided in SIGMET and ASHTAM/NOTAM is consistent. In particular, information received from national vulcanological agencies (e.g. using the volcanic activity colour code in the PANS-AIM, Appendix 5, 3.5) should be exchanged between the MWO, ACCs/FICs and AIS units.*

- d) information for the preparation of NOTAM concerning observations or forecasts of space weather phenomena, the date and time of their occurrence, the flight levels where provided, and portions of the airspace which may be affected by the phenomena (Annex 15, 6.3.2.3 v) refers); and
- e) information necessary for the development of an AIC, in compliance with Annex 15, 5.2.4.1, regarding expected long-term major changes in legislation, regulations, procedures or facilities relating to the provision of meteorological service to international air navigation. This may also include information on the effect of certain weather phenomena on aircraft operations (for example, local wind shear conditions).

*Note.— Information which qualifies for promulgation in an AIP or a NOTAM or ASHTAM should not be promulgated in an AIC.*

6.9 The AIRAC system should be used for distributing to users information concerning anticipated changes to facilities, services and procedures in accordance with a predetermined schedule of effective dates (Annex 15, 6.2 refers). The premeditated significant changes (e.g. establishment, withdrawal and operational trials) to meteorological facilities and procedures are to be notified by AIRAC.

6.10 Plain-language text and abbreviated plain-language message format should be used for information supplied by the meteorological authority, its aerodrome meteorological offices, MWOs and/or aeronautical meteorological stations to the AIS authority and its offices and units concerned. In the case of a request for the issuance of an ASHTAM or NOTAM in accordance with 6.8 c), the relevant information will be sent in plain-language text or in abbreviated plain-language message format to the international NOTAM office and/or ACC concerned.

6.11 Suitable modes and channels of communication to be used for the submission of information to AIS offices and units should be agreed between the meteorological authority and the AIS offices and units concerned, including messenger service, postal service, aeronautical fixed service, telefax, computer networks and electronic mail. The telephone is to be used only in an emergency and the information so provided must be confirmed in written form.



## Chapter 7

# METEOROLOGICAL SUPPORT TO THE ATM SYSTEM

### 7.1 INTRODUCTION

The development of new technologies to be applied to both the ATS system and aircraft will facilitate a substantial improvement to, and extension of, the ATS currently provided to aircraft operators. This process will require additional meteorological support to ATS and affect the coordination between the ATS and meteorological authorities and their respective operational units. Although the progress that has been made in planning for the ATM system does not yet provide for a detailed analysis and guidance regarding the coordination between individual elements and units of the ATM system and the aerodrome meteorological offices, MWOs and aeronautical meteorological stations, the following material is intended to describe trends in the provision of meteorological service to international air navigation, including ATS, and in the context of these trends, to outline the envisaged meteorological support to the ATM system. The material related to the ATM operational concept is based on the *Global Air Traffic Management Operational Concept* (Doc 9854) and that related to the global air navigation plan in the *Global Air Navigation Plan* (Doc 9750).

### 7.2 OVERVIEW OF THE MET INFORMATION REQUIRED UNDER THE ATM OPERATIONAL CONCEPT

7.2.1 The global ATM operational concept presents the ICAO vision of an integrated, harmonized and globally interoperable ATM system. The purpose of the ATM operational concept is to achieve an interoperable global ATM system, for all users during all phases of flight, that meets agreed levels of safety, provides for optimum economic operations, is environmentally sustainable and meets national security requirements. The ATM operational concept describes the services that will be required to operate the global air traffic system up to and beyond 2025. The operational concept addresses what is needed to increase user flexibility and maximize operating efficiencies in order to increase system capacity and improve safety levels in the future ATM.

7.2.2 The ATM operational concept defines seven interdependent concept components that will be integrated to form the future ATM system. They comprise:

- airspace organization and management (AOM)
- aerodrome operations (AO)
- demand and capacity balancing (DCB)
- traffic synchronization (TS)
- conflict management (CM)
- airspace user operations (AUO); and
- ATM service delivery management (ATMSDM).

The order of these components implies no priority. The management, utilization and transmission of data and information are vital to the proper functioning of these components.

7.2.3 The provision of meteorological information will be an integrated function of the ATM system. The information will be tailored to meet ATM requirements in terms of content, format and timeliness.

7.2.4 The main benefits of meteorological information for the ATM system will be related to the following:

- a) the improved accuracy and timeliness of meteorological information will be used to optimize flight trajectory planning and prediction, thus improving the safety and efficiency of the ATM system;
- b) the increased availability of shared meteorological information on board the aircraft will allow the preferred trajectory to be refined in real time;
- c) better identification, prediction and presentation of adverse weather will allow the management of its effects more efficiently, thereby improving safety and flexibility, for example, by providing accurate and timely information on the need for diversion or re-routing;
- d) improved aerodrome reports and forecasts will facilitate the optimum use of available aerodrome capacity;
- e) increased availability of meteorological information (air-reports) from on-board meteorological sensors will contribute to improving forecast meteorological information and the display of real-time information; and
- f) meteorological information will contribute to minimizing the environmental impact of air traffic.

Performance management will be an important part of the quality assurance of meteorological information.

### **7.3 METEOROLOGICAL SUPPORT TO INTERNATIONAL AIR NAVIGATION IN ACCORDANCE WITH THE GLOBAL PLAN**

7.3.1 While the ATM operational concept presents a long-term future vision, the Global Plan describes a strategy aimed at achieving near- and medium-term ATM benefits on the basis of available and foreseen aircraft capabilities and ATM infrastructure. It contains guidance on ATM improvements necessary to support a uniform transition to the ATM system envisioned in the *Global Air Traffic Management Operational Concept* (Doc 9854). The planning focuses on specific performance objectives, supported by a set of "Global Plan Initiatives" which are designed to support the planning and implementation of performance objectives in the regions. Planning and implementation of performance objectives should be started in the near term and progress in an evolutionary manner.

7.3.2 The objective of the Global Plan Initiative related to aeronautical meteorology is to improve the availability of meteorological information in support of a seamless global ATM system. It is related to the following operational concept components: AOM, DCB, AO and AUO (7.2.2 refers). The strategy described in the Global Plan requires that the following developments be completed and implemented during the next few years:



- 
- a) Immediate access to real-time, global OPMET information is required to assist ATM in tactical decision-making for aircraft surveillance, ATFM and flexible/dynamic aircraft routing, which will contribute to the optimization of the use of airspace. Such stringent requirements will imply that most meteorological systems be automated and that meteorological service for international air navigation be provided in an integrated and comprehensive manner through global systems such as the WAFS, the IAVW and the international tropical cyclone watch (ITCW);
  - b) Enhancements to WAFS, IAVW and Tropical Cyclone Watch to improve the accuracy, timeliness and usefulness of the forecasts issued will be required to facilitate the optimization of the use of airspace; and
  - c) Increasing use of data link to downlink and uplink meteorological information (through such systems as D-ATIS and D-VOLMET) will assist in the automatic sequencing of aircraft on approach and will contribute to the maximization of capacity. The development of automated ground-based meteorological systems in support of operations in the terminal area will provide OPMET information (such as automated low-level wind shear alerts) and automated runway wake vortex reports. OPMET information from the automated systems also assists in the timely provision of forecasts and warnings of hazardous weather phenomena. These forecasts and warnings, together with automated OPMET information, contribute to maximizing runway capacity.
-



## Appendix 1

# STANDARD RADIOTELEPHONY PHRASEOLOGIES TO BE USED IN VOLMET BROADCASTS

### 1. INTRODUCTION

1.1 VHF and/or HF VOLMET broadcasts, established by regional air navigation agreement, are widely used in various regions to provide, in an efficient manner, meteorological advice of concern to aircraft en route.

1.2 As determined by relevant regional air navigation agreement, VHF and HF VOLMET broadcasts may contain current aerodrome meteorological reports, i.e. METAR, SPECI and trend forecasts, where available. Furthermore, if determined by regional air navigation agreement,

- a) HF VOLMET broadcasts may also contain TAF; and
- b) VHF and HF VOLMET broadcasts may also contain SIGMENT information.

*Note 1.— Only one TAF can be valid at an aerodrome at any given time. In most ICAO regions all TAF issued have a validity period of 24 or 30 hours. The inclusion of such TAF in the scheduled HF VOLMET broadcasts may not be practicable in view of the length of TAF. In order to address this issue, the aerodrome meteorological office concerned may issue an aerodrome forecast for VOLMET with a shorter period of validity by extracting the information pertaining to the first 9 to 12 hours from the 24- or 30-hour TAF.*

*The following principles should be applied to the aerodrome forecast extracted from the 24- or 30-hour TAF:*

- a) *its period of validity is to be determined by local agreement with the operators concerned;*
- b) *it must not be exchanged/disseminated internationally, nor should it be distributed through the AFS Internet-based services (i.e. Secure Aviation Data Information Service (SADIS), FTP or the WAFS Internet File Service (WIFS));*
- c) *it will be issued simultaneously with the TAF that it is extracted from; and*
- d) *TEMPO groups included in the original 24- or 30-hour TAF are to be truncated at the end of the validity period while BECMG groups crossing the end of the validity period are to be included in full. (The inclusion of the BECMG group in full may extend, on some occasions, the period of validity of the extracted aerodrome forecast by 3 hours.)*

*Note 2.— Where D-VOLMET is used, the inclusion of 24- or 30-hour TAF therein will not pose any problems.*

1.3 The aerodromes for which METAR, SPECI and trend forecasts as well as TAF and SIGMET are broadcast are also determined by regional air navigation agreements. The same applies to the sequence in which individual messages should be broadcast.

1.4 It should be noted that the provisions concerning radiotelephony given in Annex 10 — *Aeronautical Telecommunications*, Volume II — *Communications Procedures including those with PANS status*, Chapter 5, and relevant guidance contained in the *Manual of Radiotelephony* (Doc 9432) apply, among others, to the transmission of information on meteorological conditions by radiotelephony, i.e. also to VOLMET broadcasts. The phraseologies to be used by ATS personnel and other ground personnel in transmitting information on meteorological conditions, in particular from the content of local routine reports and local special reports, are given in the *Procedures for Air Navigation Services — Air Traffic Management* (PANS-ATM, Doc 4444), Chapter 12.

1.5 As a consequence of the introduction of the new generation of aeronautical meteorological codes (METAR, SPECI and TAF codes refer) in Amendment 69 to Annex 3 (1993), a need was identified in the European (EUR) Region for a study regarding the phraseology for voice communication of meteorological conditions (European Air Navigation Planning Group (EANPG) Decision 36/16 refers). In view of this and the global rather than the regional character of the matter, the guidance material presented below was developed for implementation in all regions. The material takes account of the work accomplished in this area in the EUR Region.

1.6 Although the guidance material primarily focuses on VOLMET broadcasts, the meteorological phraseology contained therein should also be used by ATS personnel in transmitting information on meteorological conditions from METAR, SPECI, trend forecast, TAF and SIGMET to aircraft en route. In view of the many similarities between METAR and SPECI and local routine reports and local special reports (issued in abbreviated plain language), the guidance material may also be applied, with minor exceptions and taking full account of the phraseologies given in the PANS-ATM, Chapter 12, to the transmission of meteorological information contained in local weather reports, e.g. in ATIS broadcasts.

1.7 The phraseologies presented in the guidance material were derived, with a few exceptions, from the decode/encode of relevant abbreviations given in the *Procedures for Air Navigation Services — ICAO Abbreviations and Codes* (PANS-ABC, Doc 8400).

1.8 **Details of the input data** from METAR and SPECI, including trend forecasts as well as TAF, are contained in Annex 3, Appendix 3, Table A3-2 and Appendix 5, Table A5-1. They fully reflect relevant operational requirements. Details concerning the input data from SIGMET presented in section 4 below comply with Annex 3, Appendix 6, Table A6-1A.

1.9 **The standard meteorological phraseologies** recommended in the guidance material are presented in two columns. The left-hand column gives details and appropriate examples concerning the coding of individual groups in METAR, SPECI, trend forecast and TAF, as well as the abbreviated plain language used in SIGMET. The right-hand column gives the phraseology for the examples in the left-hand column.

1.10 Words in parentheses indicate that specific information such as time, name of aerodrome, or values or details pertaining to wind, visibility, runway visual range, present weather, etc., have to be inserted to complete the phrase. Words in square brackets indicate optional words or information that may be necessary in specific circumstances.

1.11 Annex 10, Volume II, 5.2.1.4.1.1 is relevant to the transmission of numbers in radiotelephony. It stipulates that all numbers, except as prescribed in 5.2.1.4.1.2 of the Annex, be transmitted by pronouncing each digit separately. Paragraph 5.2.1.4.1.2 of the Annex is reproduced below:

“5.2.1.4.1.2 All numbers used in the transmission of altitude, cloud height, visibility and runway visual range (RVR) information, which contain whole hundreds and whole thousands, shall be transmitted by pronouncing each digit in the number of hundreds or thousands followed by the word HUNDRED or THOUSAND as appropriate. Combinations of thousands and whole hundreds shall be transmitted by pronouncing each digit in the number of thousands followed by the word THOUSAND followed by the number of hundreds followed by the word HUNDRED.”

The following examples illustrate the application of this procedure (see 5.2.1.4.3.1 of Annex 10, Volume II, for pronunciation).

<i>altitude</i>	<i>transmitted as</i>
800	<b>eight hundred</b>
3 400	<b>three thousand four hundred</b>
12 000	<b>one two thousand</b>
<i>cloud height</i>	<i>transmitted as</i>
2 200	<b>two thousand two hundred</b>
4 300	<b>four thousand three hundred</b>
<i>visibility</i>	<i>transmitted as</i>
1 000	visibility <b>one thousand</b>
700	visibility <b>seven hundred</b>
<i>runway visual range</i>	<i>transmitted as</i>
600	RVR <b>six hundred</b>
1 700	RVR <b>one thousand seven hundred</b>

1.12 **Time.** Annex 3 provisions stipulate that coordinated universal time (UTC) shall be used in METAR, SPECI, trend forecast, TAF and SIGMET. The procedure for transmitting time in radiotelephony is given in Annex 10, Volume II, 5.2.1.4.1.4. It stems from the procedure that time, in hours and minutes, should be transmitted by pronouncing each digit separately (e.g. 0735 UTC should be pronounced as ZERO SEVEN THREE FIVE). It may be noted that in some of the meteorological messages referred to above, time may be given only in hours. In such cases, time should be converted for transmission in VOLMET broadcasts in the format given above by adding “ZERO ZERO” for minutes to the hours indicated in the message (e.g. time indicated in a message as 14Z or 14 should be transmitted as ONE FOUR ZERO ZERO).

1.13 The same Annex 10, Volume II procedure does not address using the UTC indicator together with time. It may be argued that there is no need to use the indicator in phraseologies related to METAR, SPECI and trend forecast. However, in order to avoid confusion and to facilitate reading the messages broadcast by flight crew members, in some circumstances the use of the UTC indicator cannot be avoided. This may concern the transmission of certain complex groups of data, e.g. in TAF and, in particular, in SIGMET for tropical cyclones and volcanic ash cloud. In such cases, UTC in square brackets may appear in phraseology, and individual letters of the indicator should be pronounced in non-phonetic form. Finally, it is important to emphasize that the application of this practice in VOLMET broadcasts should be kept to a minimum.

1.14 **The use of language** in air-ground radiotelephony communications is dealt with in Annex 10, Volume II, 5.2.1.2. In respect of the VOLMET broadcast, unless the language to be used for a broadcast is determined by relevant regional air navigation agreement, the provisions of Annex 10, 5.2.1.2, should be applied.

## 2. METAR, SPECI AND TREND FORECASTS

*Note 1.— METAR and SPECI are issued for dissemination and use beyond the aerodrome of origin, e.g. for the transmission of relevant information on meteorological conditions to aircraft en route and also for use in VOLMET broadcasts.*

*Note 2.— In accordance with regional air navigation agreement relating to meteorological forecasts and VOLMET broadcasts, a trend forecast may be attached to individual METAR and/or SPECI. A trend forecast is issued as a concise statement of the expected trend of the meteorological conditions in the course of two hours from the time of the report, i.e. the time of observation indicated in the report, which forms a part of the trend forecast. In view of this, a trend forecast should be transmitted as an integral part of the METAR or SPECI concerned.*

*Note 3.— Individual METAR in VHF VOLMET broadcasts should not be introduced by the code name METAR. This, however, does not apply to the METAR broadcast in HF VOLMET where each METAR should be introduced by the phrase METAR<sup>1</sup>. Each SPECI broadcast, both in VHF and HF VOLMET broadcasts, should be introduced by the phrase SPECI<sup>1</sup>.*

*Note 4.— When a required METAR is not available for the relevant VOLMET transmission, the latest available message should be included in the transmission. The phrase NIL REPORT should be used when the required message is not available for VOLMET transmissions for a longer time period (e.g. of two hours or more).*

*Note 5.— If a METAR or SPECI contains substantial errors in its content and/or form, the phrase NIL REPORT should replace the message.*

---

1. To be pronounced as a spoken word.

Input data from METAR or SPECI	Phraseologies
<p><b>1. Aerodrome</b> CCCC</p>	<p><b>1. Aerodrome</b> (name)</p> <p><i>Note.— The name of the aerodrome should be as indicated in the relevant VOLMET broadcast table of the regional air navigation plan concerned. AOP Table, column 1 of the same publication includes names of aerodromes together with relevant location indicators CCCC.</i></p>
<p>Example: YUDO* *Fictitious location</p>	<p>Example: DONLON*</p>
<p><b>2. Time of observation</b> YYGGggZ</p>	<p><b>2. Time of observation</b> (hours minutes)</p> <p><i>Note.— Each METAR and SPECI to be broadcast should include the time of observation. The day of the month (YY) should not be broadcast.</i></p>
<p>Example: 261530Z</p>	<p>Example: ONE FIVE THREE ZERO</p>
<p><b>3. Automatic observation indicator and missing report indicator</b> AUTO or NIL</p>	<p><b>3. Automatic observation indicator and missing report indicator</b> AUTOMATIC or NIL REPORT</p>
<p>Example: AUTO NIL</p>	<p>Example: AUTOMATIC NIL REPORT</p>
<p><b>4. Surface wind</b> dddffGf<sub>m</sub>f<sub>m</sub>KT or MPS d<sub>n</sub>d<sub>n</sub>d<sub>n</sub>Vd<sub>x</sub>d<sub>x</sub>d<sub>x</sub></p> <p><i>Note.— The maximum surface wind speed values to be reported for ff and f<sub>m</sub>f<sub>m</sub> are 100 kt or more and 50 mps or more. P99 kt and P49 mps, respectively, indicate these values in both METAR and SPECI.</i></p>	<p><b>4. Surface wind</b></p> <p><i>Note.— Knots (kt) or metres per second (mps) should be used for wind speed in VOLMET transmissions.</i></p>

Input data from METAR or SPECI	Phraseologies
<p><b>4.1 Wind direction, speed</b> dddffKT or MPS</p> <p>Example:</p> <p>01015KT</p> <p>330P49MPS</p>	<p><b>4.1 Wind direction, speed</b> WIND (number) DEGREES (number) (units)</p> <p><i>Note.— The true wind direction values are reported and broadcast in METAR and SPECI.</i></p> <p>Example:</p> <p>WIND ZERO ONE ZERO DEGREES ONE FIVE KNOTS</p> <p>WIND THREE THREE ZERO DEGREES ABOVE FOUR NINE METRES PER SECOND</p>
<p><b>4.2 Wind direction, speed and maximum speed</b> dddffG<sub>f<sub>m</sub></sub> KT or MPS</p> <p>Example:</p> <p>26006G10MPS</p> <p>12050G70KT</p> <p>14075GP99KT</p>	<p><b>4.2 Wind direction, speed and maximum speed</b> WIND (number) DEGREES (number) [units] GUSTING TO (number) (units)</p> <p>Example:</p> <p>WIND TWO SIX ZERO DEGREES ZERO SIX METRES PER SECOND GUSTING TO ONE ZERO METRES PER SECOND</p> <p>WIND ONE TWO ZERO DEGREES FIVE ZERO GUSTING TO SEVEN ZERO KNOTS</p> <p>WIND ONE FOUR ZERO DEGREES SEVEN FIVE GUSTING TO ABOVE NINE NINE KNOTS</p>
<p><b>4.3 Light wind direction variations</b> dddffKT or MPS d<sub>n</sub>d<sub>n</sub>d<sub>n</sub>Vd<sub>x</sub>d<sub>x</sub></p> <p>Example:</p> <p>13007KT 090V170</p>	<p><b>4.3 Light wind direction variations</b> WIND (number) DEGREES (number) (units) VARYING BETWEEN (number) AND (number) DEGREES</p> <p>Example:</p> <p>WIND ONE THREE ZERO DEGREES SEVEN KNOTS VARYING BETWEEN ZERO NINE ZERO AND ONE SEVEN ZERO DEGREES</p>
<p><b>4.4 Variable wind</b> VRBffKT or MPS</p> <p>Example:</p> <p>VRB03KT</p>	<p><b>4.4 Variable wind</b> WIND VARIABLE (number) (units)</p> <p>Example:</p> <p>WIND VARIABLE THREE KNOTS</p>



Input data from METAR or SPECI	Phraseologies
<p><b>4.5 Calm</b> 0000KT or MPS</p>	<p><b>4.5 Calm</b> WIND CALM</p> <p><i>Note.— To be pronounced as spoken words.</i></p>
<p>Example: 0000MPS</p>	<p>Example: WIND CALM</p>
<p><b>5. Visibility</b> VVVV<sub>x</sub>V<sub>x</sub>V<sub>x</sub>V<sub>x</sub>D<sub>v</sub></p> <p><i>Note.— Several States have notified a difference from the relevant provisions of Annex 5 and report visibility in statute miles.</i></p>	<p><b>5. Visibility</b></p>
<p><b>5.1 Visibility, no significant directional variation</b> VVVV</p> <p><i>Note.— Prevailing visibility values are reported in most cases.</i></p>	<p><b>5.1 Visibility, no significant directional variation</b> VISIBILITY (distance) (units)</p> <p><i>Note.— The procedure in 5.2.1.4.1.2 of Annex 10, Volume II, applies to the distance.</i></p>
<p>Examples:</p> <p>0</p> <p>100</p> <p>450</p> <p>4900</p> <p>5000</p> <p>9000</p> <p>9999</p>	<p>Examples:</p> <p>VISIBILITY BELOW FIVE ZERO METRES</p> <p>VISIBILITY ONE HUNDRED METRES</p> <p>VISIBILITY FOUR FIVE ZERO METRES</p> <p>VISIBILITY FOUR THOUSAND NINE HUNDRED METRES</p> <p>VISIBILITY FIVE KILOMETRES</p> <p>VISIBILITY NINE KILOMETRES</p> <p>VISIBILITY ONE ZERO KILOMETRES OR MORE</p>
<p><b>5.2 Visibility, a significant directional variation</b> VVVD<sub>v</sub></p>	<p><b>5.2 Visibility, a significant directional variation</b> MINIMUM VISIBILITY (distance) (units) TO (direction)</p>
<p>Example: 0900NE</p>	<p>Example: MINIMUM VISIBILITY NINE HUNDRED METRES TO NORTHEAST</p>

Input data from METAR or SPECI	Phraseologies
<p><b>6. Runway visual range</b> RD<sub>r</sub>DR/V<sub>r</sub>V<sub>r</sub>V<sub>r</sub>V<sub>r</sub>i</p> <p><i>Note 1.— At aerodromes where RVR observations are required, the inclusion of these data in relevant reports is limited to the periods when either the visibility or RVR for one or more active runways is observed to be less than 1 500 m.</i></p> <p><i>Note 2.— RVR reported is representative of the touchdown zone of the active landing runways.</i></p> <p><i>Note 3.— Several States have notified a difference from the relevant provisions of Annex 5 by indicating that they report RVR in statute miles or feet.</i></p> <p><b>6.1 Runway visual range and tendency</b> RD<sub>r</sub>DR/V<sub>r</sub>V<sub>r</sub>V<sub>r</sub>V<sub>r</sub>i</p>	<p><b>6. Runway visual range</b></p> <p><i>Note 1.— Metres (m) should be used for RVR in VOLMET transmissions.</i></p> <p><i>Note 2.— In the absence of relevant input data in a report, no information on RVR is broadcast.</i></p> <p><b>6.1 Runway visual range and tendency</b> RVR RUNWAY (number) (distance) (units) [tendency]</p> <p><i>Note 1.— RVR should be pronounced using individual letters in non-phonetic form. The RUNWAY VISUAL RANGE phrase may also be used in VOLMET transmissions.</i></p> <p><i>Note 2.— The procedure in 5.2.1.4.1.2 of Annex 10, Volume II, applies to the distance.</i></p>
<p>Examples:</p> <p>R25/0400N</p> <p>R18L/0650U</p> <p>R18C/0800D</p> <p>R18R/M0050</p> <p>R18R/P2000</p> <p>R32/0200</p>	<p>Examples:</p> <p>RVR RUNWAY TWO FIVE FOUR HUNDRED METRES NO DISTINCT TENDENCY</p> <p>RVR RUNWAY ONE EIGHT LEFT SIX FIVE ZERO METRES UPWARD TENDENCY</p> <p>RVR RUNWAY ONE EIGHT CENTRE EIGHT HUNDRED METRES DOWNWARD TENDENCY</p> <p>RVR RUNWAY ONE EIGHT RIGHT BELOW FIVE ZERO METRES</p> <p>RVR RUNWAY ONE EIGHT RIGHT ABOVE TWO THOUSAND METRES</p> <p>RVR RUNWAY THREE TWO TWO HUNDRED METRES</p>

Input data from METAR or SPECI	Phraseologies		
<p><b>6.2 Runway visual range observations for more runways</b></p> <p><i>Note.— Up to a maximum of four groups may be reported in a METAR or SPECI.</i></p>	<p><b>6.2 Runway visual range observations for more runways</b></p> <p><i>Note.— The phraseologies in 6.1 apply to RVR observations relevant to individual, up to four, runways.</i></p>		
<table border="1"> <tr> <td data-bbox="430 451 808 783"> <p>Example:</p> <p>R25R/0150U R25L/0300U</p> </td> <td data-bbox="815 451 1445 783"> <p>Example:</p> <p>RVR RUNWAY TWO FIVE RIGHT ONE FIVE ZERO METRES UPWARD TENDENCY, RVR RUNWAY TWO FIVE LEFT THREE HUNDRED METRES UPWARD TENDENCY, RVR RUNWAY THREE ONE VARYING BETWEEN FIVE HUNDRED AND EIGHT HUNDRED METRES NO DISTINCT TENDENCY</p> </td> </tr> </table>		<p>Example:</p> <p>R25R/0150U R25L/0300U</p>	<p>Example:</p> <p>RVR RUNWAY TWO FIVE RIGHT ONE FIVE ZERO METRES UPWARD TENDENCY, RVR RUNWAY TWO FIVE LEFT THREE HUNDRED METRES UPWARD TENDENCY, RVR RUNWAY THREE ONE VARYING BETWEEN FIVE HUNDRED AND EIGHT HUNDRED METRES NO DISTINCT TENDENCY</p>
<p>Example:</p> <p>R25R/0150U R25L/0300U</p>	<p>Example:</p> <p>RVR RUNWAY TWO FIVE RIGHT ONE FIVE ZERO METRES UPWARD TENDENCY, RVR RUNWAY TWO FIVE LEFT THREE HUNDRED METRES UPWARD TENDENCY, RVR RUNWAY THREE ONE VARYING BETWEEN FIVE HUNDRED AND EIGHT HUNDRED METRES NO DISTINCT TENDENCY</p>		
<p><b>7. Present weather</b> w'w'</p> <p><i>Note.— Table A1-1, Present weather (w'w') decoding and phraseology, applies.</i></p>	<p><b>7. Present weather</b> (detail)</p> <p><i>Note.— Table A1-1, Present weather (w'w') decoding and phraseology, applies to the details.</i></p>		
<p><b>7.1 One group of w'w' includes:</b></p> <p>a) <b>a present weather phenomenon</b> or a combination of present weather phenomena (in terms of various types of precipitation) from column 4 of the table;</p> <p>b) <b>a characteristic of a relevant present weather phenomena</b>, as appropriate, from column 3 of the table; and</p>	<p><b>7.1 The relevant set of the present weather (w'w') includes the following details:</b></p> <p>a) to c) [intensity] [characteristic] (w'w' phenomena)</p> <p><i>Note.— Columns 1, 3 and 4 of Table A1-1 apply to the decode and phraseologies for the intensity, characteristics and w'w' phenomena.</i></p>		

Input data from METAR or SPECI	Phraseologies		
<p>c) <b>an intensity</b>, if appropriate, from column 1 of the table.</p> <table border="1" data-bbox="430 367 1193 1396"> <tr> <td data-bbox="430 367 808 1396"> <p>Examples:</p> <p>a) SQ</p> <p>a), b) FZFG</p> <p>PRFG</p> <p>a), c) RA</p> <p>-RADZ</p> <p>-PL</p> <p>DS</p> <p>+FC</p> <p>a) to c) +SHRASN</p> <p>+TSGRRA</p> <p>FZDZ</p> <p>UP</p> <p>//</p> </td> <td data-bbox="815 367 1448 1396"> <p>Examples:</p> <p>SQUALL</p> <p>a), b) FREEZING FOG</p> <p>AERODROME PARTIALLY COVERED BY FOG</p> <p>a), c) MODERATE RAIN</p> <p>LIGHT RAIN AND DRIZZLE</p> <p>LIGHT ICE PELLETS</p> <p>MODERATE DUSTSTORM</p> <p>WELL-DEVELOPED FUNNEL CLOUD</p> <p>a) to c) HEAVY RAIN AND SNOW SHOWERS <i>or</i> HEAVY SHOWERS OF RAIN AND SNOW <i>or</i> SHOWERS OF HEAVY RAIN AND SNOW</p> <p>THUNDERSTORM WITH HEAVY HAIL AND RAIN</p> <p>MODERATE FREEZING DRIZZLE</p> <p>UNIDENTIFIED PRECIPITATION</p> <p>PRESENT WEATHER NOT AVAILABLE</p> </td> </tr> </table>	<p>Examples:</p> <p>a) SQ</p> <p>a), b) FZFG</p> <p>PRFG</p> <p>a), c) RA</p> <p>-RADZ</p> <p>-PL</p> <p>DS</p> <p>+FC</p> <p>a) to c) +SHRASN</p> <p>+TSGRRA</p> <p>FZDZ</p> <p>UP</p> <p>//</p>	<p>Examples:</p> <p>SQUALL</p> <p>a), b) FREEZING FOG</p> <p>AERODROME PARTIALLY COVERED BY FOG</p> <p>a), c) MODERATE RAIN</p> <p>LIGHT RAIN AND DRIZZLE</p> <p>LIGHT ICE PELLETS</p> <p>MODERATE DUSTSTORM</p> <p>WELL-DEVELOPED FUNNEL CLOUD</p> <p>a) to c) HEAVY RAIN AND SNOW SHOWERS <i>or</i> HEAVY SHOWERS OF RAIN AND SNOW <i>or</i> SHOWERS OF HEAVY RAIN AND SNOW</p> <p>THUNDERSTORM WITH HEAVY HAIL AND RAIN</p> <p>MODERATE FREEZING DRIZZLE</p> <p>UNIDENTIFIED PRECIPITATION</p> <p>PRESENT WEATHER NOT AVAILABLE</p>	
<p>Examples:</p> <p>a) SQ</p> <p>a), b) FZFG</p> <p>PRFG</p> <p>a), c) RA</p> <p>-RADZ</p> <p>-PL</p> <p>DS</p> <p>+FC</p> <p>a) to c) +SHRASN</p> <p>+TSGRRA</p> <p>FZDZ</p> <p>UP</p> <p>//</p>	<p>Examples:</p> <p>SQUALL</p> <p>a), b) FREEZING FOG</p> <p>AERODROME PARTIALLY COVERED BY FOG</p> <p>a), c) MODERATE RAIN</p> <p>LIGHT RAIN AND DRIZZLE</p> <p>LIGHT ICE PELLETS</p> <p>MODERATE DUSTSTORM</p> <p>WELL-DEVELOPED FUNNEL CLOUD</p> <p>a) to c) HEAVY RAIN AND SNOW SHOWERS <i>or</i> HEAVY SHOWERS OF RAIN AND SNOW <i>or</i> SHOWERS OF HEAVY RAIN AND SNOW</p> <p>THUNDERSTORM WITH HEAVY HAIL AND RAIN</p> <p>MODERATE FREEZING DRIZZLE</p> <p>UNIDENTIFIED PRECIPITATION</p> <p>PRESENT WEATHER NOT AVAILABLE</p>		
<p><i>or</i></p>	<p><i>or</i></p>		
<p>d) indication by the abbreviation VC of the occurrence of selected present weather conditions in <b>the proximity</b> of the aerodrome. Columns 2, 3 and 4 of Table A1-1 apply.</p> <p><i>Note.— No intensity is applied to weather phenomena reported in the vicinity of the aerodrome.</i></p>	<p>d) (characteristic) and/or (w'w' phenomena) IN VICINITY</p> <p><i>Note.— Columns 2, 3 and 4 of Table A1-1 apply to the decode and phraseologies.</i></p>		

Input data from METAR or SPECI	Phraseologies
<p>Examples:</p> <p>d), a) VCFG</p> <p>d), b) VCSH</p> <p>d), b), a) VCBLDU</p>	<p>Examples:</p> <p>d), a) FOG IN VICINITY</p> <p>d), b) SHOWERS IN VICINITY</p> <p>d), b), a) BLOWING DUST IN VICINITY</p>
<p><b>7.2</b> Up to three groups of w'w' may be reported in a METAR or SPECI.</p>	<p><b>7.2</b> Up to three sets of the present weather details may be transmitted related to one aerodrome, as necessary.</p> <p><i>Note.— The phraseologies in 7.1 a) to d) apply to individual sets of the present weather details.</i></p>
<p>Example:</p> <p>–RADZ BR VCTS</p>	<p>Example:</p> <p>LIGHT RAIN AND DRIZZLE, MIST, THUNDERSTORM IN VICINITY</p>
<p><b>8. Cloud, vertical visibility</b> N<sub>s</sub>N<sub>s</sub>N<sub>s</sub>h<sub>s</sub>h<sub>s</sub>h<sub>s</sub>(cc) VVh<sub>s</sub>h<sub>s</sub>h<sub>s</sub> NSC</p> <p><i>Note.— h<sub>s</sub>h<sub>s</sub>h<sub>s</sub> reported in increments of 100 ft (30 m).</i></p>	<p><b>8. Cloud, vertical visibility</b></p> <p><i>Note.— Feet (ft) or metres (m) should be used for height of cloud base and vertical visibility in VOLMET transmissions.</i></p>
<p><b>8.1 Cloud</b> N<sub>s</sub>N<sub>s</sub>N<sub>s</sub>h<sub>s</sub>h<sub>s</sub>h<sub>s</sub> and/or N<sub>s</sub>N<sub>s</sub>N<sub>s</sub>h<sub>s</sub>h<sub>s</sub>h<sub>s</sub>(cc)</p> <p><i>Note.— Up to a maximum of three layers of clouds of operational significance, i.e. below 1 500 m (5 000 ft) or below the highest minimum altitude, whichever is greater, and/or one "layer" of cumulonimbus (CB for cc) or towering cumulus (TCU for cc) clouds may be reported in a METAR or SPECI.</i></p>	<p><b>8.1 Cloud</b> CLOUD (amount) (height) (units) and/or (amount) [CB] or [TOWERING CUMULUS] (height) (units)</p> <p><i>Note 1.— Up to a maximum of three layers of clouds and/or one "layer" of CB or TCU may be transmitted related to one aerodrome.</i></p> <p><i>Note 2.— The procedure in 5.2.1.4.1.2 of Annex 10, Volume II, applies to the height.</i></p>

Input data from METAR or SPECI	Phraseologies
<p>Examples:</p> <p>SCT010 OVC020</p> <p>FEW005 FEW010CB SCT018 BKN025</p> <p>BKN///</p> <p>///012</p> <p>FEW020///</p> <p>SCT///CB</p> <p>///020TCU</p> <p>/////CB</p>	<p>Examples:</p> <p>CLOUD SCATTERED THREE HUNDRED METRES, OVERCAST SIX HUNDRED METRES</p> <p>CLOUD FEW FIVE HUNDRED FEET, FEW CB ONE THOUSAND FEET, SCATTERED ONE THOUSAND EIGHT HUNDRED FEET, BROKEN TWO THOUSAND FIVE HUNDRED FEET</p> <p>CLOUD BROKEN HEIGHT OF CLOUD BASE NOT AVAILABLE</p> <p>CLOUD ONE THOUSAND TWO HUNDRED FEET CLOUD AMOUNT NOT AVAILABLE</p> <p>CLOUD FEW TWO THOUSAND FEET CLOUD TYPE NOT AVAILABLE</p> <p>CLOUD SCATTERED CB HEIGHT OF CLOUD BASE NOT AVAILABLE</p> <p>CLOUD TCU TWO THOUSAND FEET CLOUD AMOUNT NOT AVAILABLE</p> <p>CLOUD CB CLOUD AMOUNT AND HEIGHT OF CLOUD BASE NOT AVAILABLE</p>
<p>or</p>	<p>or</p>
<p><b>8.2 Vertical visibility</b> VVh<sub>s</sub>n<sub>s</sub>h<sub>s</sub></p>	<p><b>8.2 Vertical visibility</b> VERTICAL VISIBILITY (distance) (units)</p> <p><i>Note.— The procedure in 5.2.1.4.1.2 of Annex 10, Volume II, applies to the distance.</i></p>
<p>Examples:</p> <p>VV003</p> <p>VV004</p> <p>VV///</p>	<p>Examples:</p> <p>VERTICAL VISIBILITY THREE HUNDRED FEET</p> <p>VERTICAL VISIBILITY ONE TWO ZERO METRES</p> <p>VERTICAL VISIBILITY NOT AVAILABLE</p>
<p>or</p>	<p>or</p>

Input data from METAR or SPECI	Phraseologies		
<p><b>8.3 No clouds detected</b> NCD</p> <p>or</p> <p><b>8.4 No significant cloud</b> NSC</p> <p><i>Note.— Reported when no clouds of operational significance occur (i.e. no clouds occur below 1 500 m (5 000 ft) or below the highest/minimum sector altitude, whichever is greater, or no CB or TCU occurs at any height), there is no restriction on vertical visibility and CAVOK does not apply.</i></p> <p><b>9. CAVOK statement</b> CAVOK</p> <p><i>Note.— CAVOK may be reported to replace information on meteorological conditions given in 5 to 8.</i></p> <p><b>10. Temperature and dew-point temperature</b> T'T'/T<sub>d</sub>T<sub>d</sub></p>	<p><b>8.3 No clouds detected</b> NO CLOUDS DETECTED</p> <p>or</p> <p><b>8.4 No significant cloud</b> NIL SIGNIFICANT CLOUD</p> <p><b>9. CAVOK statement</b> CAVOK</p> <p><i>Note.— To be pronounced as a spoken word KAV-OH-KAY.</i></p> <p><b>10. Temperature and dew-point temperature</b> TEMPERATURE [MINUS] (number) DEW POINT [MINUS] (number)</p> <p><i>Note.— Degrees Celsius should be used.</i></p>		
<table border="1"> <tr> <td style="padding: 5px;"> <p>Example:</p> <p>04/M02</p> </td> <td style="padding: 5px;"> <p>Example:</p> <p>TEMPERATURE FOUR DEW POINT MINUS TWO</p> </td> </tr> </table>		<p>Example:</p> <p>04/M02</p>	<p>Example:</p> <p>TEMPERATURE FOUR DEW POINT MINUS TWO</p>
<p>Example:</p> <p>04/M02</p>	<p>Example:</p> <p>TEMPERATURE FOUR DEW POINT MINUS TWO</p>		
<p><b>11. Pressure</b> QP<sub>H</sub>P<sub>H</sub>P<sub>H</sub>P<sub>H</sub></p> <p><i>Note.— Several States have notified a difference from the relevant provisions of Annex 5 and report the pressure in inches of mercury as AP<sub>H</sub>P<sub>H</sub>P<sub>H</sub>P<sub>H</sub>.</i></p>	<p><b>11. Pressure</b> QNH (number) [units]</p> <p><i>Note 1.— QNH should be pronounced using individual letters in non-phonetic form.</i></p> <p><i>Note 2.— For QNH below 1 000 hPa, the number is preceded by ZERO.</i></p> <p><i>Note 3.— If the units are transmitted in hectopascal (hPa), HECTOPASCAL should be pronounced as a spoken word.</i></p>		

Input data from METAR or SPECI	Phraseologies
<div data-bbox="430 325 1193 504" style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Examples:</p> <p>Q1026</p> <p>Q0987</p> </div> <p><b>12. Supplementary information</b> REw'w' WS ...</p> <p><b>12.1 Recent weather of operational significance</b> REw'w'</p> <p><i>Note.1.— Columns 3 and 4 of Table A1-1 apply.</i></p> <p><i>Note 2.— No intensity is applied to recent weather of operational significance.</i></p>	<div data-bbox="824 325 1193 504" style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Examples:</p> <p>QNH ONE ZERO TWO SIX</p> <p>QNH ZERO NINE EIGHT SEVEN HECTOPASCALS</p> </div> <p><b>12. Supplementary information</b></p> <p><b>12.1 Recent weather of operational significance</b> RECENT WEATHER (detail)</p> <p><i>Note.— Columns 3 and 4 of Table A1-1 apply to the phraseologies.</i></p>
<div data-bbox="430 900 1193 1396" style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Examples:</p> <p>REFZDZ</p> <p>REBLSN</p> <p>RERA</p> <p>RETS</p> <p>RESS</p> <p>REVA</p> </div> <p><b>12.2 Up to three groups of RE w'w'</b> may be reported in a METAR or SPECI.</p> <p><b>12.3 Wind shear</b> WS RWY<sub>D<sub>R</sub></sub><sub>D<sub>R</sub></sub></p> <p><i>or</i></p> <p>WS ALLRWY</p>	<div data-bbox="824 900 1193 1396" style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Examples:</p> <p>RECENT WEATHER FREEZING DRIZZLE</p> <p>RECENT WEATHER BLOWING SNOW</p> <p>RECENT WEATHER RAIN</p> <p>RECENT WEATHER THUNDERSTORM WITH HAIL AND RAIN</p> <p>RECENT WEATHER SANDSTORM</p> <p>RECENT WEATHER VOLCANIC ASH</p> </div> <p><b>12.2 Up to three sets of recent weather details</b> may be transmitted related to one aerodrome, as necessary.</p> <p><i>Note.— Single words RECENT WEATHER precede up to three sets of recent weather details. The phraseologies in 12.1 apply to individual sets of recent weather details.</i></p> <p><b>12.3 Wind shear</b> WIND SHEAR RUNWAY (number)</p> <p><i>or</i></p> <p>WIND SHEAR ALL RUNWAYS</p>



Input data from METAR or SPECI	Phraseologies
<p><b>12.4 Sea-surface temperature and state of the sea or significant wave height</b>                      WT<sub>s</sub>T<sub>s</sub>/SS' or HH<sub>s</sub>H<sub>s</sub>H<sub>s</sub></p> <p><i>Note.— This item may be reported, in accordance with regional air navigation agreement, from offshore structures to support international helicopter operations. No VOLMET broadcast currently contained in the regional air navigation plans includes METAR and SPECI from such offshore structures.</i></p> <p><b>12.5 State of the runway</b>                      D<sub>r</sub>D<sub>r</sub>E<sub>r</sub>C<sub>r</sub>E<sub>r</sub>E<sub>r</sub>B<sub>r</sub>B<sub>r</sub></p> <p><i>Note 1.— This item may be appended to the METAR, in accordance with regional air navigation agreement, primarily for flight dispatch purposes.</i></p> <p><i>Note 2.— Up to a maximum of four state of the runway groups may be reported in a METAR or SPECI.</i></p> <p><b>13. Trend forecast</b>                      NOSIG or TTTT TTGGgg + dddffG<sub>f</sub>f<sub>m</sub> VVVV w'w' NSW                      N<sub>s</sub>N<sub>s</sub>N<sub>s</sub>h<sub>s</sub>h<sub>s</sub>h<sub>s</sub>(cc) VVh<sub>s</sub>h<sub>s</sub>h<sub>s</sub> NSC CAVOK, as appropriate</p> <p><i>Note.— The period of validity of a trend forecast is two hours from the time of observation given in 2.</i></p> <p><b>13.1 NOSIG statement</b>                      NOSIG</p> <p>or</p>	<p><b>12.4 Sea-surface temperature and state of the sea or the significant wave height</b>                      SEA SURFACE TEMPERATURE [MINUS] (number)                      STATE OF THE SEA (number)</p> <p>or</p> <p>SEA SURFACE TEMPERATURE [MINUS] (number)                      SIGNIFICANT WAVE HEIGHT (number) DECIMETERS</p> <p><i>Note.— Degrees Celsius should be used for sea surface temperature.</i></p> <p><b>12.5 State of the runway</b>                      STATE OF RUNWAY (number)(detail)</p> <p><b>13. Trend forecast</b></p> <p><b>13.1 NOSIG statement</b>                      NOSIG</p> <p><i>Note.— To be pronounced as spoken word (meaning no significant change in weather conditions).</i></p> <p>or</p>

Input data from METAR or SPECI	Phraseologies										
<p><b>13.2 Expected trend of meteorological conditions</b> TTTT TTGGgg + dddffGf<sub>m</sub>f<sub>m</sub> VVVV w'w' NSW N<sub>s</sub>N<sub>s</sub>N<sub>s</sub>h<sub>s</sub>h<sub>s</sub>h<sub>s</sub>(cc) VVh<sub>s</sub>h<sub>s</sub>h<sub>s</sub> NSC CAVOK, as appropriate</p> <p>a) <b>Becoming</b> BECMG TTGGgg + ... (see above)</p> <p><i>and/or</i></p> <p>b) <b>Temporary</b> TEMPO TTGGgg + ... (see above)</p>	<p><b>13.2 Expected trend of meteorological conditions</b></p> <p><i>Note.— Relevant phraseologies given in 4, 5, 7, 8 and 9 apply to the details of meteorological conditions to be transmitted.</i></p> <p>a) <b>Becoming</b> TREND BECOMING FROM (hours minutes) (detail) <i>or</i> TREND BECOMING TILL (hours minutes) (detail) <i>or</i> TREND BECOMING FROM (hours minutes) TILL (hours minutes) (detail) <i>or</i> TREND BECOMING AT (hours minutes) (detail) <i>or</i> TREND BECOMING (detail)</p> <p><i>and/or</i></p> <p>b) <b>Temporary</b> TREND TEMPORARY FROM (hours minutes) (detail) <i>or</i> TREND TEMPORARY TILL (hours minutes) (detail) <i>or</i> TREND TEMPORARY FROM (hours minutes) TILL (hours minutes) (detail) <i>or</i> TREND TEMPORARY (detail)</p>										
<table border="1"> <thead> <tr> <th data-bbox="430 1192 808 1228">Examples:</th> <th data-bbox="815 1192 1193 1228">Examples:</th> </tr> </thead> <tbody> <tr> <td data-bbox="430 1249 808 1291">BECMG FM1700 0800 FG</td> <td data-bbox="815 1249 1193 1333">TREND, BECOMING FROM ONE SEVEN ZERO ZERO VISIBILITY EIGHT HUNDRED METRES FOG</td> </tr> <tr> <td data-bbox="430 1354 808 1396">BECMG TL0730 9999 NSW</td> <td data-bbox="815 1354 1193 1491">TREND, BECOMING TILL ZERO SEVEN THREE ZERO VISIBILITY ONE ZERO KILOMETRES OR MORE, NIL SIGNIFICANT WEATHER</td> </tr> <tr> <td data-bbox="430 1512 808 1575">TEMPO FM1130 TL1300 +SHRA BKN008CB</td> <td data-bbox="815 1512 1193 1648">TREND, TEMPORARY FROM ONE ONE THREE ZERO TILL ONE THREE ZERO ZERO HEAVY RAIN SHOWER, BROKEN CB EIGHT HUNDRED FEET</td> </tr> <tr> <td data-bbox="430 1669 808 1732">TEMPO 25020G35KT BECMG AT1800 NSC</td> <td data-bbox="815 1669 1193 1837">TREND, TEMPORARY WIND TWO FIVE ZERO DEGREES TWO ZERO KNOTS GUSTING TO THREE FIVE KNOTS, BECOMING AT ONE EIGHT ZERO ZERO NIL SIGNIFICANT CLOUD</td> </tr> </tbody> </table>		Examples:	Examples:	BECMG FM1700 0800 FG	TREND, BECOMING FROM ONE SEVEN ZERO ZERO VISIBILITY EIGHT HUNDRED METRES FOG	BECMG TL0730 9999 NSW	TREND, BECOMING TILL ZERO SEVEN THREE ZERO VISIBILITY ONE ZERO KILOMETRES OR MORE, NIL SIGNIFICANT WEATHER	TEMPO FM1130 TL1300 +SHRA BKN008CB	TREND, TEMPORARY FROM ONE ONE THREE ZERO TILL ONE THREE ZERO ZERO HEAVY RAIN SHOWER, BROKEN CB EIGHT HUNDRED FEET	TEMPO 25020G35KT BECMG AT1800 NSC	TREND, TEMPORARY WIND TWO FIVE ZERO DEGREES TWO ZERO KNOTS GUSTING TO THREE FIVE KNOTS, BECOMING AT ONE EIGHT ZERO ZERO NIL SIGNIFICANT CLOUD
Examples:	Examples:										
BECMG FM1700 0800 FG	TREND, BECOMING FROM ONE SEVEN ZERO ZERO VISIBILITY EIGHT HUNDRED METRES FOG										
BECMG TL0730 9999 NSW	TREND, BECOMING TILL ZERO SEVEN THREE ZERO VISIBILITY ONE ZERO KILOMETRES OR MORE, NIL SIGNIFICANT WEATHER										
TEMPO FM1130 TL1300 +SHRA BKN008CB	TREND, TEMPORARY FROM ONE ONE THREE ZERO TILL ONE THREE ZERO ZERO HEAVY RAIN SHOWER, BROKEN CB EIGHT HUNDRED FEET										
TEMPO 25020G35KT BECMG AT1800 NSC	TREND, TEMPORARY WIND TWO FIVE ZERO DEGREES TWO ZERO KNOTS GUSTING TO THREE FIVE KNOTS, BECOMING AT ONE EIGHT ZERO ZERO NIL SIGNIFICANT CLOUD										

Input data from METAR or SPECI	Phraseologies
<p><b>14. Remarks</b> RMK</p> <p><i>Note.— Some messages may also include a remark by a national decision. Such a remark should not be included in any international VOLMET broadcast.</i></p>	<p><b>14. Remarks</b> Not applicable</p>

### 3. TAF

*Note 1.— In accordance with regional air navigation agreement, HF VOLMET broadcasts may be used for the transmission of aerodrome forecasts to aircraft en route. TAF are used for these VOLMET transmissions. Amendments to the forecasts should be issued, as necessary, between the routine issues of the forecasts.*

*Note 2.— Each TAF to be broadcast should be introduced by the code name TAF<sup>2</sup>. If a TAF is not available for the VOLMET broadcast concerned, or contains substantial errors in its content and/or form, the phrase NIL FORECAST should replace the message.*

*Note 3.— Each TAF AMD, i.e. an amended TAF that ensures the forecast reflects the latest opinion of the aerodrome meteorological office concerned (if available to be broadcast), should be introduced by the phrase TAF AMENDED. As soon as such a message is introduced in a VOLMET transmission, the relevant original TAF should be withdrawn from the transmission.*

Input data from TAF and amendments to the TAF	Phraseologies		
<p><b>1. Aerodrome</b> CCCC</p>	<p><b>1. Aerodrome</b> (name)</p> <p><i>Note.— The name of the aerodrome should be as indicated in the relevant VOLMET broadcast table of the regional air navigation plan concerned. AOP Table, column 1 of the same publication includes names of aerodromes together with relevant location indicators CCCC.</i></p>		
<table border="1" style="width: 100%;"> <tr> <td style="width: 50%;"> <p>Example: YUDO*</p> <p>*Fictitious location</p> </td> <td style="width: 50%;"> <p>Example: DONLON*</p> </td> </tr> </table>		<p>Example: YUDO*</p> <p>*Fictitious location</p>	<p>Example: DONLON*</p>
<p>Example: YUDO*</p> <p>*Fictitious location</p>	<p>Example: DONLON*</p>		
<p><b>2. Day and time of origin of the forecast</b> YYGGggZ</p>	<p><b>2. Day and time of origin of the forecast</b></p> <p><i>Note.— This information is required primarily for data processing purposes and need not be broadcast.</i></p>		

<sup>2</sup> To be pronounced as a spoken word.

Input data from TAF and amendments to the TAF	Phraseologies
<p><b>3. Period of validity of the forecast</b> Y<sub>1</sub>Y<sub>1</sub>G<sub>1</sub>G<sub>1</sub> Y<sub>2</sub>Y<sub>2</sub>G<sub>2</sub>G<sub>2</sub></p> <p><i>Note.— Y<sub>1</sub>Y<sub>1</sub>G<sub>1</sub>G<sub>1</sub> indicates a day of the month and the time of the beginning of the forecast period. G<sub>2</sub>G<sub>2</sub> indicates the end of the period of validity.</i></p>	<p><b>3. Period of validity of the forecast</b> VALID FROM (day hours minutes) TILL (day hours minutes)</p> <p><i>Note.— Each TAF or TAF AMD to be transmitted should include its period of validity.</i></p>
<p>Examples:</p> <p>16121621</p> <p>31003109</p>	<p>Examples:</p> <p>VALID FROM ONE SIX ONE TWO ZERO ZERO TILL ONE SIX TWO ONE ZERO ZERO</p> <p>VALID FROM THREE ONE ZERO ZERO ZERO ZERO TILL THREE ONE ZERO NINE ZERO ZERO</p>
<p><b>4. Forecast of surface wind</b> ddffG<sub>f</sub>m<sub>f</sub>mKT or MPS</p> <p><i>Note.— The maximum surface wind speed values to be forecast are 100 kt or more and 50 mps or more. PP99 kt and 49 mps respectively indicate these values in TAF and TAF AMD.</i></p>	<p><b>4. Forecast of surface wind</b></p> <p><i>Note 1.— Knots (kt) or metres per second (mps) should be used for wind speed in VOLMET transmissions.</i></p> <p><i>Note 2.— True wind direction values are forecast and broadcast in TAF.</i></p>
<p><b>4.1 Wind direction, speed</b> ddffKT or MPS</p>	<p><b>4.1 Wind direction, speed</b> WIND (number) DEGREES (number) (units)</p>
<p>Examples:</p> <p>01015KT</p> <p>330P49MPS</p>	<p>Examples:</p> <p>WIND ZERO ONE ZERO DEGREES ONE FIVE KNOTS</p> <p>WIND THREE THREE ZERO DEGREES ABOVE FOUR NINE METRES PER SECOND</p>
<p><b>4.2 Wind direction, speed and maximum speed</b> ddffG<sub>f</sub>m<sub>f</sub>mKT or MPS</p>	<p><b>4.2 Wind direction, speed and maximum speed</b> WIND (number) DEGREES (number) [units] GUSTING TO (number) (units)</p>
<p>Examples:</p> <p>26006G10MPS</p> <p>06045G60KT</p> <p>14075GP99KT</p>	<p>Examples:</p> <p>WIND TWO SIX ZERO DEGREES ZERO SIX GUSTING TO ONE ZERO METRES PER SECOND</p> <p>WIND ZERO SIX ZERO DEGREES FOUR FIVE GUSTING TO SIX ZERO KNOTS</p> <p>WIND ONE FOUR ZERO DEGREES SEVEN FIVE KNOTS GUSTING TO ABOVE NINE NINE KNOTS</p>

Input data from TAF and amendments to the TAF	Phraseologies
<p><b>4.3 Variable wind</b> VRBffKT or MPS</p> <p>Example: VRB03KT</p>	<p><b>4.3 Variable wind</b> WIND VARIABLE (number) (units)</p> <p>Example: WIND VARIABLE THREE KNOTS</p>
<p><b>4.4 Calm</b> 0000KT or MPS</p> <p>Example: 0000MPS</p>	<p><b>4.4 Calm</b> WIND CALM</p> <p><i>Note.— To be pronounced as spoken words.</i></p> <p>Example: WIND CALM</p>
<p><b>5. Visibility forecast</b> VVVV</p> <p><i>Note 1.— Prevailing visibility values are forecast.</i></p> <p><i>Note 2.— Several States have notified a difference from the relevant provisions of Annex 5 by indicating that they forecast visibility in statute miles.</i></p> <p>Examples: 0 100 450 4900 5000 9000 9999</p>	<p><b>5. Visibility forecast</b> VISIBILITY (distance) (units)</p> <p><i>Note.— The procedure in 5.2.1.4.1.2 of Annex 10, Volume II, applies to the distance.</i></p> <p>Examples: VISIBILITY BELOW FIVE ZERO METRES VISIBILITY ONE HUNDRED METRES VISIBILITY FOUR FIVE ZERO METRES VISIBILITY FOUR THOUSAND NINE HUNDRED METRES VISIBILITY FIVE KILOMETRES VISIBILITY NINE KILOMETRES VISIBILITY ONE ZERO KILOMETRES OR MORE</p>

Input data from TAF and amendments to the TAF	Phraseologies																								
<p><b>6. Forecast weather</b> w'w' or NSW</p> <p><b>6.1 Forecast weather</b> w'w'</p> <p><i>Note 1.— Table A1-2, Forecast weather (w'w') decoding and phraseology, applies.</i></p> <p><i>Note 2.— Up to a maximum of three groups of forecast weather from the table, or suitable combinations thereof, including relevant characteristics and intensities may be forecast.</i></p> <p>One group of w'w' includes:</p> <ul style="list-style-type: none"> <li>• <b>a forecast weather phenomenon</b> or a suitable combination of weather phenomena in terms of types of precipitation;</li> <li>• <b>a characteristic of a relevant forecast weather phenomena</b>, as appropriate; and</li> <li>• <b>an intensity</b>, if appropriate.</li> </ul>	<p><b>6. Forecast weather</b></p> <p><b>6.1 Forecast weather</b> (detail)</p> <p><i>Note 1.— Table A1-2, Forecast weather (w'w') decoding and phraseology, applies to the details.</i></p> <p><i>Note 2.— Up to a maximum of three groups of forecast weather phraseologies from the table, or combinations thereof, including relevant characteristics and intensities may be broadcast.</i></p>																								
<table border="1"> <thead> <tr> <th data-bbox="435 966 808 993">Examples:</th> <th data-bbox="812 966 1185 993">Examples:</th> </tr> </thead> <tbody> <tr> <td data-bbox="435 1020 808 1047">SQ</td> <td data-bbox="812 1020 1185 1047">SQUALL</td> </tr> <tr> <td data-bbox="435 1075 808 1102">FZFG</td> <td data-bbox="812 1075 1185 1102">FREEZING FOG</td> </tr> <tr> <td data-bbox="435 1129 808 1157">PRFG</td> <td data-bbox="812 1129 1185 1178">AERODROME PARTIALLY COVERED BY FOG</td> </tr> <tr> <td data-bbox="435 1205 808 1232">RA</td> <td data-bbox="812 1205 1185 1232">MODERATE RAIN</td> </tr> <tr> <td data-bbox="435 1260 808 1287">RADZ</td> <td data-bbox="812 1260 1185 1287">MODERATE RAIN AND DRIZZLE</td> </tr> <tr> <td data-bbox="435 1314 808 1341">DS</td> <td data-bbox="812 1314 1185 1341">MODERATE DUSTSTORM</td> </tr> <tr> <td data-bbox="435 1369 808 1396">+FC</td> <td data-bbox="812 1369 1185 1396">WELL-DEVELOPED FUNNEL CLOUD</td> </tr> <tr> <td data-bbox="435 1423 808 1451">+SHRASN</td> <td data-bbox="812 1423 1185 1627">HEAVY RAIN AND SNOW SHOWERS <i>or</i> HEAVY SHOWERS OF RAIN AND SNOW <i>or</i> SHOWERS OF HEAVY RAIN AND SNOW</td> </tr> <tr> <td data-bbox="435 1654 808 1682">+TSGRRA</td> <td data-bbox="812 1654 1185 1703">THUNDERSTORM WITH HEAVY HAIL AND RAIN</td> </tr> <tr> <td data-bbox="435 1730 808 1757">FZDZ</td> <td data-bbox="812 1730 1185 1757">MODERATE FREEZING DRIZZLE</td> </tr> <tr> <td data-bbox="435 1785 808 1812">DZFG</td> <td data-bbox="812 1785 1185 1812">MODERATE DRIZZLE, FOG</td> </tr> </tbody> </table>	Examples:	Examples:	SQ	SQUALL	FZFG	FREEZING FOG	PRFG	AERODROME PARTIALLY COVERED BY FOG	RA	MODERATE RAIN	RADZ	MODERATE RAIN AND DRIZZLE	DS	MODERATE DUSTSTORM	+FC	WELL-DEVELOPED FUNNEL CLOUD	+SHRASN	HEAVY RAIN AND SNOW SHOWERS <i>or</i> HEAVY SHOWERS OF RAIN AND SNOW <i>or</i> SHOWERS OF HEAVY RAIN AND SNOW	+TSGRRA	THUNDERSTORM WITH HEAVY HAIL AND RAIN	FZDZ	MODERATE FREEZING DRIZZLE	DZFG	MODERATE DRIZZLE, FOG	
Examples:	Examples:																								
SQ	SQUALL																								
FZFG	FREEZING FOG																								
PRFG	AERODROME PARTIALLY COVERED BY FOG																								
RA	MODERATE RAIN																								
RADZ	MODERATE RAIN AND DRIZZLE																								
DS	MODERATE DUSTSTORM																								
+FC	WELL-DEVELOPED FUNNEL CLOUD																								
+SHRASN	HEAVY RAIN AND SNOW SHOWERS <i>or</i> HEAVY SHOWERS OF RAIN AND SNOW <i>or</i> SHOWERS OF HEAVY RAIN AND SNOW																								
+TSGRRA	THUNDERSTORM WITH HEAVY HAIL AND RAIN																								
FZDZ	MODERATE FREEZING DRIZZLE																								
DZFG	MODERATE DRIZZLE, FOG																								

Input data from TAF and amendments to the TAF	Phraseologies		
<p><b>6.2 Forecast of no significant weather</b> NSW</p> <p><i>Note.— Used to indicate the expected end of occurrence of a specific forecast weather when CAVOK forecast conditions do not apply (8 below refers).</i></p> <p><b>7. Cloud, vertical visibility, sky clear and no significant cloud forecasts</b> N<sub>s</sub>N<sub>s</sub>N<sub>s</sub>h<sub>s</sub>h<sub>s</sub>h<sub>s</sub>(cc) or VVh<sub>s</sub>h<sub>s</sub>h<sub>s</sub> or NSC</p> <p><i>Note.— h<sub>s</sub>h<sub>s</sub>h<sub>s</sub> forecast in increments of 100 ft (30 m).</i></p> <p><b>7.1 Cloud forecast</b> N<sub>s</sub>N<sub>s</sub>N<sub>s</sub>h<sub>s</sub>h<sub>s</sub>h<sub>s</sub> and/or N<sub>s</sub>N<sub>s</sub>N<sub>s</sub>h<sub>s</sub>h<sub>s</sub>h<sub>s</sub>(cc)</p> <p><i>Note. 1.— Up to a maximum of three layers of clouds and/or one “layer” of cumulonimbus (CB for cc) clouds may be forecast in a TAF.</i></p> <p><i>Note 2.— The cloud information should be limited to clouds of operational significance, i.e. the clouds below 1 500 m (5 000 ft) or the highest minimum sector altitude, whichever is greater and CB.</i></p>	<p><b>6.2 Forecast of no significant weather</b> NIL SIGNIFICANT WEATHER</p> <p><b>7. Cloud, vertical visibility, sky clear and no significant cloud forecasts</b></p> <p><i>Note.— Feet (ft) or metres (m) should be used for height of cloud base and vertical visibility in VOLMET transmissions.</i></p> <p><b>7.1 Cloud forecast</b> CLOUD (amount) (height) (units) and/or (amount) [CB] (height) (units)</p> <p><i>Note 1.— Up to a maximum of three layers of clouds and/or one “layer” of CB may be transmitted related to one aerodrome.</i></p> <p><i>Note 2.—The procedure in 5.2.1.4.1.2 of Annex 10, Volume II, applies to the height.</i></p>		
<table border="1" style="width: 100%;"> <tr> <td style="width: 50%; vertical-align: top;"> <p>Examples:</p> <p>SCT010 OVC020</p> <p>FEW005 FEW010CB SCT018 BKN025</p> </td> <td style="width: 50%; vertical-align: top;"> <p>Examples:</p> <p>CLOUD SCATTERED THREE HUNDRED METRES, OVERCAST SIX HUNDRED METRES</p> <p>CLOUD FEW FIVE HUNDRED FEET, FEW CB ONE THOUSAND FEET, SCATTERED ONE THOUSAND EIGHT HUNDRED FEET, BROKEN TWO THOUSAND FIVE HUNDRED FEET</p> </td> </tr> </table>		<p>Examples:</p> <p>SCT010 OVC020</p> <p>FEW005 FEW010CB SCT018 BKN025</p>	<p>Examples:</p> <p>CLOUD SCATTERED THREE HUNDRED METRES, OVERCAST SIX HUNDRED METRES</p> <p>CLOUD FEW FIVE HUNDRED FEET, FEW CB ONE THOUSAND FEET, SCATTERED ONE THOUSAND EIGHT HUNDRED FEET, BROKEN TWO THOUSAND FIVE HUNDRED FEET</p>
<p>Examples:</p> <p>SCT010 OVC020</p> <p>FEW005 FEW010CB SCT018 BKN025</p>	<p>Examples:</p> <p>CLOUD SCATTERED THREE HUNDRED METRES, OVERCAST SIX HUNDRED METRES</p> <p>CLOUD FEW FIVE HUNDRED FEET, FEW CB ONE THOUSAND FEET, SCATTERED ONE THOUSAND EIGHT HUNDRED FEET, BROKEN TWO THOUSAND FIVE HUNDRED FEET</p>		
<p>or</p> <p><b>7.2 Vertical visibility</b> VVh<sub>s</sub>h<sub>s</sub>h<sub>s</sub></p>	<p>or</p> <p><b>7.2 Vertical visibility</b> VERTICAL VISIBILITY (distance) (units)</p> <p><i>Note.— The procedure in 5.2.1.4.1.2 of Annex 10, Volume II, applies to the distance.</i></p>		

Input data from TAF and amendments to the TAF	Phraseologies
<p>Examples:</p> <p>VV004</p> <p>VV005</p> <p>VV///</p>	<p>Examples:</p> <p>VERTICAL VISIBILITY ONE TWO ZERO METRES</p> <p>VERTICAL VISIBILITY FIVE HUNDRED FEET</p> <p>VERTICAL VISIBILITY NOT AVAILABLE</p>
<p>or</p>	<p>or</p>
<p><b>7.3 Forecast of no significant cloud</b> NSC</p> <p><i>Note.— To be forecast when clouds of operational significance are not forecast and CAVOK does not apply.</i></p>	<p><b>7.3 Forecast of no significant cloud</b> NIL SIGNIFICANT CLOUD</p>
<p><b>8. CAVOK forecast</b> CAVOK</p> <p><i>Note.— CAVOK forecast may replace information on meteorological conditions given in 5 to 7.</i></p>	<p><b>8. CAVOK forecast</b> CAVOK</p> <p><i>Note.— To be pronounced as a spoken word KAV-OH-KAY.</i></p>
<p><b>9. Additional information included in the aerodrome forecasts</b></p> <p><i>Note.— A current requirement calls for the provision, in accordance with regional air navigation agreement, of the maximum and minimum temperatures expected to occur during the period of validity of the forecast.</i></p>	<p><b>9. Additional information included in the aerodrome forecasts</b></p>
<p><b>9.1 Maximum and minimum temperature forecast</b> TX<sub>T<sub>F</sub></sub>T<sub>F</sub>/Y<sub>f</sub>Y<sub>f</sub>G<sub>F</sub>G<sub>F</sub>Z TN<sub>T<sub>F</sub></sub>T<sub>F</sub>/Y<sub>f</sub>Y<sub>f</sub>G<sub>F</sub>G<sub>F</sub>Z</p> <p><i>Note.— Two maximum or minimum temperatures may be given as necessary.</i></p>	<p><b>9.1 Maximum and minimum temperature forecast</b> MAXIMUM TEMPERATURE (number) AT (day hours minutes) MINIMUM TEMPERATURE [MINUS] (number) AT (day hours minutes)</p> <p><i>Note.— Degrees Celsius should be used.</i></p>
<p>Example:</p> <p>TX34/2516Z TN20/2604Z</p>	<p>Example:</p> <p>MAXIMUM TEMPERATURE THREE FOUR AT TWO FIVE ONE SIX ZERO ZERO, MINIMUM TEMPERATURE TWO ZERO AT TWO SIX ZERO FOUR ZERO ZERO</p>



Input data from TAF and amendments to the TAF	Phraseologies														
<p><b>10. Indicators for changes in forecast conditions and probability of occurrence of alternative conditions or temporary fluctuations</b>                      BECMG YYGGY<sub>e</sub>Y<sub>e</sub>G<sub>e</sub>G<sub>e</sub> or FMYYGGgg or                      TEMPO YYGGY<sub>e</sub>Y<sub>e</sub>G<sub>e</sub>G<sub>e</sub>                      or                      PROBC<sub>2</sub>C<sub>2</sub> YYGGY<sub>e</sub>Y<sub>e</sub>G<sub>e</sub>G<sub>e</sub> or PROBC<sub>2</sub>C<sub>2</sub>                      TEMPO YYGGY<sub>e</sub>Y<sub>e</sub>G<sub>e</sub>G<sub>e</sub></p> <p><b>10.1 Change indicators</b>                      BECMG YYGGG<sub>e</sub>G<sub>e</sub>}      dddff Gfmfm VVVV w'w' NSW                      or }                              N<sub>s</sub>N<sub>s</sub>N<sub>s</sub>N<sub>s</sub>h<sub>s</sub>h<sub>s</sub>(cc) VVh<sub>s</sub>h<sub>s</sub>                      FMYYGGgg }      +      NSC CAVOK,                      or }                              as appropriate                      TEMPO                      YYGGY<sub>e</sub>Y<sub>e</sub>G<sub>e</sub>G<sub>e</sub> }</p>	<p><b>10. Indicators for changes in forecast conditions and probability of occurrence of alternative conditions or temporary fluctuations</b></p> <p><i>Note.— Relevant phraseologies given in 4 to 8 apply to the details of forecast conditions to be broadcast.</i></p> <p><b>10.1 Change indicators</b>                      BECOMING FROM (day hours minutes) TILL (day hours minutes) (detail)                      or                      FROM (day hours minutes) (detail)                      or                      TEMPORARY BETWEEN (day hours minutes) AND (day hours minutes) (detail)</p>														
<table border="1"> <thead> <tr> <th data-bbox="430 814 808 850">Examples:</th> <th data-bbox="815 814 1445 850">Examples:</th> </tr> </thead> <tbody> <tr> <td data-bbox="430 856 808 924">BECMG 14101411 00000 1200 BR OVC010</td> <td data-bbox="815 856 1445 1050">BECOMING FROM ONE FOUR ONE ZERO ZERO ZERO TILL ONE FOUR ONE ONE ZERO ZERO CALM, VISIBILITY ONE THOUSAND TWO HUNDRED METRES MIST, CLOUD OVERCAST THREE HUNDRED METRES</td> </tr> <tr> <td data-bbox="430 1060 808 1092">BECMG 27122714 RA</td> <td data-bbox="815 1060 1445 1165">BECOMING FROM TWO SEVEN ONE TWO ZERO ZERO TILL TWO SEVEN ONE FOUR ZERO ZERO MODERATE RAIN</td> </tr> <tr> <td data-bbox="430 1176 808 1207">FM091030 8000 NSW NSC</td> <td data-bbox="815 1176 1445 1291">FROM ZERO NINE ONE ZERO THREE ZERO VISIBILITY EIGHT KILOMETRES NIL SIGNIFICANT WEATHER, NIL SIGNIFICANT CLOUD</td> </tr> <tr> <td data-bbox="430 1302 808 1333">FM181800 +SNSH FEW008CB</td> <td data-bbox="815 1302 1445 1417">FROM ONE EIGHT ONE EIGHT ZERO ZERO HEAVY SNOW SHOWERS, CLOUD FEW EIGHT HUNDRED FEET</td> </tr> <tr> <td data-bbox="430 1428 808 1459">TEMPO 21152118 25035G45KT</td> <td data-bbox="815 1428 1445 1585">TEMPORARY BETWEEN TWO ONE ONE FIVE ZERO ZERO AND TWO ONE ONE EIGHT ZERO ZERO WIND TWO FIVE ZERO DEGREES THREE FIVE KNOTS GUSTING TO FOUR FIVE KNOTS</td> </tr> <tr> <td data-bbox="430 1596 808 1627">TEMPO 05180520 0400 BLSN</td> <td data-bbox="815 1596 1445 1774">TEMPORARY BETWEEN ZERO FIVE ONE EIGHT ZERO ZERO AND ZERO FIVE TWO ZERO ZERO ZERO VISIBILITY FOUR HUNDRED METRES, MODERATE BLOWING SNOW</td> </tr> </tbody> </table>		Examples:	Examples:	BECMG 14101411 00000 1200 BR OVC010	BECOMING FROM ONE FOUR ONE ZERO ZERO ZERO TILL ONE FOUR ONE ONE ZERO ZERO CALM, VISIBILITY ONE THOUSAND TWO HUNDRED METRES MIST, CLOUD OVERCAST THREE HUNDRED METRES	BECMG 27122714 RA	BECOMING FROM TWO SEVEN ONE TWO ZERO ZERO TILL TWO SEVEN ONE FOUR ZERO ZERO MODERATE RAIN	FM091030 8000 NSW NSC	FROM ZERO NINE ONE ZERO THREE ZERO VISIBILITY EIGHT KILOMETRES NIL SIGNIFICANT WEATHER, NIL SIGNIFICANT CLOUD	FM181800 +SNSH FEW008CB	FROM ONE EIGHT ONE EIGHT ZERO ZERO HEAVY SNOW SHOWERS, CLOUD FEW EIGHT HUNDRED FEET	TEMPO 21152118 25035G45KT	TEMPORARY BETWEEN TWO ONE ONE FIVE ZERO ZERO AND TWO ONE ONE EIGHT ZERO ZERO WIND TWO FIVE ZERO DEGREES THREE FIVE KNOTS GUSTING TO FOUR FIVE KNOTS	TEMPO 05180520 0400 BLSN	TEMPORARY BETWEEN ZERO FIVE ONE EIGHT ZERO ZERO AND ZERO FIVE TWO ZERO ZERO ZERO VISIBILITY FOUR HUNDRED METRES, MODERATE BLOWING SNOW
Examples:	Examples:														
BECMG 14101411 00000 1200 BR OVC010	BECOMING FROM ONE FOUR ONE ZERO ZERO ZERO TILL ONE FOUR ONE ONE ZERO ZERO CALM, VISIBILITY ONE THOUSAND TWO HUNDRED METRES MIST, CLOUD OVERCAST THREE HUNDRED METRES														
BECMG 27122714 RA	BECOMING FROM TWO SEVEN ONE TWO ZERO ZERO TILL TWO SEVEN ONE FOUR ZERO ZERO MODERATE RAIN														
FM091030 8000 NSW NSC	FROM ZERO NINE ONE ZERO THREE ZERO VISIBILITY EIGHT KILOMETRES NIL SIGNIFICANT WEATHER, NIL SIGNIFICANT CLOUD														
FM181800 +SNSH FEW008CB	FROM ONE EIGHT ONE EIGHT ZERO ZERO HEAVY SNOW SHOWERS, CLOUD FEW EIGHT HUNDRED FEET														
TEMPO 21152118 25035G45KT	TEMPORARY BETWEEN TWO ONE ONE FIVE ZERO ZERO AND TWO ONE ONE EIGHT ZERO ZERO WIND TWO FIVE ZERO DEGREES THREE FIVE KNOTS GUSTING TO FOUR FIVE KNOTS														
TEMPO 05180520 0400 BLSN	TEMPORARY BETWEEN ZERO FIVE ONE EIGHT ZERO ZERO AND ZERO FIVE TWO ZERO ZERO ZERO VISIBILITY FOUR HUNDRED METRES, MODERATE BLOWING SNOW														
or	or														

Input data from TAF and amendments to the TAF	Phraseologies
<p><b>10.2 Probability of occurrence of alternative conditions or temporary fluctuations</b>                      PROB30 TEMPO YYGGY<sub>e</sub>Y<sub>e</sub>G<sub>e</sub>G<sub>e</sub> }                      or } + dddfff G<sub>f</sub>m<sub>f</sub>m                      PROB40 TEMPO YYGGY<sub>e</sub>Y<sub>e</sub>G<sub>e</sub>G<sub>e</sub> } + VVVV w'w' NSW                      or } + N<sub>s</sub>N<sub>s</sub>N<sub>s</sub> h<sub>s</sub>h<sub>s</sub>h<sub>s</sub>CC VVh<sub>s</sub>h<sub>s</sub>h<sub>s</sub>                      PROB30 YYGGY<sub>e</sub>Y<sub>e</sub>G<sub>e</sub>G<sub>e</sub> } + NSC CAVOK                      or } + as appropriate                      PROB40 YYGGY<sub>e</sub>Y<sub>e</sub>G<sub>e</sub>G<sub>e</sub> }</p>	<p><b>10.2 Probability of occurrence of alternative conditions or temporary fluctuations</b>                      PROBABILITY THREE ZERO or FOUR ZERO                      TEMPORARY BETWEEN (day hours minutes) AND (day hours minutes) (detail)                      or                      PROBABILITY THREE ZERO or FOUR ZERO BETWEEN (day hours minutes) AND (day hours minutes) (detail)</p>
<p>Examples:</p> <p>PROB40 TEMPO 09060908 0500 FG</p> <p>00000 1200 FZDZ OVC005 PROB30 0507 0400 FZFG OVC002</p> <p>TEMPO 12151217 TSRA SCT010CB PROB40 12161217 +TSGRRA</p>	<p>Examples:</p> <p>PROBABILITY FOUR ZERO TEMPORARY BETWEEN ZERO NINE ZERO SIX ZERO ZERO AND ZERO NINE ZERO EIGHT ZERO ZERO VISIBILITY FIVE HUNDRED METRES FOG</p> <p>CALM, VISIBILITY ONE THOUSAND TWO HUNDRED METRES MODERATE FREEZING DRIZZLE, CLOUD OVERCAST ONE FIVE ZERO METRES, PROBABILITY THREE ZERO BETWEEN ZERO FIVE ZERO ZERO AND ZERO SEVEN ZERO ZERO VISIBILITY FOUR HUNDRED METRES, FREEZING FOG, CLOUD OVERCAST SIX ZERO METRES</p> <p>TEMPORARY BETWEEN ONE TWO ONE FIVE ZERO ZERO AND ONE TWO ONE SEVEN ZERO ZERO THUNDERSTORM WITH MODERATE RAIN, CLOUD SCATTERED ONE THOUSAND FEET, PROBABILITY FOUR ZERO BETWEEN ONE TWO ONE SIX ZERO ZERO AND ONE TWO ONE SEVEN ZERO ZERO THUNDERSTORM WITH HEAVY HAIL AND RAIN</p>

**4. SIGMET INFORMATION**

*Note 1.— In cases when, in accordance with regional air navigation agreement, SIGMET are required to be included in HF or VHF VOLMET broadcasts, every transmission of the relevant VOLMET broadcast should include the SIGMET issued for the FIR concerned and whose period of validity did not expire before the beginning of the time established for the VOLMET transmission concerned. In the case of SIGMET for tropical cyclones and volcanic ash*

cloud, the respective messages should be replaced in the transmission by notifications at least indicating that SIGMET are in force and their respective number and period of validity<sup>3</sup>. The phraseologies for such notifications are presented below. If no SIGMET is in force for the FIR concerned at the time of the beginning of the VOLMET transmission concerned, "NIL SIGMET"<sup>4</sup> is to be included in the transmission.

Note 2.— SIGMET cancellation (CNL SIGMET) should not be transmitted through relevant VOLMET broadcasts.

Note 3.— Available special air-reports, on the basis of which relevant SIGMET were not issued by the MWO concerned, should also not be transmitted through relevant VOLMET broadcasts.

Note 4.— If a SIGMET contains substantial errors in its contents and/or format, this message should not be transmitted through the relevant VOLMET broadcast. If, however, there are sufficient data available, a notification in accordance with Note 1 should be composed to replace the SIGMET in the VOLMET transmission concerned.

Note 5.— It has already been mentioned that the full content of SIGMET for tropical cyclones and volcanic ash should not be transmitted through VOLMET broadcasts. The relatively high volume of data contained in these messages and the short time periods allocated to VOLMET broadcasts should be considered as overriding reasons for this practice. It may, however, be envisaged that these messages will be transmitted to aircraft in flight in radiotelephony on the initiative of ATS personnel or in response to a request from aircraft. Section 4.1 includes formats and selected phraseologies specific to these messages which could be used to serve the purpose.

#### 4.1 SIGMET

Note.— This part does not deal with SIGMET for tropical cyclones and volcanic ash clouds. These are dealt with in 4.2.

##### Message format

First line of the message

1	2	3	4	5	6
ATS unit FIR	Message indicator	Sequence number	Period of validity	Originating MWO	Hyphen
YCCC*	SIGMET	5	VALID 221215/221600	YUDO*	—
*Fictitious location					

Second line of the message

7	8	9	10	11	12
FIR/UIR or CTA concerned	Phenomenon, description	Observed or forecast	Location level	Expected movement	Intensity change
YUCC AMSWELL* FIR	SEV TURB	OBS AT 1210Z	N OF S16 FL250	MOV E 40 KMH	WKN
*Fictitious location					

3. In some States this practice is also used for the other SIGMET messages to be included in relevant VOLMET broadcasts.

4. To be pronounced as spoken words.

13	
Forecast position of the phenomenon (excluding tropical cyclone and volcanic ash cloud) at the end of the period of validity	
Time	Position
FCST AT 1700Z	N OF S15 AND W OF E010

Input data from the SIGMET	Phraseologies		
<i>First line</i>			
<p><b>1. ATS unit serving the FIR concerned</b> location indicator</p> <p><b>2. Message indicator</b> SIGMET</p> <p><b>3. Sequence number of the message</b> a number of the message of the day, since 0000 UTC</p> <p><i>Note 1.— A sequence number may also be presented by indicating a combination of figures and letters.</i></p> <p><i>Note 2.— It is preferable to use separate series of sequence numbers and letters for SIGMET relating to various phenomena (since a new SIGMET often automatically cancels the previous SIGMET).</i></p>	<p><b>1. ATS unit serving the FIR concerned</b> not applicable</p> <p><i>Note.— This information is required primarily for data processing purposes and need not be broadcast.</i></p> <p><b>2. Message indicator</b> SIGMET</p> <p><i>Note.— SIGMET should be pronounced as a spoken word.</i></p> <p><b>3. Sequence number of the message</b> (number) or letter(s) (number)</p>		
<table border="1" style="width: 100%;"> <tr> <td style="width: 50%;"> <p>Examples (2 and 3):</p> <p>SIGMET 5 SIGMET A3</p> </td> <td style="width: 50%;"> <p>Examples (2 and 3):</p> <p>SIGMET FIVE SIGMET ALPHA THREE</p> </td> </tr> </table>		<p>Examples (2 and 3):</p> <p>SIGMET 5 SIGMET A3</p>	<p>Examples (2 and 3):</p> <p>SIGMET FIVE SIGMET ALPHA THREE</p>
<p>Examples (2 and 3):</p> <p>SIGMET 5 SIGMET A3</p>	<p>Examples (2 and 3):</p> <p>SIGMET FIVE SIGMET ALPHA THREE</p>		
<p><b>4. Period of validity</b> VALID day time/day time</p> <p><i>Note.— “Day” indicates a day of the month concerned.</i></p> <p><b>5. MWO originating the SIGMET</b> location indicator</p>	<p><b>4. Period of validity</b> VALID FROM (hours minutes) TILL (hours minutes)</p> <p><i>Note.— This information is required primarily for data processing purposes and need not be broadcast.</i></p> <p><b>5. MWO originating the SIGMET</b> not applicable</p> <p><i>Note.— This information is required primarily for data processing purposes and need not be broadcast.</i></p>		

Input data from the SIGMET	Phraseologies		
<p><b>6. Hyphen</b></p> <p><i>Note.— The hyphen indicates the end of the first line of the message.</i></p>	<p><b>6. Hyphen</b> not applicable</p> <p><i>Note.— For communications purposes only. Need not be transmitted.</i></p>		
<table border="1"> <tr> <td data-bbox="428 472 808 781"> <p>Examples (1 to 6):</p> <p>YUCC* SIGMET 5 VALID 101520/101800 YUSO*–</p> <p>YUCE* SIGMET 3 VALID 251600/252200 YUSS*</p> <p>*Fictitious location</p> </td> <td data-bbox="808 472 1192 781"> <p>Examples (1 to 6):</p> <p>SIGMET FIVE VALID FROM ONE ZERO ONE FIVE TWO ZERO TILL ONE ZERO ONE EIGHT ZERO ZERO</p> <p>SIGMET THREE VALID FROM TWO FIVE ONE SIX ZERO ZERO TILL TWO FIVE TWO TWO ZERO ZERO</p> </td> </tr> </table>		<p>Examples (1 to 6):</p> <p>YUCC* SIGMET 5 VALID 101520/101800 YUSO*–</p> <p>YUCE* SIGMET 3 VALID 251600/252200 YUSS*</p> <p>*Fictitious location</p>	<p>Examples (1 to 6):</p> <p>SIGMET FIVE VALID FROM ONE ZERO ONE FIVE TWO ZERO TILL ONE ZERO ONE EIGHT ZERO ZERO</p> <p>SIGMET THREE VALID FROM TWO FIVE ONE SIX ZERO ZERO TILL TWO FIVE TWO TWO ZERO ZERO</p>
<p>Examples (1 to 6):</p> <p>YUCC* SIGMET 5 VALID 101520/101800 YUSO*–</p> <p>YUCE* SIGMET 3 VALID 251600/252200 YUSS*</p> <p>*Fictitious location</p>	<p>Examples (1 to 6):</p> <p>SIGMET FIVE VALID FROM ONE ZERO ONE FIVE TWO ZERO TILL ONE ZERO ONE EIGHT ZERO ZERO</p> <p>SIGMET THREE VALID FROM TWO FIVE ONE SIX ZERO ZERO TILL TWO FIVE TWO TWO ZERO ZERO</p>		
<p><i>Second line</i></p>			
<p><b>7. FIR/UIR or CTA for which the SIGMET is issued</b> location indicator and name in plain language FIR or FIR/UIR or CTA</p>	<p><b>7. FIR/UIR or CTA for which the SIGMET is issued</b> (name) FIR or FIR/UIR or CTA</p> <p><i>Note.— The abbreviations should be pronounced using the individual letters in non-phonetic form.</i></p>		
<table border="1"> <tr> <td data-bbox="428 1066 808 1325"> <p>Examples (7):</p> <p>YUCC AMSWELL* FIR</p> <p>YUCD SHANLON* FIR/UIR</p> <p>YUCE DONLON* CTA</p> <p>*Fictitious location</p> </td> <td data-bbox="808 1066 1192 1325"> <p>Examples (7):</p> <p>AMSWELL* FIR</p> <p>SHANLON* FIR UIR</p> <p>DONLON* CTA</p> </td> </tr> </table>		<p>Examples (7):</p> <p>YUCC AMSWELL* FIR</p> <p>YUCD SHANLON* FIR/UIR</p> <p>YUCE DONLON* CTA</p> <p>*Fictitious location</p>	<p>Examples (7):</p> <p>AMSWELL* FIR</p> <p>SHANLON* FIR UIR</p> <p>DONLON* CTA</p>
<p>Examples (7):</p> <p>YUCC AMSWELL* FIR</p> <p>YUCD SHANLON* FIR/UIR</p> <p>YUCE DONLON* CTA</p> <p>*Fictitious location</p>	<p>Examples (7):</p> <p>AMSWELL* FIR</p> <p>SHANLON* FIR UIR</p> <p>DONLON* CTA</p>		
<p><b>8. Phenomenon and its description</b> abbreviations</p> <p><i>Note.— Table A1-3, SIGMET phenomena — abbreviations and phraseology, applies to the abbreviations.</i></p>	<p><b>8. Phenomenon and its description</b> (details)</p> <p><i>Note.— Table A1-3, SIGMET phenomena — abbreviations and phraseology, applies to the details.</i></p>		
<p><b>9. Phenomenon “observed” or “forecast”</b> OBS + AT time Z, where relevant</p> <p><i>or</i></p> <p>FCST + AT time Z, where relevant</p>	<p><b>9. Phenomenon “observed” or “forecast”</b> OBSERVED [AT] [hours minutes]</p> <p><i>or</i></p> <p>FORECAST [AT] [hours minutes]</p>		

Input data from the SIGMET	Phraseologies
<p><b>10. Location and flight level of the phenomenon</b></p> <p><b>10.1 Location</b></p> <p>a) <b>Location specified by latitude and longitude:</b> N or S latitude E or W longitude</p> <p><i>or</i></p> <p>direction OF N or S latitude E or W longitude</p> <p><i>or</i></p> <p>direction OF LINE N or S latitude E or W longitude - N or S latitude E or W longitude</p> <p><i>or</i></p> <p>WI N or S latitude E or W longitude</p> <p><i>Note 1.— Latitudes and longitudes may be indicated in degrees or degrees and minutes.</i></p> <p><i>Note 2.— The direction should be indicated in one of the eight points of the compass (N, NE, E, SE, etc.).</i></p> <p><i>Note 3.— Multiple points are given to describe enclosed area using WI.</i></p> <p>b) <b>Location specified by entire flight information region or entire control area</b> ENTIRE FIR</p> <p><i>or</i></p> <p>ENTIRE CTA</p> <p><i>Note .— Only to be used for SIGMET for volcanic ash cloud.</i></p>	<p><b>10. Location and flight level of the phenomenon</b></p> <p><b>10.1 Location</b></p> <p>a) <b>Location specified by latitude and longitude:</b> [AT] (degrees) [minutes] NORTH or SOUTH (degrees) [minutes] EAST or WEST</p> <p><i>or</i></p> <p>(direction) OF (degrees) [minutes] NORTH or SOUTH (degrees) [minutes] EAST or WEST</p> <p><i>or</i></p> <p>(direction) OF LINE (degrees) [minutes] NORTH or SOUTH (degrees) [minutes] EAST or WEST TO (degrees) [minutes] NORTH or SOUTH (degrees) [minutes] EAST or WEST</p> <p><i>or</i></p> <p>WITHIN (degrees) [minutes] NORTH or SOUTH (degrees) [minutes] EAST or WEST</p> <p><i>Note 1.— Two or four figures should be transmitted for latitudes, and three or five figures should be transmitted for longitudes.</i></p> <p><i>Note 2.— The eight points of the compass to be transmitted for the direction should be pronounced as spoken words, i.e. NORTH, NORTH-EAST, etc.</i></p> <p>b) <b>Location specified by entire flight information region or entire control area</b> ENTIRE FIR</p> <p><i>or</i></p> <p>ENTIRE CTA</p>

Input data from the SIGMET	Phraseologies
<p><b>10.2 Flight level</b> of the phenomenon FL number</p> <p><i>or</i></p> <p>ABV or BLW FL number</p> <p><i>or</i></p> <p>TOP FL number</p> <p><i>or</i></p> <p>TOP ABV or BLW FL number</p> <p><i>or</i></p> <p>FL number/number</p>	<p><b>10.2 Flight level</b> of the phenomenon FLIGHT LEVEL (number)</p> <p><i>or</i></p> <p>ABOVE or BELOW FLIGHT LEVEL (number)</p> <p><i>or</i></p> <p>TOP FLIGHT LEVEL (number)</p> <p><i>or</i></p> <p>TOP ABV or BLW FLIGHT LEVEL (number)</p> <p><i>or</i></p> <p>BETWEEN FLIGHT LEVEL (number) AND [FLIGHT LEVEL] (number)</p>
<p><b>11. Expected movement</b> of the phenomenon MOV direction speed KMH or KTS</p> <p><i>or</i></p> <p>MOV direction</p> <p><i>or</i></p> <p>STNR</p> <p><i>Note 1.— The direction should be as indicated in one of the eight points of the compass (N, NE, E, SE, etc.).</i></p> <p><i>Note 2.— This item may be omitted from a message indicating that the relevant phenomenon was observed and not forecast (see item 9).</i></p> <p><i>Note 3.— This item must be omitted if the forecast position of the phenomenon (item 13) is included.</i></p>	<p><b>11. Expected movement</b> of the phenomenon MOVING TO (direction) (number) (units)</p> <p><i>or</i></p> <p>MOVING TO (direction)</p> <p><i>or</i></p> <p>STATIONARY</p> <p><i>Note 1.— The eight points of the compass to be transmitted for the direction should be pronounced as spoken words, i.e., NORTH, NORTH-EAST, etc.</i></p> <p><i>Note 2.— Knots (kt) or metres per second (mps) should be used for speed.</i></p>

Input data from the SIGMET	Phraseologies		
<p><b>12. Change in the intensity of the phenomenon</b> INTSF or WKN or NC</p> <p><i>Note.— This item may be omitted from a message indicating that the relevant phenomenon was observed and not forecast (see item 9).</i></p> <div data-bbox="428 499 1192 1507" style="border: 1px solid black; padding: 10px; margin: 10px auto; width: 80%;"> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; vertical-align: top;"> <p>Examples (8 to 12):</p> <p>SQL TS GR OBS S OF N54 E010 TOP FL300 MOV SW WKN</p> <p>SEV TURB FCST E OF S4230 W01530 FL280/320 STNR INTSF</p> <p>SEV MTW OBS AT 1645 SE OF N45 E015 BLW FL100 STNR WKN</p> <p>SEV ICE FZRA FCST W OF N48 W075 BLW FL080 MOV E 20KT NC</p> <p>EMBD TS OBS AT 1230Z N OF S25 TOP FL310</p> </td> <td style="width: 50%; vertical-align: top;"> <p>Examples (8 to 12):</p> <p>SQUALL LINE THUNDERSTORMS WITH HAIL OBSERVED SOUTH OF FIVE FOUR NORTH ZERO ONE ZERO EAST TOPS FLIGHT LEVEL THREE ZERO ZERO MOVING TO SOUTH WEST WEAKENING</p> <p>SEVERE TURBULENCE FORECAST EAST OF FOUR TWO THREE ZERO SOUTH ZERO ONE FIVE THREE ZERO WEST BETWEEN FLIGHT LEVEL TWO EIGHT ZERO AND THREE TWO ZERO STATIONARY INTENSIFYING</p> <p>SEVERE MOUNTAIN WAVE OBSERVED AT ONE SIX FOUR FIVE SOUTH EAST OF FOUR FIVE NORTH ZERO ONE FIVE EAST BELOW FLIGHT LEVEL ONE ZERO ZERO STATIONARY WEAKENING</p> <p>SEVERE ICING IN FREEZING RAIN FORECAST WEST OF FOUR EIGHT NORTH ZERO SEVEN FIVE WEST BELOW FLIGHT LEVEL ZERO EIGHT ZERO MOVING TO EAST TWO ZERO KNOTS INTENSITY NO CHANGE</p> <p>EMBEDDED THUNDERSTORMS OBSERVED AT ONE TWO THREE ZERO [UTC] NORTH OF TWO FIVE SOUTH TOPS FLIGHT LEVEL THREE ONE ZERO</p> </td> </tr> </table> </div>	<p>Examples (8 to 12):</p> <p>SQL TS GR OBS S OF N54 E010 TOP FL300 MOV SW WKN</p> <p>SEV TURB FCST E OF S4230 W01530 FL280/320 STNR INTSF</p> <p>SEV MTW OBS AT 1645 SE OF N45 E015 BLW FL100 STNR WKN</p> <p>SEV ICE FZRA FCST W OF N48 W075 BLW FL080 MOV E 20KT NC</p> <p>EMBD TS OBS AT 1230Z N OF S25 TOP FL310</p>	<p>Examples (8 to 12):</p> <p>SQUALL LINE THUNDERSTORMS WITH HAIL OBSERVED SOUTH OF FIVE FOUR NORTH ZERO ONE ZERO EAST TOPS FLIGHT LEVEL THREE ZERO ZERO MOVING TO SOUTH WEST WEAKENING</p> <p>SEVERE TURBULENCE FORECAST EAST OF FOUR TWO THREE ZERO SOUTH ZERO ONE FIVE THREE ZERO WEST BETWEEN FLIGHT LEVEL TWO EIGHT ZERO AND THREE TWO ZERO STATIONARY INTENSIFYING</p> <p>SEVERE MOUNTAIN WAVE OBSERVED AT ONE SIX FOUR FIVE SOUTH EAST OF FOUR FIVE NORTH ZERO ONE FIVE EAST BELOW FLIGHT LEVEL ONE ZERO ZERO STATIONARY WEAKENING</p> <p>SEVERE ICING IN FREEZING RAIN FORECAST WEST OF FOUR EIGHT NORTH ZERO SEVEN FIVE WEST BELOW FLIGHT LEVEL ZERO EIGHT ZERO MOVING TO EAST TWO ZERO KNOTS INTENSITY NO CHANGE</p> <p>EMBEDDED THUNDERSTORMS OBSERVED AT ONE TWO THREE ZERO [UTC] NORTH OF TWO FIVE SOUTH TOPS FLIGHT LEVEL THREE ONE ZERO</p>	<p><b>12. Change in the intensity of the phenomenon</b> INTENSIFYING or WEAKENING or INTENSITY NO CHANGE</p>
<p>Examples (8 to 12):</p> <p>SQL TS GR OBS S OF N54 E010 TOP FL300 MOV SW WKN</p> <p>SEV TURB FCST E OF S4230 W01530 FL280/320 STNR INTSF</p> <p>SEV MTW OBS AT 1645 SE OF N45 E015 BLW FL100 STNR WKN</p> <p>SEV ICE FZRA FCST W OF N48 W075 BLW FL080 MOV E 20KT NC</p> <p>EMBD TS OBS AT 1230Z N OF S25 TOP FL310</p>	<p>Examples (8 to 12):</p> <p>SQUALL LINE THUNDERSTORMS WITH HAIL OBSERVED SOUTH OF FIVE FOUR NORTH ZERO ONE ZERO EAST TOPS FLIGHT LEVEL THREE ZERO ZERO MOVING TO SOUTH WEST WEAKENING</p> <p>SEVERE TURBULENCE FORECAST EAST OF FOUR TWO THREE ZERO SOUTH ZERO ONE FIVE THREE ZERO WEST BETWEEN FLIGHT LEVEL TWO EIGHT ZERO AND THREE TWO ZERO STATIONARY INTENSIFYING</p> <p>SEVERE MOUNTAIN WAVE OBSERVED AT ONE SIX FOUR FIVE SOUTH EAST OF FOUR FIVE NORTH ZERO ONE FIVE EAST BELOW FLIGHT LEVEL ONE ZERO ZERO STATIONARY WEAKENING</p> <p>SEVERE ICING IN FREEZING RAIN FORECAST WEST OF FOUR EIGHT NORTH ZERO SEVEN FIVE WEST BELOW FLIGHT LEVEL ZERO EIGHT ZERO MOVING TO EAST TWO ZERO KNOTS INTENSITY NO CHANGE</p> <p>EMBEDDED THUNDERSTORMS OBSERVED AT ONE TWO THREE ZERO [UTC] NORTH OF TWO FIVE SOUTH TOPS FLIGHT LEVEL THREE ONE ZERO</p>		
<p><b>13. Forecast position of phenomenon (excluding tropical cyclone and volcanic ash cloud) at end of period of validity</b></p> <p><i>Note.— For forecast position of tropical cyclone and volcanic ash cloud see 4.2 below.</i></p> <p><b>Location specified by latitude and longitude:</b> FCST AT time Z N or S latitude E or W longitude</p> <p style="text-align: center;"><i>or</i></p>	<p><b>13. Forecast position of phenomenon (excluding tropical cyclone and volcanic ash cloud) at end of period of validity</b></p> <p><b>Location specified by latitude and longitude:</b> FORECAST AT (hours minutes) [UTC] [AT] (degrees) [minutes] NORTH or SOUTH (degrees) [minutes] EAST or WEST</p> <p style="text-align: center;"><i>or</i></p>		



Input data from the SIGMET	Phraseologies										
<p>FCST AT time Z direction OF N or S latitude E or W longitude</p> <p>or</p> <p>FCST AT time Z direction OF LINE N or S latitude E or W longitude - N or S latitude E or W longitude</p> <p>or</p> <p>FCST AT time Z WI N or S latitude E or W longitude</p> <p><i>Note 1.— Latitudes and longitudes may be indicated in degrees or degrees and minutes.</i></p> <p><i>Note 2.— The direction should be indicated in one of the eight points of the compass (N, NE, E, SE, etc.).</i></p> <p><i>Note 3.— Multiple points are given to describe enclosed area using WI.</i></p>	<p>FORECAST AT (hours minutes) [UTC] (direction) OF (degrees) [minutes] NORTH or SOUTH (degrees) [minutes] EAST or WEST</p> <p>or</p> <p>FORECAST AT (hours minutes) [UTC] WITHIN (degrees) [minutes] NORTH or SOUTH (degrees) [minutes] EAST or WEST</p> <p><i>Note 1.— Two or four figures should be transmitted for latitudes, and three or five figures should be transmitted for longitudes.</i></p> <p><i>Note 2.— The eight points of the compass to be transmitted for the direction should be pronounced as spoken words, i.e. NORTH, NORTH-EAST, etc.</i></p>										
<table border="1"> <thead> <tr> <th data-bbox="436 888 808 905">Examples:</th> <th data-bbox="815 888 1192 905">Examples:</th> </tr> </thead> <tbody> <tr> <td data-bbox="436 936 808 953">FCST AT 0200Z N5045 W04015</td> <td data-bbox="815 936 1192 1037">FORECAST AT ZERO TWO ZERO ZERO [UTC] FIVE ZERO FOUR FIVE NORTH ZERO FOUR ZERO ONE FIVE WEST</td> </tr> <tr> <td data-bbox="436 1068 808 1085">FCST AT 1600Z W OF E01230</td> <td data-bbox="815 1068 1192 1144">FORECAST AT ONE SIX ZERO ZERO [UTC] WEST OF ZERO ONE TWO THREE ZERO EAST</td> </tr> <tr> <td data-bbox="436 1176 808 1226">FCST AT 1030Z SE OF LINE N70 E110 – N75 E120</td> <td data-bbox="815 1176 1192 1306">FORECAST AT ONE ZERO THREE ZERO [UTC] SOUTH EAST OF LINE SEVEN ZERO NORTH ONE ONE ZERO EAST TO SEVEN FIVE NORTH ONE TWO ZERO EAST</td> </tr> <tr> <td data-bbox="436 1337 808 1388">FCST AT 2300Z WI N60 W160 – N60 W140 – N50 W140 – N50 W160</td> <td data-bbox="815 1337 1192 1514">FORECAST AT TWO THREE ZERO ZERO [UTC] WITHIN SIX ZERO NORTH ONE SIX ZERO WEST TO SIX ZERO NORTH ONE FOUR ZERO WEST TO FIVE ZERO NORTH ONE FOUR ZERO WEST TO FIVE ZERO NORTH ONE SIX ZERO WEST</td> </tr> </tbody> </table>		Examples:	Examples:	FCST AT 0200Z N5045 W04015	FORECAST AT ZERO TWO ZERO ZERO [UTC] FIVE ZERO FOUR FIVE NORTH ZERO FOUR ZERO ONE FIVE WEST	FCST AT 1600Z W OF E01230	FORECAST AT ONE SIX ZERO ZERO [UTC] WEST OF ZERO ONE TWO THREE ZERO EAST	FCST AT 1030Z SE OF LINE N70 E110 – N75 E120	FORECAST AT ONE ZERO THREE ZERO [UTC] SOUTH EAST OF LINE SEVEN ZERO NORTH ONE ONE ZERO EAST TO SEVEN FIVE NORTH ONE TWO ZERO EAST	FCST AT 2300Z WI N60 W160 – N60 W140 – N50 W140 – N50 W160	FORECAST AT TWO THREE ZERO ZERO [UTC] WITHIN SIX ZERO NORTH ONE SIX ZERO WEST TO SIX ZERO NORTH ONE FOUR ZERO WEST TO FIVE ZERO NORTH ONE FOUR ZERO WEST TO FIVE ZERO NORTH ONE SIX ZERO WEST
Examples:	Examples:										
FCST AT 0200Z N5045 W04015	FORECAST AT ZERO TWO ZERO ZERO [UTC] FIVE ZERO FOUR FIVE NORTH ZERO FOUR ZERO ONE FIVE WEST										
FCST AT 1600Z W OF E01230	FORECAST AT ONE SIX ZERO ZERO [UTC] WEST OF ZERO ONE TWO THREE ZERO EAST										
FCST AT 1030Z SE OF LINE N70 E110 – N75 E120	FORECAST AT ONE ZERO THREE ZERO [UTC] SOUTH EAST OF LINE SEVEN ZERO NORTH ONE ONE ZERO EAST TO SEVEN FIVE NORTH ONE TWO ZERO EAST										
FCST AT 2300Z WI N60 W160 – N60 W140 – N50 W140 – N50 W160	FORECAST AT TWO THREE ZERO ZERO [UTC] WITHIN SIX ZERO NORTH ONE SIX ZERO WEST TO SIX ZERO NORTH ONE FOUR ZERO WEST TO FIVE ZERO NORTH ONE FOUR ZERO WEST TO FIVE ZERO NORTH ONE SIX ZERO WEST										

**Notification of a SIGMET message****Phraseologies**

SIGMET (sequence number) (name) FIR or FIR/UIR or CTA VALID FROM (hours minutes) TILL (hours minutes) [FOR] [details].

*Note 1.— Items 2, 3 and 4 above apply to the phraseologies in the initial part of the notification.*

*Note 2.— [TROPICAL CYCLONE + name] and [VOLCANIC ASH CLOUD], respectively, should be included for the details in the notifications concerning SIGMET for tropical cyclones and volcanic ash cloud (dealt with in 4.2). If the notifications are used to replace other SIGMET in relevant VOLMET transmissions, Table A1-3 applies to the details.*

**Examples:**

SIGMET 5 SHANLON\* FIR UIR VALID FROM TWO THREE FOUR FIVE  
TILL ZERO THREE FOUR FIVE  
SIGMET 2 AMSWELL FIR\* VALID FROM ONE EIGHT ONE FIVE TILL TWO  
TWO ZERO ZERO FOR SEVERE TURBULENCE  
SIGMET 1 AMSWELL FIR\* VALID FROM ZERO ZERO THREE ZERO TILL  
ONE SIX ZERO ZERO FOR [VOLCANIC] ASH CLOUD  
SIGMET 3 DONLON FIR\* VALID FROM ZERO SIX ZERO ZERO TILL ONE  
TWO ZERO ZERO FOR TROPICAL CYCLONE GLORIA

\*Fictitious location

**4.2 SIGMET for tropical cyclones and volcanic ash cloud**

*Note 1.— The structure and content (input data) of SIGMET for tropical cyclones and volcanic ash cloud differ slightly from the SIGMET dealt with in 4.1. Both SIGMET for tropical cyclones and SIGMET for volcanic ash cloud comprise two sections. The first section of the messages is identical to the same section in the SIGMET dealt with in 4.1. A second section of the messages, beginning on the second line of the SIGMET for tropical cyclones and volcanic ash may be expanded for the specific purposes of these SIGMET.*

*Note 2.— In view of the fact that the full text of these messages cannot be broadcast by means of VOLMET, the following examples of phraseologies are intended for use whenever these messages, or portions thereof, are to be transmitted in radiotelephony to aircraft in flight.*

**SIGMET for tropical cyclones****Message format**

*First line of the message*

1	2	3	4	5	6
ATS/MET unit FIR	Message indicator	Sequence number	Period of validity	Originating MWO	Hyphen
YYCC*	SIGMET	3	VALID 251600/252200	YUDO*	—

\*Fictitious location

## Second line of the message

7	8	9	10	11
FIR/UIR or CTA	Phenomenon + name	Observed		Extent
		Position	Time	
YYCC AMSWELL FIR*	TC GLORIA	PSN N2706 W07306 CB	OBS AT 1600Z	WI 280KM OF TC CENTRE TOP FL500
*Fictitious location				

12	13	14
Expected movement	Intensity change	Forecast of the centre position at the end of the validity period
MOV NW 10KT	NC	FCST AT 2200Z TC CENTRE PSN N2750 W07400

Example (7 to 11 and 13 to 14):

AMSWELL\* FIR TROPICAL CYCLONE GLORIA AT TWO SEVEN ZERO SIX NORTH ZERO SEVEN THREE ZERO SIX WEST, CB OBSERVED AT ONE SIX ZERO ZERO [UTC] WITHIN TWO EIGHT ZERO KILOMETRES OF CENTRE WITH TOP FLIGHT LEVEL FIVE ZERO ZERO, NO CHANGE IN INTENSITY, FORECAST AT TWO TWO ZERO ZERO [UTC] CENTRE POSITION TWO SEVEN FIVE ZERO NORTH ZERO SEVEN FOUR ZERO ZERO WEST

Example (7 to 13):

AMSWELL\* FIR TROPICAL CYCLONE GLORIA AT TWO SEVEN ZERO SIX NORTH ZERO SEVEN THREE ZERO SIX WEST, CB OBSERVED AT ONE SIX ZERO ZERO [UTC] WITHIN TWO EIGHT ZERO KILOMETRES OF CENTRE WITH TOP FLIGHT LEVEL FIVE ZERO ZERO, MOVING [TO] NORTHWEST ONE ZERO KNOTS, NO CHANGE IN INTENSITY

\*Fictitious location

*Note 1.— SIGMET for a tropical cyclone should include either the forecast position of the tropical cyclone centre at the end of the period of validity, i.e. normally six hours later (item 14) or the expected movement (item 12), not both of them.*

*Note 2.— Depending on the input data, the phraseologies for latitudes and longitudes may include two or four figures for latitudes and three or five figures for longitudes.*

*Note 3.— For phraseologies relating to items 1 to 6, see 4.1.*

**SIGMET for volcanic ash cloud****Message format***First line of the message*

1	2	3	4	5	6
ATS unit FIR	Message indicator	Sequence number	Period of validity	Originating MWO	Hyphen
YYDD*	SIGMET	2	VALID 211100/211700	YOSO*	—
*Fictitious location					

*Second line of the message*

7	8			9
FIR/UIR or CTA	Volcano			Volcanic ash cloud observed
	Phenomenon	Name	Location	
YYDD AMSWELL FIR*	VA	ERUPTION MT ASHVAL	PSN S1500 E07348	VA CLD OBS AT 1100Z
*Fictitious location				

10		11	12
Extent of the cloud		Expected movement	Intensity change
Horizontal	Vertical		
APRX 50KM WID LINE BTN S1500 E07348 — S1530 E07642	FL310/450	MOV ESE 65 KMH	INTSE

13	
Volcanic ash cloud forecast at the end of the period of validity	
Time	Position
FCST AT 1700Z	APRX 50KM WID LINE BTN S1506 E07500 — S1518 E08112 — S1712 E08330  or  ENTIRE FIR[UIR]  or  ENTIRE CTA  or  NO VA EXP

Example (7 to 12):

AMSWELL\* FIR VOLCANIC ASH ERUPTION MOUNT ASHVAL AT ONE FIVE ZERO ZERO SOUTH ZERO SEVEN THREE FOUR EIGHT EAST, ASH CLOUD OBSERVED AT ONE ONE ZERO ZERO [UTC] IN 50 KILOMETRE WIDE LINE BETWEEN ONE FIVE ZERO ZERO SOUTH ZERO SEVEN THREE FOUR EIGHT EAST AND ... see Note 1 ..., BETWEEN FLIGHT LEVELS THREE ONE ZERO AND FOUR FIVE ZERO, MOVING [TO] EAST SOUTH EAST SIX FIVE KILOMETRES PER HOUR, INTENSIFYING

\*Fictitious location

Examples (13):

FORECAST AT ONE SEVEN ZERO ZERO [UTC] ASH CLOUD POSITION ONE FIVE ZERO SIX SOUTH ZERO SEVEN FIVE ZERO ZERO EAST TO ... see Note 1 ...

FORECAST AT ONE SEVEN ZERO ZERO [UTC] ENTIRE FIR

FORECAST AT ONE SEVEN ZERO ZERO [UTC] ENTIRE CTA

FORECAST AT ONE SEVEN ZERO ZERO [UTC] NO VOLCANIC ASH EXPECTED

*Note 1.— Up to seven points specified by a latitude and a longitude delineate the horizontal extent, i.e. "POSITION" of a volcanic ash cloud. "—" separates the individual points.*

*Note 2.— Depending on the input data, the phraseologies for latitudes and longitudes may include two or four figures for latitudes and three or five figures for longitudes.*

*Note 3.— SIGMET for volcanic ash cloud should include either the forecast position of the volcanic ash cloud concerned at the end of the period of validity, i.e. normally six hours later (item 13) or the expected movement (item 11), not both of them.*

*Note 4.— If the name and location of the volcano are not known, item 8 may be omitted.*

*Note 5.— For phraseologies relating to items 1 to 6, see 4.1.*

Table A1-1. Present weather (w'w') decoding and phraseology

w'w' abbreviations, indicators and phraseology			
Intensity (1)	Proximity (2)	Characteristic (3)	w'w' phenomena (4)
–  (no indicator)	LIGHT*	VC IN VICINITY***	BC FOG PATCHES
	MODERATE*		BL BLOWING
+	HEAVY* or WELL DEVELOPED**	AERODROME PARTIALLY COVERED BY FOG	DR LOW DRIFTING
			FZ FREEZING
			<b>DZ DRIZZLE</b>
			FC FUNNEL CLOUD
			FG FOG
			FU SMOKE
			<b>GR HAIL</b>
			<b>GS SMALL HAIL</b>
			HZ HAZE
			<b>PL ICE PELLETS</b>
			PO DUST WHIRLS
			<b>RA RAIN</b>
			SA SAND
			<b>SG SNOW GRAINS</b>
			<b>SN SNOW</b>
			SQ SQUALL
			SS SANDSTORM
			<b>UP UNIDENTIFIED PRECIPITATION</b>
			VA VOLCANIC ASH
<i>Note.— Bold denotes precipitation.</i>			
* Used with precipitation (see column 4) DS, SS, SH, TS.			
** Applies to +FC +PO.			
*** Used with BLDU, BLSA, BLSN, DS, FG, FC, PO, SS, SH, TS, VA. No intensity is reported or transmitted in these cases, and no precipitation is reported or transmitted for SH, TS.			

Table A1-2. Forecast weather (w'w') decoding and phraseology

[intensity] [characteristics] w'w' phenomena	Phraseology
<b>+ or no indication [characteristic] w'w' phenomena</b>	HEAVY or MODERATE [characteristic] w'w' phenomena
DZ; RA; SN; SG; PL; and suitable combinations thereof	DRIZZLE; RAIN; SNOW; SNOW GRAINS; ICE PELLETS; and suitable combinations thereof
SHRA; SHSN; SHGR; SHGS; and suitable combinations thereof	RAIN SHOWERS; SNOW SHOWERS; HAIL SHOWERS; SMALL HAIL SHOWERS; and suitable combinations thereof
<b>+ or no indication or – [characteristic] w'w' phenomena</b>	HEAVY or MODERATE or LIGHT [characteristic] w'w' phenomena
TSRA TSSN; TSGR; TSGS; and suitable combinations thereof	THUNDERSTORM WITH RAIN; THUNDERSTORM WITH SNOW; THUNDERSTORM WITH HAIL; THUNDERSTORM WITH SMALL HAIL; and suitable combinations thereof
FZRA; FZDZ; and suitable combinations thereof	FREEZING RAIN; FREEZING DRIZZLE; and suitable combinations thereof
DS; SS	DUSTSTORM; SANDSTORM
<b>[characteristic] w'w' phenomena</b>	<b>[characteristic] w'w' phenomena</b>
TS; SQ  FG; FZFG MIFG; BCFG PRFG  BLSN; BLDU; BLSA  FC; PO	THUNDERSTORM WITHOUT PRECIPITATION; SQUALL  FOG; FREEZING FOG SHALLOW FOG; FOG PATCHES AERODROME PARTIALLY COVERED BY FOG  BLOWING SNOW; BLOWING DUST; BLOWING SAND  FUNNEL CLOUD*; DUST WHIRLS*
BR HZ**; DU**, SA**, FU**, VA**	MIST HAZE; DUST; SAND; SMOKE; VOLCANIC ASH
DRSN; DRDU; DRSA	LOW DRIFTING SNOW; LOW DRIFTING DUST; LOW DRIFTING SAND
<p>* +FC and +PO should be broadcast as WELL-DEVELOPED FUNNEL CLOUD and WELL-DEVELOPED DUST WHIRLS.</p> <p>** These phenomena are forecast if they are expected to significantly affect visibility.</p>	

**Table A1-3. SIGMET phenomena — abbreviations and phraseology**

<b>Phenomena in SIGMET</b>	
<b>Abbreviations (phenomena, description)</b>	<b>Phraseology</b>
OBSC TS EMBD TS FRQ TS SQL TS OBSC TSGR EMBD TSGR FRQ TSGR SQL TSGR	OBSCURED THUNDERSTORMS EMBEDDED THUNDERSTORMS FREQUENT THUNDERSTORMS SQUALL LINE THUNDERSTORMS OBSCURED THUNDERSTORMS WITH HAIL EMBEDDED THUNDERSTORMS WITH HAIL FREQUENT THUNDERSTORMS WITH HAIL SQUALL LINE THUNDERSTORMS WITH HAIL
TC + cyclone name	TROPICAL CYCLONE (name)
SEV TURB SEV ICE SEV ICE FZRA SEV MTW HVY DS HVY SS VA CLD RDOACT CLD	SEVERE TURBULENCE SEVERE ICING SEVERE ICING IN FREEZING RAIN SEVERE MOUNTAIN WAVE HEAVY DUSTSTORM HEAVY SANDSTORM VOLCANIC ASH CLOUD RADIOACTIVE CLOUD

*Note 1.— SIGMET information concerning thunderstorms and tropical cyclones should not include reference to associated turbulence and icing.*

*Note 2.— Only one of the phenomena shown in the table is to be indicated in a SIGMET.*



## Appendix 2

# SAMPLE LETTER OF AGREEMENT BETWEEN THE ATS AND METEOROLOGICAL AUTHORITIES

### Directives for the coordination between ATS and the meteorological offices and stations and responsibility for the provision of meteorological service for international and national air navigation

Effective date: .....

#### 1. OBJECTIVE

1.1 The objective of this Letter of Agreement between [the ATS authority]<sup>1</sup> and [the meteorological authority]<sup>2</sup> is to establish the directives for the necessary coordination between ATS units and meteorological offices and stations to ensure the provision of the meteorological service required for civil (international and national) air navigation, in accordance with international agreements (see 1.4) and [national air navigation regulatory documents].

1.2 This Letter of Agreement also specifies the responsibility of ATS units in relation to the transmission to meteorological offices and stations of air-reports and other meteorological information obtained from aircraft in flight or resulting from observations made by ATS personnel at aerodromes.

1.3 This Letter of Agreement also includes the responsibilities of ATS units and meteorological offices and stations in relation to the mutual exchange of information on pre-eruption volcanic activity, volcanic eruptions and volcanic ash cloud, and information on the release into the atmosphere of radioactive materials and toxic chemicals [if applicable].

1.4 The directives detailed in this Letter of Agreement are in accordance with the Standards and Recommended Practices and Procedures of ICAO, contained in Annex 3 — *Meteorological Service for International Air Navigation*, Annex 11 — *Air Traffic Services*, Annex 12 — *Search and Rescue*, Annex 15 — *Aeronautical Information Services* and the *Procedures for Air Navigation Services — Air Traffic Management* (PANS-ATM, Doc 4444), and the *Procedures for Air Navigation Services — Aeronautical Information Management* (PANS-AIM, Doc 10066), as well as the provisions contained in the *Regional Supplementary Procedures* (Doc 7030), relevant regional air navigation plans and in the aeronautical information publication of [name of State] (AIP-[name of State]). These directives are also based on the guidance material in the *Manual on Coordination between Air Traffic Services, Aeronautical Information Services and Aeronautical Meteorological Services* (Doc 9377), the *Aeronautical Information Services Manual* (Doc 8126) and the *Handbook on the International Airways Volcano Watch (IAVW) — Operational Procedures and Contact List* (Doc 9766).

1.5 This Letter of Agreement includes .....<sup>3</sup> annexes, including detailed directives and arrangements pertaining to individual aerodromes and to ATS units and meteorological offices not located at aerodromes.

- 
1. Name of the ATS authority.
  2. Name of the meteorological authority.
  3. Number of annexes agreed upon by the two parties to the Letter of Agreement.

## 2. REVISIONS

2.1 When, for special or unforeseen reasons, a significant change in the coordination between the two parties involved or the services mentioned in this Letter of Agreement becomes necessary, the respective officers-in-charge, through mutual agreement, may effect temporary changes or amendments, provided that these changes are not intended to last more than .....<sup>4</sup> days.

2.2 Permanent revisions to this Letter of Agreement may be made by the authorities who approve and sign this agreement. A complete cancellation of this Letter of Agreement may be made, in writing, by the parties to the agreement within a notice period of .....<sup>5</sup> days.

## 3. GENERAL

3.1 The objective of meteorological service is to contribute to the safety, regularity and efficiency of civil air navigation.

3.2 [The meteorological authority] has responsibility for executing and coordinating activities to meet the meteorological requirements necessary for civil air navigation in [the State concerned].

3.3 On the basis of the decision [reference] by [the State concerned], [the meteorological authority] establishes an adequate number of meteorological offices and stations to meet the relevant requirements for the provision of meteorological service for civil air navigation.

3.4 The aeronautical meteorological service provided by these offices and stations to ATS units comprises:

- a) aeronautical meteorological stations making routine and special observations and issuing local routine reports, local special reports, METAR and SPECI. In addition, these stations make non-routine observations and prepare volcanic activity reports [if applicable];
- b) aerodrome meteorological offices and/or aeronautical meteorological stations providing forecasts for aerodromes (such as TAF and trend forecasts, relevant warnings for aerodromes and their vicinity), as well as forecasts of en-route weather conditions, meteorological consultation, flight briefings and documentation; and
- c) a meteorological watch office (the ..... MWO), providing meteorological watch for the ..... FIR/UIR established in [the State concerned], including the preparation, issuance and dissemination of SIGMET information and AIRMET information [if applicable] concerning specified en-route weather and other phenomena in the atmosphere that may affect the safety of aircraft operations.

3.5 The objectives of ATS are to:

- a) prevent collisions between aircraft in the air or on the manoeuvring area of an aerodrome;
- b) prevent collisions between aircraft on the manoeuvring area and obstructions on that area;
- c) expedite and maintain an orderly flow of air traffic;

---

4. Figure to be agreed upon locally; six days appears to be a suitable period.

5. Figure to be agreed locally; 180 days appears to be a suitable period.

- d) provide advice and information useful for the safe and efficient conduct of flights; and
  - e) notify appropriate organizations regarding aircraft in need of search and rescue aid and assist such organizations as required.
- 3.6 ATS comprises three services, as follows:
- a) air traffic control service;
  - b) flight information service; and
  - c) alerting service.
- 3.7 The air traffic control service includes the provision of:
- a) air traffic control service for controlled flights, except for those parts of such flights provided within the approach control service and the aerodrome control service;
  - b) approach control service to that portion of controlled flights associated with the arrival of an aircraft at, or its departure from, the various controlled aerodromes; and
  - c) aerodrome control service for aerodrome traffic, except for those parts of flights provided within approach control service.
- 3.8 The flight information service provides advice and information useful for the safe and efficient conduct of flights.
- 3.9 The alerting service notifies the appropriate organizations regarding aircraft in need of search and rescue aid and assists such organizations as required.

*Note.— The established FIR/UIR and control area<sup>6</sup> and the related ACC/FIC, as well as the established TWRs and APPs, are given in the AIP, GEN 3.3, of [the State concerned].*

## 4. RESPONSIBILITIES

### 4.1 General

In order to provide an efficient air traffic service and in view of the fact that the ATS units are an important factor in the liaison between aircraft in flight and the meteorological offices and stations, [the meteorological authority] and [the ATS authority] will collaborate to ensure fast and efficient coordination.

---

6. It is assumed that the State concerned has established in its airspace one FIR/UIR and one control area within the FIR/UIR. The required ATS is provided from one ACC/FIC which is served by one MWO.

## 4.2 Responsibilities of [the meteorological authority] and the meteorological offices and stations

### General

4.2.1 [The meteorological authority], through the meteorological offices and stations listed in Table A2-1, is responsible for the provision of up-to-date information on existing and forecast meteorological conditions to those ATS units that need it in order to carry out their functions. The necessary meteorological information will be supplied to individual ATS units from the associated meteorological offices and relevant aeronautical meteorological stations at aerodromes. Table A2-2 provides a list of the associated meteorological offices designated by [the meteorological authority] to serve individual ATS units and rescue coordination centres and sub-centres.

4.2.2 Aerodrome meteorological offices will be located, or suitable arrangements will be made, so that meteorological briefings for ATS personnel, as well as consultations between meteorological and ATS personnel, are facilitated and fast and reliable communications are established in order to effect coordination in the most efficient manner possible.

4.2.3 The meteorological information provided will, as far as possible, be in a format that facilitates easy interpretation by ATS personnel, and the frequency of meteorological reports, forecasts, warnings, etc., will cover the needs of each of the ATS units. Table A2-3 provides a list of meteorological information to be supplied to ATS units, its format and the frequency with which it is to be supplied to individual ATS units.

4.2.4 In providing local reports and current altimeter setting information to ATS units at aerodromes, consideration will be given to the type and volume of air traffic and the availability of meteorological instruments/displays and/or automated observing system displays in the units concerned.

**Table A2-1. List of meteorological offices and aeronautical meteorological stations providing meteorological service to civil aviation**

<i>Office</i>	<i>Located at</i>	<i>Location indicator</i>
Aerodrome meteorological office	Donlon International Aerodrome	YUDL
Aerodrome meteorological office	Kental Aerodrome	YUDK
Meteorological watch office	Donlon (City)	YUDD
<i>Aeronautical meteorological station at</i>		<i>Location indicator</i>
Donlon International		YUDL
Donlon West		YUDW
Biggin		YUDB
Gales		YUDG
Kental		YUDK
Tursa		YUDT

*Note.— All names, locations and location indicators are fictitious.*

**Table A2-2. Designation of meteorological offices associated with individual ATS units and search and rescue services centres**

<i>Aerodrome</i>	<i>ATS unit</i>	<i>Meteorological office associated with the ATS unit</i>
Donlon International	TWR	Donlon International
Donlon International	APP	Donlon International
Donlon West	TWR	Donlon International
Biggin	TWR	Donlon International
Biggin	APP	Donlon International
Gales	TWR	Donlon International
Kental	TWR	Kental
Kental	APP	Kental
Tursa	TWR	Kental
—	ACC/FIC Donlon	MWO Donlon
—	RCC/RCS Donlon	MWO Donlon

*Note.— All locations are fictitious.*

4.2.5 Detailed information on the location, vertical extent, direction and speed of movement of significant meteorological phenomena in the proximity of aerodromes, which may present a danger to aircraft operations, particularly in the areas of the initial climb-out and approach, will be provided to the appropriate ATS units with the utmost speed. This information will be derived from weather radar observations, remote-sensing equipment and meteorological satellite data available in [the meteorological authority].

4.2.6 Meteorological offices and/or aeronautical meteorological stations will provide other information as agreed locally concerning, for example, surface wind, rapid deterioration of weather conditions or sudden fluctuations of temperatures that could adversely affect the operation of certain types of aircraft, either en route or on take-off and landing.

4.2.7 Aerodrome meteorological offices will provide the meteorological information needed to meet non-routine requests from aircraft in flight (e.g. requests from distant aerodromes for meteorological reports).

4.2.8 Computer-processed meteorological information in digital form will be provided to ATS computerized centres in accordance with the arrangements agreed between [the meteorological authority] and [the ATS authority] concerning its content, format and transmission. Details of these arrangements are specified in [relevant annexes to this Letter of Agreement].

4.2.9 Copies of meteorological flight documentation supplied to flight crews will be kept for a period of at least 30 days (i.e. stored as hard copies or in computer memory), from the date of issue and will be made available on request for inquiries or investigations and, for these purposes, will be retained until the inquiry or investigation is completed.

**Table A2-3. Aeronautical meteorological information supplied to ATS units**

<i>Information</i>	<i>Distributor</i>	<i>Destination</i>	<i>Frequency</i>	<i>Communications means</i>
METAR and local routine reports with trend forecast*, as required	Aeronautical MET station [trend forecast prepared by MET office]	TWR APP ACC FIC COM station	Hourly**	See Note 1 See Note 1 See Note 1 See Note 1 See Note 2
SPECI and local special reports with trend forecast*, as required	Aeronautical MET station [trend forecast prepared by MET office]	TWR APP ACC FIC COM station	When warranted	See Note 1 See Note 1 See Note 2 See Note 2 See Note 2
TAF	Aerodrome MET office	TWR APP ACC FIC COM station	Every 3 or 6 hours	See Note 1 See Note 1 See Note 1 or 2 See Note 1 or 2 See Note 2
Aerodrome warnings	Aerodrome MET office	TWR APP COM station Aerodrome services	When warranted	See Note 1 See Note 1 or 2 See Note 2
Upper wind and temperature forecasts	Aerodrome MET office and/or MWO (data to be obtained through the WAFS)	ACC FIC	Every 6 hours (if required)	See Note 2 See Note 2
Significant en-route weather forecast	Aerodrome MET office and/or MWO (data to be obtained through the WAFS)	ACC FIC	Every 6 hours	See Note 2
SIGMET and AIRMET	MWO	TWR APP ACC FIC COM station	When warranted	See Note 1 See Notes 1 and 2 See Notes 1 and 2 See Notes 1 and 2 See Note 2
Wind shear warnings and alerts	Aerodrome MET office	TWR APP	When warranted	See Note 1 See Note 1
Tropical cyclone advisory	TCAC/MWO	ACC FIC	When warranted	See Notes 1 and 2
Volcanic ash advisory	VAAC/MWO	ACC FIC	When warranted	See Notes 1 and 2
Information on release of radioactive material, i.e. location of the release and forecast trajectories of the radioactive material	MWO (normally, the information obtained from the WMO RSMC concerned) VAAC London (focal point)	ACC FIC	When warranted	See Notes 1 and 2
Information on volcanic eruptions and volcanic ash for which a SIGMET has not yet been issued.	MWO VAAC	TWR APP ACC FIC	When warranted	

\* Trends to be added to local reports and METAR/SPECI for those stations so identified in the air navigation plan.

\*\* Or half-hourly if so decided by regional air navigation agreement.

*Note 1.— Communications by intranet, video display unit or similar. If none of these are available, or during unavailability periods, communications by phone, followed if possible by confirmation by other means.*

*Note 2.— Communications by teleprinter or by Internet for non-time-critical operational meteorological information.*

4.2.10 Aeronautical climatological information (i.e. in particular, aerodrome climatological tables and summaries) will be provided to [the ATS authority] as agreed between the two parties to this Letter of Agreement.

#### **Information for aerodrome control towers (TWRs)**

4.2.11 Up-to-date local reports with trend forecasts, including current pressure data for the setting of altimeters, and TAF, related to the aerodrome concerned, will be provided to the aerodrome control tower of each aerodrome.

4.2.12 Local special reports with trend forecasts, including current pressure data for the setting of altimeters, issued in accordance with Annex 3, Chapter 4, 4.4, and the list of criteria for special observations referred to in Annex 3, Appendix 3, 2.3, and amendments to TAF will be communicated to the TWR in accordance with locally established procedures as soon as they are issued, i.e. without waiting for the next local routine report or forecast.

4.2.13 Aerodrome warnings issued in accordance with Annex 3, Chapter 7, 7.3 and Appendix 6, 5 and 6, and the list of criteria used for the issuance of these warnings in Annex 3, Appendix 6, 5.2, wind shear warnings and alerts and relevant SIGMET information and AIRMET information [if appropriate] will be communicated to the TWR without delay.

4.2.14 TWRs will be equipped with displays for surface wind and runway visual range (RVR), [other meteorological elements/phenomena, as appropriate]. The displays will relate to the same points of observation and will obtain data from the same sensors as those to which the corresponding displays in the aeronautical meteorological station are connected.

4.2.15 Local special reports will not be issued for changes in values of meteorological elements displayed continuously at TWRs (as per 4.2.14).

4.2.16 Information received on pre-eruption volcanic activity, volcanic eruptions and volcanic ash cloud, for which SIGMET information has not been issued, will be communicated to individual TWRs by their associated meteorological watch offices [if applicable].

*Note.— Annexes ..... to this Letter of Agreement include detailed arrangements relating to TWRs at [list of aerodromes].*

#### **Information for APPs**

4.2.17 Up-to-date local reports with trend forecasts, including current pressure data for the setting of altimeters, and TAF related to the aerodromes concerned will be provided to the ATS units that provide approach control services.

4.2.18 Local special reports with trend forecasts, including current pressure data for the setting of altimeters, and amendments to TAF will be communicated to APPs, in accordance with locally established procedures, as soon as they are issued (i.e. without waiting for the next local routine report or forecast).

4.2.19 Relevant SIGMET information and appropriate special air-reports, AIRMET information [if appropriate], aerodrome warnings and wind shear warnings and alerts will be provided to APPs without delay.

4.2.20 APPs providing the service for final approach, landing and take-off will be equipped with displays for surface wind, RVR and atmospheric pressure, [other meteorological elements/phenomena, as appropriate]. The displays will relate to the same points of observation and will obtain data from the same sensors as those to which the corresponding displays in the meteorological station are connected.

4.2.21 Local special reports will not be issued for changes in values of meteorological elements displayed continuously at APPs (as per 4.2.20).

4.2.22 Information received on pre-eruption volcanic activity, volcanic eruptions and volcanic ash cloud, for which SIGMET information has not been issued, will be communicated to individual APPs by their associated meteorological offices [if applicable].

*Note.— Annexes ..... to this Letter of Agreement include detailed arrangements relating to APPs at [APP's location or location indicators].*

**Information for the [location or location indicators]  
area control centre/flight information centre (ACC/FIC)**

4.2.23 Up-to-date routine and special reports (METAR and SPECI with trend forecasts) and TAF related to aerodromes located within the ..... FIR/UIR, as well as other forecasts for the airspace for which the ..... ACCs/FICs are responsible, will be provided to these centres, giving special emphasis to significant meteorological conditions and weather deterioration occurring, as soon as it can be determined. Such reports and forecasts will also relate to all other areas that may be determined in accordance with regional air navigation agreement.

4.2.24 SIGMET information and appropriate special air-reports and AIRMET information [if appropriate] pertaining to the ..... FIR/UIR, and also to those FIRs/UIRs or portions of FIRs/UIRs which lie within two hours' flying time from the boundaries of the ..... FIR/UIR, will be provided to the ..... ACC/FIC.

4.2.25 Current pressure data for setting altimeters [e.g. the lowest QNH in the FIR/control area specified by the ACC/FIC] will be provided to the ..... ACC/FIC to be available for low-level flight operations.

4.2.26 Information received on pre-eruption volcanic activity, volcanic eruptions and volcanic ash cloud, for which SIGMET information has not been issued, will be communicated to the ..... ACC/FIC by the ..... MWO [if applicable].

4.2.27 Volcanic ash advisories will be communicated to the ..... ACC/FIC in accordance with regional air navigation agreement.

4.2.28 Information received from [the designated national and/or international sources] concerning the release into the atmosphere of radioactive materials and toxic chemicals will be communicated to the ..... ACC/FIC by the ..... MWO.

*Note.— Annex ..... to this Letter of Agreement includes detailed arrangements relating to the ..... ACC/FIC.*

### 4.3 Responsibilities of [the ATS authority] and ATS units

4.3.1 [The ATS authority] makes the necessary arrangements for ATS units to:

- a) transmit special air-reports received by voice communications to the ..... MWO;
- b) automatically transmit routine air-reports by data link communications to WAFCS London and Washington and ..... MWO;



- c) automatically transmit special air-reports received by data link communications to the ..... MWO, and WAFCs London and Washington.

The special air-reports will be transmitted without delay and the routine air-reports will be transmitted as soon as practicable.

4.3.2 Reports of non-routine observations from aircraft in flight (Annex 3, 5.6 refers) will be transmitted without delay to the ..... MWO and meteorological offices and stations concerned. (Annex 11, 2.20.1 a) and b) refer.)

4.3.3 Supplementary meteorological observations made by personnel in local ATS units, as well as the meteorological information that the meteorological offices and stations have requested them to obtain will be supplied without delay to the meteorological offices and stations concerned.

4.3.4 Meteorological information obtained from ATS radar will be provided to meteorological offices and stations whenever necessary and feasible and, in particular, when information from weather radar is not available. This information should be relayed to the associated meteorological offices and stations as soon as possible and should contain the time of observation, location, extent, distance and intensity of the identified significant weather areas. In this regard, it is recognized that it is not mandatory for radar controllers to maintain watch over significant weather areas [if applicable].

4.3.5 ATS units will transmit to the associated aerodrome meteorological offices and to the ..... MWO, as appropriate (and to the ..... VAAC [as agreed with the VAAC]), without delay, information received on pre-eruption volcanic activity, volcanic eruptions and volcanic ash cloud for which SIGMET information has not been issued. (Annex 11, 2.20.1 c) refers) [if applicable].

4.3.6 Within the frame of the flight information service (FIS), relevant ATS units will transmit to aircraft pertinent:

- a) SIGMET information up to a distance normally corresponding to two hours' flying time and appropriate special air-reports for which SIGMET information has not been issued. The transmission to aircraft of such air-reports will continue for ..... from the time of issuance of the respective air-reports;
- b) AIRMET information [if appropriate] up to a distance of ..... hours' flying time;
- c) information concerning pre-eruption volcanic activity, volcanic eruptions and volcanic ash cloud received from [the sources specified in arrangements developed by the ATS, AIS, vulcanological and meteorological authorities in the State concerned] until the respective SIGMET and/or ASHTAM or NOTAM are issued [if applicable];
- d) information received from [the source designated in the State concerned] concerning the release into the atmosphere of radioactive materials or toxic chemicals, in accordance with arrangements developed by [the ATS and AIS authorities] in coordination with the meteorological authority [if applicable]; and
- e) as necessary, weather conditions at departure, destination and alternate aerodromes reported in relevant METAR and SPECI, with trend forecasts and TAF.

## 5. DISSEMINATION OF METEOROLOGICAL INFORMATION

Bearing in mind that meteorological information is of vital importance to the safety of aircraft in flight, it is necessary that the units providing ATS always keep aircraft informed of the current weather conditions. Table A2-3 outlines the

requirements for supplying aeronautical meteorological information to the various ATS units as well as the means of communication to be utilized so that this information reaches the ATS units in good time.

## **6. ATS UNITS AND METEOROLOGICAL OFFICES AND STATIONS — COORDINATION MEETINGS**

Regular and/or ad hoc coordination meetings between the chiefs of the ATS units and chiefs of meteorological offices and stations, and other interested parties, aimed at improving the services provided to aircraft, will be convened as appropriate and at least every ..... months.

## **7. COURSES FOR METEOROLOGISTS AND AIR TRAFFIC CONTROLLERS**

7.1 Courses or on-the-job training for meteorological and ATS personnel will be organized periodically with the objective of familiarizing them with the activities performed by both services.

7.2 Periods and dates for these courses will be agreed by [the ATS authority] and [the meteorological authority] taking into account the availability of personnel and the necessary equipment.

---

## Appendix 3

### INFORMATION ON THE METEOROLOGICAL AUTHORITY AND METEOROLOGICAL SERVICES TO BE INCLUDED IN THE AERONAUTICAL INFORMATION PUBLICATION (AIP)

1. It may be recalled that the aeronautical information publication (AIP) consists of:

Part 1 — GENERAL (GEN);

Part 2 — EN-ROUTE (ENR); and

Part 3 — AERODROMES (AD).

A major portion of the information related to the meteorological authority and meteorological service for international air navigation in the State concerned is presented in Part 1. The meteorological service provided at individual aerodromes and heliports can be found in Part 3. No information on meteorological service is contained in Part 2.

2. The following is a summary of the structure and content of the information on the meteorological authority and meteorological service for international air navigation to be presented in various sections of the AIP. The summary and numbering shown below fully reflect Annex 15, 5.2.2, the PANS-AIM (Doc 10066), Appendix 2 and the guidance given in the *Aeronautical Information Services Manual* (Doc 8126), Chapter 5 and related Appendix.

#### PART 1 GENERAL (GEN)

##### GEN 1. NATIONAL REGULATIONS AND REQUIREMENTS

##### GEN 1.1 DESIGNATED AUTHORITIES

##### 2. Meteorology

The full address of the meteorological authority designated by the State concerned, including telephone, telefax and e-mail addresses as well as an AFS address, are given in this section of the AIP.

**GEN 1.7 DIFFERENCES FROM ICAO STANDARDS, RECOMMENDED  
PRACTICES AND PROCEDURES****3. Annex 3 — Meteorological Service for International Air Navigation**

Differences from Annex 3 Standards filed with ICAO by the State concerned, which form part of the complete list of differences with respect to all other ICAO Annex Standards and other relevant ICAO documents.

**GEN 2. TABLES AND CODES****GEN 2.1 MEASURING SYSTEM,  
AIRCRAFT MARKINGS, HOLIDAYS****1. Units of measurement**

Units of measurement used in meteorological observations, reports, forecasts, warnings and other types of meteorological information are incorporated in a table of units of measurement used in civil aviation in the State concerned or in individual FIRs therein.

**GEN 3. SERVICES****GEN 3.5 METEOROLOGICAL SERVICES****1. Responsible service**

This section includes the full address of the meteorological authority that is responsible for the provision of meteorological service for international air navigation in the State concerned. It should, however, be noted that the meteorological authority designated by the State concerned may arrange for a number of other entities to be involved in the provision of meteorological service for international air navigation on its behalf.

**2. Area of responsibility**

The geographical area within which the meteorological authority provides or arranges for the provision of meteorological service in the State concerned is normally defined by a list of FIRs/control areas to be served.

**3. Meteorological observations and reports**

Table GEN 3.5.3 lists the meteorological observations and reports provided, including:

- name of the aeronautical meteorological station and respective location indicator;
- type and frequency of observation (routine, special);

- types of meteorological reports and messages issued (MET REPORT, SPECIAL, METAR and SPECI) and supplementary information included in the reports and messages (e.g. trend forecasts);
- observation instruments, automatic systems in use, observation sites;
- hours of operation (of individual aeronautical meteorological stations); and
- availability (or otherwise) of aerodrome climatological tables and/or summaries derived from observation data from the aeronautical meteorological stations listed in the table.

#### 4. Types of services

This section provides general information regarding meteorological service provided to users (i.e. operators, flight crew members and ATS units) by aerodrome meteorological offices. The information may describe the following types/aspects of meteorological service:

- issuance of
  - local forecasts (TAF, trend forecasts);
  - aerodrome warnings;
  - wind shear warnings (if applicable);
  - en-route forecasts (in particular forecasts for low-level flights that cannot be obtained from WAFS centres); and
- availability of
  - meteorological products, such as charts, weather radar information/data, meteorological satellite data;
  - meteorological information for pre-flight planning by operators and flight crew members, including information on volcanic activity and volcanic ash clouds, both for flights above FL 100 or 150 and for low-level flights;
  - WAFS products used for pre-flight planning, flight documentation and briefing;
  - briefing and consultation facilities.

*Note.— More detailed information concerning these types of services and facilities is specified in 8.3 and 9 below.*

## 5. Notification required from operators

This section contains, in particular, requirements for timely notification of flights (individual flights or flights in accordance with individual operators' regular flight schedules, repetitive flight plans, etc.) to be submitted by operators or flight crew members to the aerodrome meteorological office concerned. (The content of such notifications can be found in Annex 3, Chapter 2, 2.3.4.) This section may also include the requirements of the meteorological authority concerning notification of new routes, new types of operations, changes of a lasting character in scheduled operations and other changes affecting the provision of meteorological service to individual operators.

## 6. Aircraft reports

Requirements regarding air-reporting are given in Annex 3, Chapter 5. It may be recalled that in addition to air-reporting by voice communications, automated air-reporting by data link has been implemented (Chapter 4, 4.2 of this manual refers). In view of this, information presented in this section should summarize the requirements for and procedures related to both modes of air-reporting. In respect of air-reports by voice communications, the following should be included:

- designation procedures for air-reporting on routes with high-density air traffic;

*Note.— Designation procedures should reflect respective regional air navigation agreements.*

- requirements for the delivery of post-flight reports of aircraft observations of volcanic activity (on the special air-report of volcanic activity form) to aerodrome meteorological offices.

Similar aspects should also be dealt with in terms of air-reporting by data link. In such cases, particular attention is to be paid to the identification of data link applications used for routine and special air-reports. If ADS-C is applied to routine air-reports, procedures concerning the establishment of respective ADS-C contracts should be specified.

## 7. VOLMET service

VOLMET broadcasts provided in the State concerned are described in Table GEN 3.5.7 containing the following specifications relating to individual broadcasts:

- name of station;
- call sign and identification;
- frequency of broadcast (VHF or HF);
- hours of service;
- aerodromes/heliports included;
- content and format of the reports and/or forecasts (METAR + trend forecast (if applicable), and SIGMET and TAF broadcast through various VOLMET broadcasts in compliance with relevant regional air navigation agreements) and remarks.

*Note.— In many States the VOLMET service is provided by the ATS authority. This authority will therefore also originate specifications to be incorporated in the AIP regarding the service.*

## 8. SIGMET and AIRMET service

The necessary information regarding this service is provided in Table GEN 3.5.8, SIGMET service, and in the explanatory text relating to the table. The table includes:

- name of the meteorological watch office issuing SIGMET, location indicator;
- hours of service;
- SIGMET validity periods (i.e. SIGMET — validity 4 hours, and SIGMET for volcanic ash or tropical cyclones — validity up to 6 hours);
- specific procedures that may apply in the State concerned;
- ATS units served (ACCs and FICs with which the MWO is associated);
- additional information.

*Note.— If AIRMET information is issued by an MWO in accordance with regional air navigation agreement to support low-level flight operations, Table GEN 3.5.8 should be extended to include similar specifications related to AIRMET information.*

These specifications should be supplemented by the following information:

### 8.1 General

- description of the meteorological watch maintained in the State concerned;
- MWOs maintaining the watch and their functions;
- detailed specifications concerning the area over which the watch is maintained and within which individual types of SIGMET are issued (FIRs/control areas and/or their sub-areas, both in terms of horizontal and vertical limits);
- the VAAC (if applicable) and TCAC (if applicable) associated with the MWOs.

### 8.2 Area meteorological watch

- types of SIGMET issued;
- *specific* procedures applied to the issuance of SIGMET (e.g. validity period, numbering, description/definition/indication of required weather phenomena in SIGMET);

*Note.— It should be noted that the relevant procedures in Annex 3, 7.1 and 7.2 should be adhered to, to the maximum possible extent.*

- dissemination of SIGMET, special and non-routine air-reports to aircraft by ATS units;
- dissemination to aircraft of volcanic ash advisories by ACCs/FICs (if applicable).

*Note.— Similar material concerning AIRMET information should be incorporated in this section if these messages are issued in accordance with regional air navigation agreement.*

### 8.3 **Warning service**

This section contains detailed specifications and procedures concerning aerodrome warnings and wind shear warnings:

- aerodromes for which aerodrome and/or wind shear warnings are issued;
- criteria for the issuance of aerodrome warnings (at individual aerodromes);
- procedures for the issuance of aerodrome and wind shear warnings;
- dissemination procedures.

## 9. **Other automated meteorological services**

Table GEN 3.5.9, Other automated meteorological services, includes specifications concerning, for example, automated information systems established in the State concerned to provide OPMET information to aeronautical users. Information concerning self-briefing systems, systems through which flight documentation can be obtained and systems providing OPMET information to support low-level flights, including VFR flights, may be also presented in the table. Specifications to be included in the table are as follows:

- service name;
- information available;
- areas, routes and aerodromes covered;
- telephone, facsimile numbers (email addresses to access the systems) and remarks.

## **PART 3 AERODROMES (AD)**

### **AD 2. AERODROMES**

*Note.— \*\*\*\*js to be replaced by the relevant ICAO location indicator.*

#### **\*\*\*\*AD 2.3 OPERATIONAL HOURS**

### 6. *MET Briefing Office*

*Provides the hours of operation of the MET Briefing Office.*



**\*\*\*\*AD 2.11 METEOROLOGICAL  
INFORMATION PROVIDED**

Provides a detailed description of the meteorological information provided at the aerodrome, including:

- name of the associated MET office (to the aerodrome concerned);
- hours of service (of the associated office), the aerodrome meteorological office providing the service outside the hours of service of the associated aerodrome meteorological office;
- office responsible for TAF preparation, periods of validity (of the TAF issued);
- trend forecast issued, interval of issuance;
- briefing/consultation provided;
- flight documentation, languages used;
- charts and other information available for briefing or consultation;
- supplementary equipment available for providing information (e.g. facsimile, self-briefing terminals);
- ATS units provided with information (TWR, APP);
- additional information (limitation of service, etc.).

**AD 3. HELIPORTS**

*Note.— \*\*\*\*is to be replaced by the relevant ICAO location indicator.*

**\*\*\*\*AD 3.3 OPERATIONAL HOURS****6. MET Briefing Office**

*Provides the hours of operation of the MET Briefing Office.*

**\*\*\*\*AD 3.11 METEOROLOGICAL INFORMATION PROVIDED**

Provides a detailed description of the meteorological information provided at the heliport, including:

- name of the associated MET office (to the heliport concerned);
- hours of service (of the associated office), the aerodrome meteorological office providing the service outside the hours of service of the associated aerodrome meteorological office;
- office responsible for TAF preparation, periods of validity (of the TAF issued);

- trend forecast issued, interval of issuance;
  - briefing/consultation provided;
  - flight documentation, languages used;
  - charts and other information available for briefing or consultation;
  - supplementary equipment available for providing information (e.g. facsimile, self-briefing terminals);
  - ATS units provided with information (TWR, APP);
  - additional information (limitation of service, etc.).
-

## Appendix 4

# PROCEDURES USED IN FRANCE TO PROVIDE METEOROLOGICAL SERVICE TO ATS UNITS

### 1. ATS AND METEOROLOGICAL AGENCIES AND UNITS INVOLVED

#### 1.1 ATS agencies, centres and units

##### *General*

1.1.1 As a part of the Directorate of Air Navigation (la Direction de la Navigation Aérienne (DNA)) of the French Civil Aviation Administration (la Direction Générale de l'Aviation civile (DGAC)), the Air Traffic Control Service (le Service du Contrôle du Trafic Aérienne (SCTA)) is operationally responsible for the ATS system, whose functioning it coordinates through five area control centres/flight information centres (les Centres en Route de la Navigation Aérienne (CRNAs)) in metropolitan France.

##### *ATS centres providing service en route*

1.1.2 The French airspace of metropolitan France is divided into five flight information regions (Paris, Reims, Brest, Bordeaux and Marseille) in lower airspace (below FL 195) and one upper flight information region (UIR) (France) in upper airspace (above FL 195).

1.1.3 In each FIR, air traffic services are provided by:

- a) an area control centre (ACC); and
- b) a flight information centre (FIC).

1.1.4 Each ACC provides ATS also in the portion of the France UIR situated above its airspace.

1.1.5 The French administration also provides ATS in French Polynesia, in the Tahiti FIR (from surface to unlimited FLs) and in French Guyana, in the Rochambeau FIR (from surface to FL 245) and in the Rochambeau UIR, above FL 245.

##### *ATS units relating to aerodromes*

1.1.6 Air traffic services at aerodromes are provided, depending on the circumstances, by the following units:

- a) approach control unit (APP);

- b) aerodrome control tower (TWR); and
- c) aerodrome flight information service (AFIS).

1.1.7 Some APPs provide approach control service also for satellite aerodromes; these offices are called “central approach”.

1.1.8 Other APPs provide ATS in airspace called “flight information sector” (FISECT) within the FIR concerned.

## 1.2 Meteorological authority, centres, offices and stations

### **Introduction**

1.2.1 Under the Single European Sky Regulation, Météo-France is the meteorological authority designated by the French State to provide, or arrange for the provision of, meteorological service for air navigation and, in that capacity, to contribute towards the safety, regularity and efficiency of air navigation.

*Note.— The use of the wording “meteorological authority” is made according to the English version of Annex 3; in the French version of Annex 3, the wording used is “Administration Météorologique”, which is compatible with the concept of “service provider”, but may have a different meaning, in particular if the MET Authority has the meaning of “Regulator”. At the time this appendix was reviewed, no information was available yet on the designated MET Regulator in France, while the existing French legal texts designate without ambiguity that Météo-France is l’Administration Météorologique according to the French version of ICAO Annex 3.*

1.2.2 The services provided by Météo-France to users of French airspace are defined in the French Civil Aviation Code and in a regulatory text (the Decree) which applies to the Code.

1.2.3 Although they are not mentioned in the following paragraphs, products of WAFS, and particularly those of WAFS London, form a part of the meteorological service provided by Météo-France to operators as well as ATS units concerned.

### **Météo-France agencies and centres involved in the provision of meteorological service to air navigation in France and overseas**

1.2.4 The Directorate General of Météo-France (la Direction Générale de Météo-France), located in Paris, includes an office which is responsible for coordination with aviation. This office represents the direct link between the DNA, airlines and aeronautical federations. It contributes to define the meteorological service to be provided to aeronautical users as well as the necessary facilities (such as aerodrome meteorological offices, aeronautical meteorological stations, systems and instrumentation) and manage the corresponding budget. In doing so, due account is taken of ICAO Standards and Recommended Practices as well as the procedures in regional air navigation plans and the French Civil Aviation Code requirements and specifications. National or local needs and constraints are also fully respected in this process, in particular the Single European Sky Regulations for the MET service delivery.

1.2.5 Based in Toulouse, the Central Meteorological Operational Service is equipped with powerful computing facilities and runs global and regional numerical weather prediction models. It is responsible for the production of large-scale and regional weather forecasts (covering at least metropolitan France). It is also responsible for providing guidance (in the form of “directives”) to the other Météo-France offices in terms of main weather features forecast in metropolitan France. This guidance must also be applied to regional and local forecasts, including those prepared for

aviation purposes. The numerical weather forecasts produced in this centre are disseminated to meteorological centres and offices in metropolitan France and overseas.

1.2.6 Many functions of this meteorological centre are directly related to the provision of meteorological service for aviation in metropolitan France and overseas and to international air navigation worldwide.

1.2.7 In respect of aeronautical meteorological information, the centre:

- a) produces and issues, every three hours, SIGWX prognostic charts for the EURO area, covering western Europe and northern Africa and the layer between the surface and FL 450;
- b) prepares and issues upper wind and upper-air temperature prognostic charts for various pressure levels/FLs covering France and the EURO area;
- c) coordinates with relevant Météo-France offices the preparation of SIGWX low-level prognostic charts for metropolitan France. The charts are issued for the layer between the surface and 12 500 ft every three hours during the daytime; and
- d) prepares and issues SIGMET information for the France UIR.

1.2.8 In respect of meteorological communication systems designed to be used by aeronautical users, including ATS and meteorological personnel engaged in the provision of meteorological service to aviation, the centre develops, implements and operates:

- a) an OPMET data bank called the Aeronautical Request/Reply (Interrogation Réponse Aéronautique (IRA)) Data Bank which contains the global (worldwide) set of alphanumeric OPMET messages (METAR, SPECI, TAF, SIGMET); and
- b) various systems for the dissemination of aeronautical meteorological information to aeronautical users, such as:
  - 1) AEROCARTE server designed for facsimile use by airlines;
  - 2) AEROFAX server designed for facsimile use by general aviation pilots;
  - 3) RETIM/AEROMET satellite broadcast supplying meteorological charts and messages which are intended to be processed on aeronautical workstations with an appropriate software;
  - 4) METEO+ making available to users information from meteorological satellites and radar in pictorial form;
  - 5) METAR magazine via the Minitel; and
  - 6) Aeroweb, making use of the public Internet.

1.2.9 Finally, in accordance with a regional air navigation agreement, France accepted the responsibility for providing a volcanic ash advisory centre (VAAC), a part of the ICAO International Airways Volcano Watch (IAVW). The responsibility for the establishment and operations of the Toulouse VAAC was entrusted to the Toulouse centre (for details see 3.1).

1.2.10 *The Inter-regional Departments (les Directions Inter-Régionales (DIR)) of Météo-France.* There are seven DIRs in metropolitan France and four DIRs overseas (in Antilles-Guyana, French Polynesia, La Réunion (also includes

Mayotte) and New Caledonia). They are administratively responsible for meteorological stations and offices at aerodromes as well as MWOs located in their territories. In this regard, the DIRs issue necessary formal administrative provisions (directives). In respect of forecasting, they represent an obligatory coordination link between the central office in Toulouse and meteorological offices and stations under their responsibility. The DIRs may also have to perform the functions of their meteorological offices at aerodromes during the hours when these are closed.

1.2.11 The DIRs supply required meteorological information to the telephone answering system providing meteorological service for general aviation and to the Minitel service (METAR magazine).

1.2.12 In metropolitan France, the DIRs actively participate in preparing SIGWX forecasts (le TEMSI France), which leads to a very detailed description of the weather conditions relevant for aviation. Input from individual DIRs is developed on the basis of guidance from Toulouse and covers their respective areas of responsibility. The central office in Toulouse is in charge of the coordination, synthesis and issuance of the final product.

1.2.13 In the regions of Antilles-Guyana, New Caledonia and La Réunion, the DIRs prepare low-level SIGWX charts for their individual regions. (The charts may occasionally be extended to upper flight levels.)

#### ***Météo-France centre and offices providing meteorological service for aviation within FIRs***

1.2.14 There are five MWOs in metropolitan France located in: Aix-en-Provence (associated with Marseille FIR), Paris (associated with Paris FIR), Bordeaux (associated with Bordeaux FIR), Strasbourg (associated with Reims FIR) and Rennes (associated with Brest FIR). The Toulouse forecasting centre is designated to exercise the responsibilities of the MWO within the France UIR and to ensure the backup procedures in case of metropolitan MWO incapacity. Overseas, there are MWOs established at Tahiti (Tahiti FIR) and Rochambeau (Rochambeau FIR).

1.2.15 The role of these MWOs is as defined in Annex 3, Chapter 3, 3.4. It consists, in particular, of maintaining watch over meteorological conditions affecting flight operations within the FIRs for which they are responsible and issuing SIGMET information.

1.2.16 The MWOs exercise their functions in close collaboration with the CRNAs. Memoranda of understanding formalize the relationship between the two parties.

#### ***Météo-France offices and stations providing meteorological service for aviation at aerodromes***

1.2.17 Aeronautical meteorological stations at aerodromes make routine and special observations and issue routine, special and selected special reports. In addition, take-off and landing forecasts are also issued by these stations. At some aerodromes at some period of time, there is no meteorological staff; in such cases, in coordination with the aerodrome users and with the Air Navigation Administration DGAC, observations are made automatically, even during opening hours (accordingly, France has officially notified differences to Annex 3). The consistency of the observations is watched by the corresponding MWO or a designated aerodrome meteorological office.

1.2.18 Meteorological offices at aerodromes provide meteorological information to aeronautical users, including ATS personnel, supply flight documentation to flight crew members and the operators concerned (in some cases through autobriefing systems, but users always have the possibility to contact an aeronautical MET forecaster) and prepare, issue and monitor TAF. At aerodromes without meteorological staff, TAF are prepared, issued and monitored by the corresponding MWO or a designated aerodrome meteorological office.

1.2.19 Meteorological offices and aeronautical meteorological stations at aerodromes are associated with local ATS units (TWRs and APPs concerned).

## 2. COORDINATION

### 2.1 Meteorological information supplied to ATS units

#### *En-route ATS units*

2.1.1 **The CAUTRA computer.** Products of the French (Météo-France) global forecast model are fed in real time to the air navigation CAUTRA computer. The CAUTRA computer prepares integrated information to be used by air traffic controllers in exercising their duties. Currently, in particular, upper wind and upper-air temperature data are employed in the preparation of the integrated information.

2.1.2 **Meteorological information supplied to the CRNA control positions.** The following meteorological information is supplied to these control positions:

- a) **the ASPOC system (l'Application de Signalisation et Prévision des Orages pour le Contrôle Aérienne).** The system was developed by Météo-France. The product is aimed at providing controllers with a tool for improving the real-time awareness of the thunderstorm cells that might affect aircraft manoeuvres. Such information helps in planning aircraft diversion avoidance movements. Ultimately, it is envisaged that CRNA controllers will be supplied with images combining both the information on the air traffic situation and the graphic information on convective systems derived from the national network of meteorological radars, HF and VHF lightning position and tracking systems and the METEOSAT geostationary satellites. The real-time images of convective cells and thunderstorms displayed by the system are updated at five-minute intervals. Taking into account the time needed to process the input observations, the real-time information displayed by the system effectively represents a five-minute nowcast. This can be further extrapolated for T + 5 minutes, T + 10 minutes, etc. The initial version of the system was designed as an independent system. The visualization of information on separate screens at CRNAs is, however, similar to that used on the CRNA controllers' screens, in particular in terms of scales used (see Figure A4-1). This project was conducted in close collaboration with ATS experts, and its concept and specifications are now approved by the Air Navigation Authority;
- b) images from meteorological satellites and radar (see Figure A4-2), including information from lightning position and tracking systems; these images are available in the en-route French control centres. The information is displayed on a dedicated workstation developed by Météo-France named Météo+, the data being acquired through the French satellite dissemination system RETIM2000;
- c) aerodrome forecasts and aviation routine weather reports (METAR and TAF) from principal aerodromes in the FIR concerned (see Figures A4-3 and A4-4); additional METAR and TAF can be obtained on request by accessing the IRA database; various bulletins containing required METAR and TAF are communicated to the control positions via the AFTN;
- d) SIGMET relating to the FIR concerned and adjacent FIRs;
- e) upper wind forecasts for specified points in the FIR concerned at five different flight levels;
- f) **the CIGALE system (le Chaîne d'information Générale).** Through this system developed by the DNA, CRNA personnel are supplied with, among other things, upgraded meteorological information.

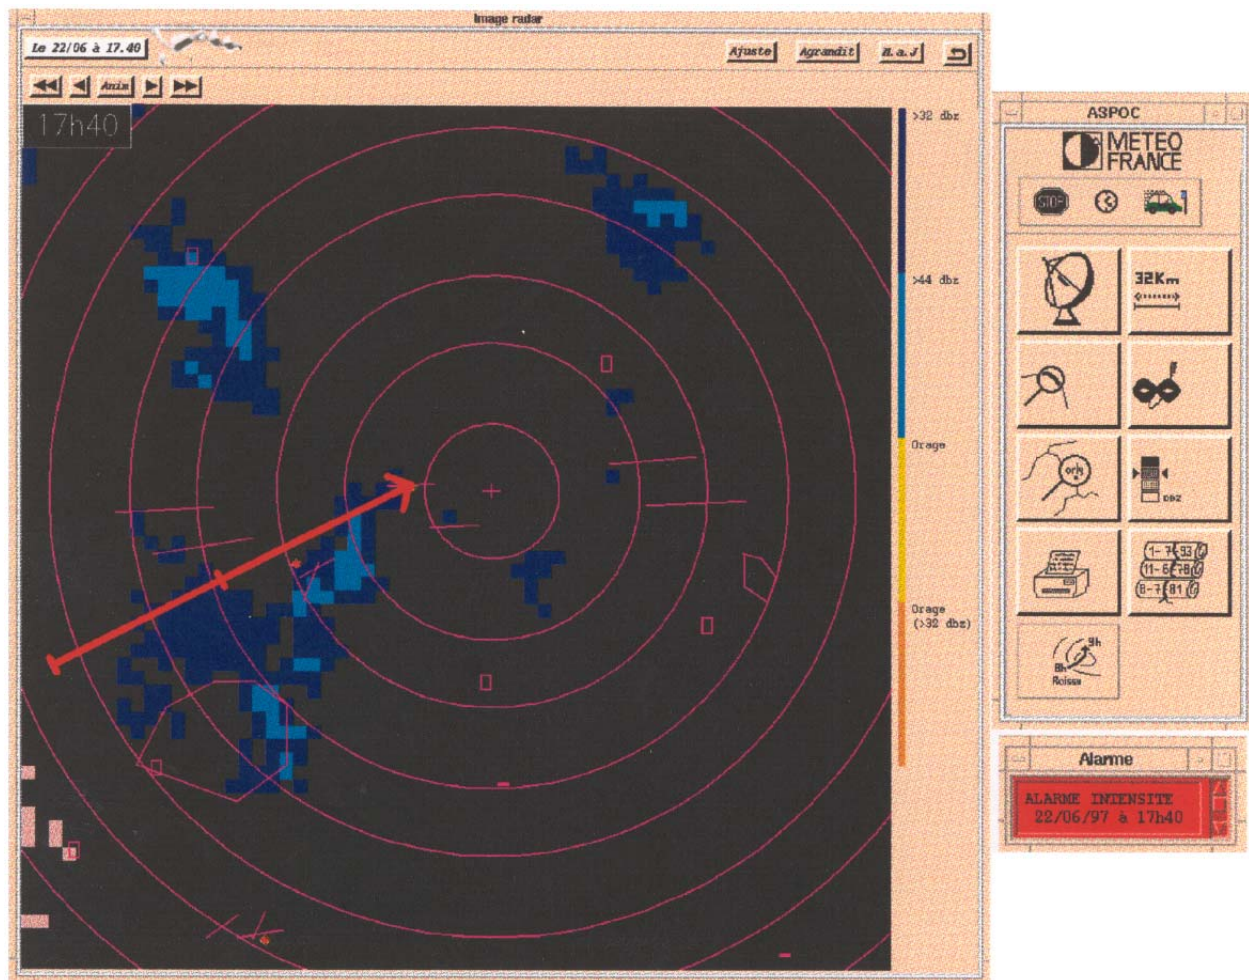


Figure A4-1. ASPOC screen (convective cells displayed)

### ATS units at aerodromes

2.1.3 Météo-France supplies meteorological information to ATS units at aerodromes according to the DIFNA (le protocole de DIFfusion vers la Navigation Aérienne) dissemination protocol. The required information is accessible to controllers through their workstations. It is compiled into one or more pages that are continuously updated and can be retrieved at any time by controllers on their workstation displays (see Figures A4-5 and A4-6).

2.1.4 Meteorological observations and reports for use at the aerodrome of origin are supplied to local ATS units in the form of local routine reports (OBSMET (observation météorologique)) and local special reports (SPECIAL). These reports include:

- a) current (latest) values of meteorological elements measured by respective sensors deployed at runways or at aerodromes. The reports, composed automatically of these measurements, are made available to controllers through their workstations in one-minute intervals. The necessary corrections are automatically introduced into the valid data as soon as they are indicated by the system;



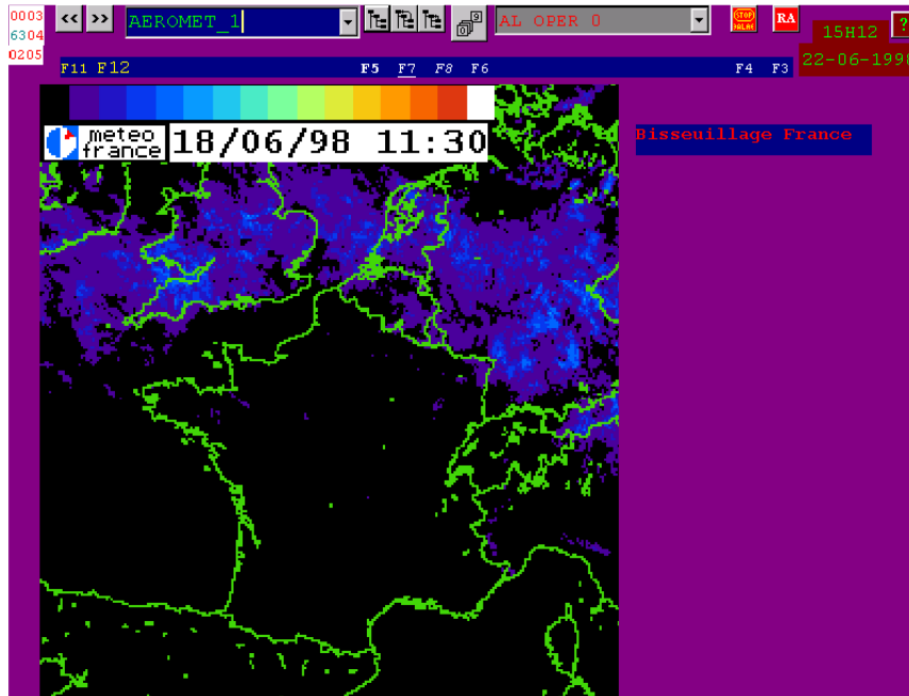


Figure A4-2. Processed weather radar information available in selected CRNAs

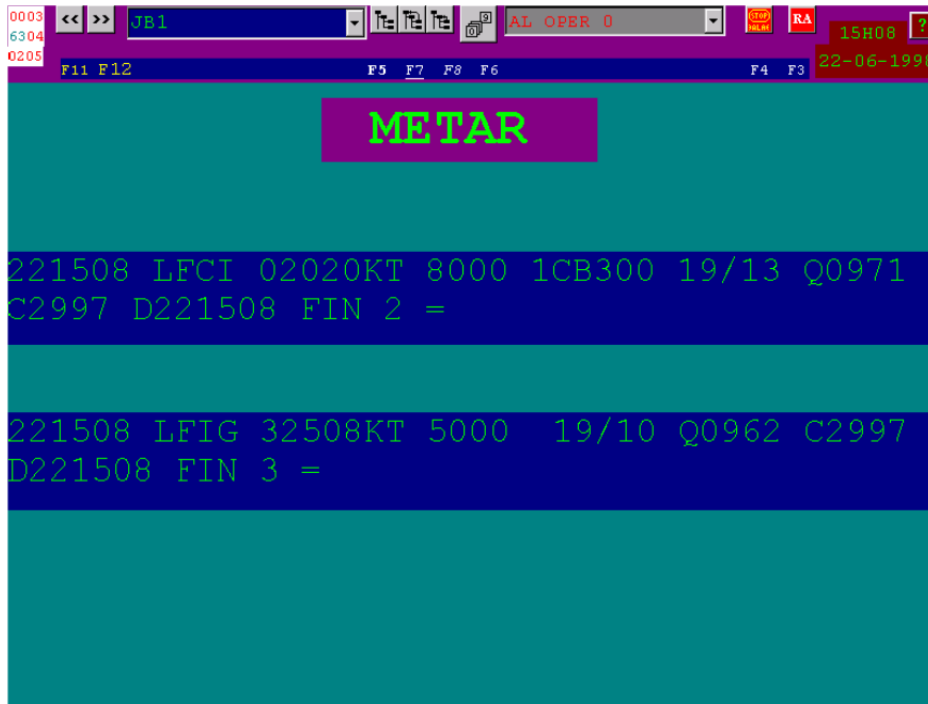


Figure A4-3. Presentation of a METAR at CRNA control positions

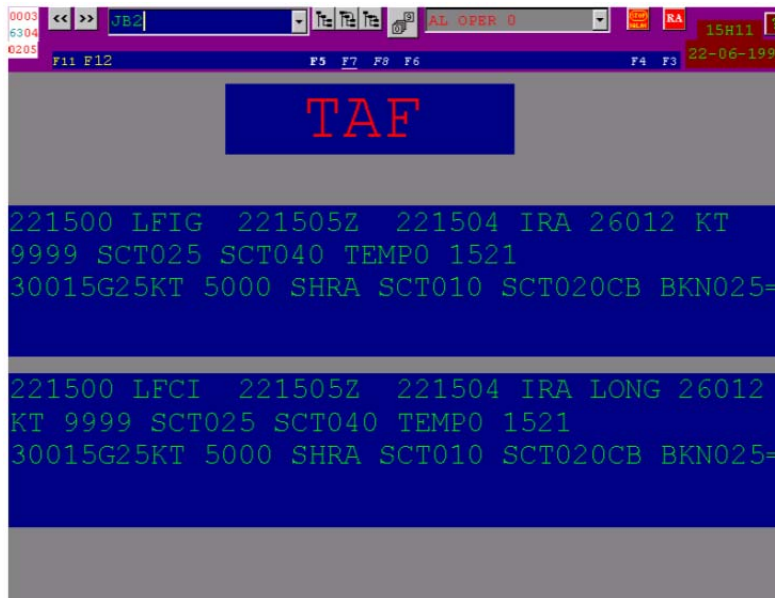


Figure A4-4. Presentation of a TAF at CRNA control positions

- b) current observations (as required for routine reports) made by a human observer. These manual observations, representative of the aerodrome and its vicinity and issued with the frequency required for routine reports (i.e. in half-hourly or hourly intervals), are supplemented by special observations required for special reports made according to the criteria for special observations. These observations cannot be made available for DIFNA dissemination or supply to controllers at aerodromes without a human observer; and
- c) supplementary observations agreed locally. No national recommendation concerning these observations has been formulated. The supplementary observations are supposed to complement the contents of OBSMET and SPECIAL reports designed to meet ICAO provisions relating to routine and special observations and reports.

2.1.5 Specific Météo-France arrangements apply to the provision of meteorological service at aerodromes without the presence of Météo-France personnel. Meteorological information required for flight operations at such aerodromes is supplied to the local ATS personnel from Météo-France automatic equipment deployed at these aerodromes. The equipment produces, in particular, visibility observations representative of the aerodrome.

2.1.6 Local forecasts are prepared and issued by local forecasters in the form of the forecast for take-off (Prévision de décollage (PREDEC)) messages with the frequency required by the DIFNA protocol.

2.1.7 **Meteorological observations and reports for use beyond the aerodromes of origin.** Routine reports, in the form of METAR messages, and selected special reports, in the form of SPECI messages, are subject to national and international operational meteorological data exchange. A part of these messages may also be disseminated under the DIFNA protocol. This procedure may accelerate the supply of messages to certain local ATS units (e.g. ACCs/FICs).

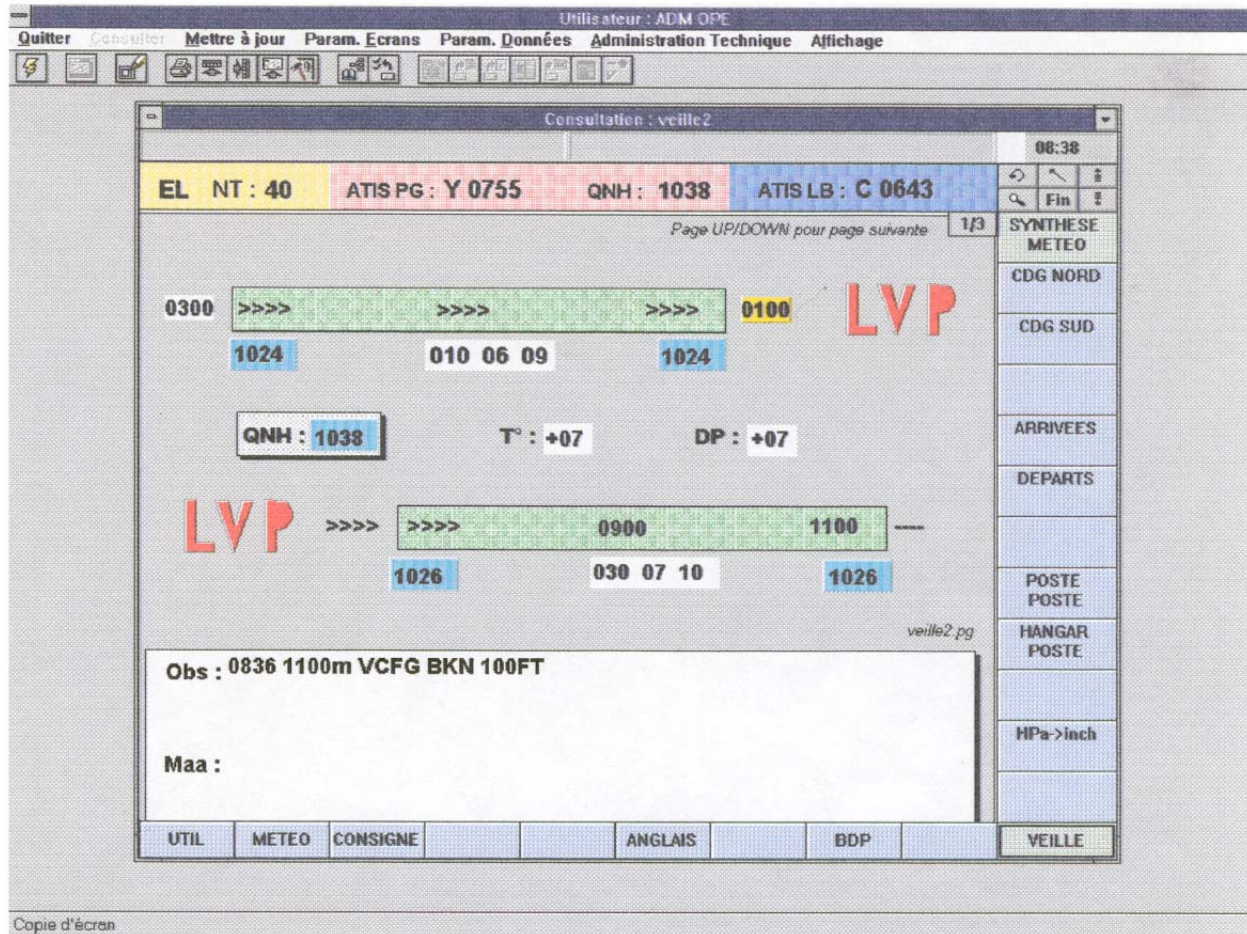


Figure A4-5. Presentation of local meteorological observations at control positions in ATS units at aerodromes

#### **Automatic dissemination of meteorological information**

2.1.8 **VOLMET broadcasts.** The VHF VOLMET broadcasts Bordeaux, Marseille and Paris (Radio Bordeaux, Marseille and Paris, respectively) are operated in accordance with the relevant requirements in the regional air navigation plan for Europe. Automatically generated radiotelephony broadcast services in English and French include the METAR and SIGMET messages specified in the regional air navigation plan, automatically supplied to the broadcast systems.

2.1.9 **The STAP system (le Système de Transmission Automatique de Paramètres).** The system is operated at certain aerodromes that are not served by local ATS units. The ATS frequency allocated to the aerodrome concerned is used for the STAP service. Routine reports derived from automatic observing stations at such aerodromes can be obtained by pilots through the system on request.

2.1.10 The automatic meteorological stations producing meteorological reports for the STAP system are approved and periodically inspected by Météo-France.



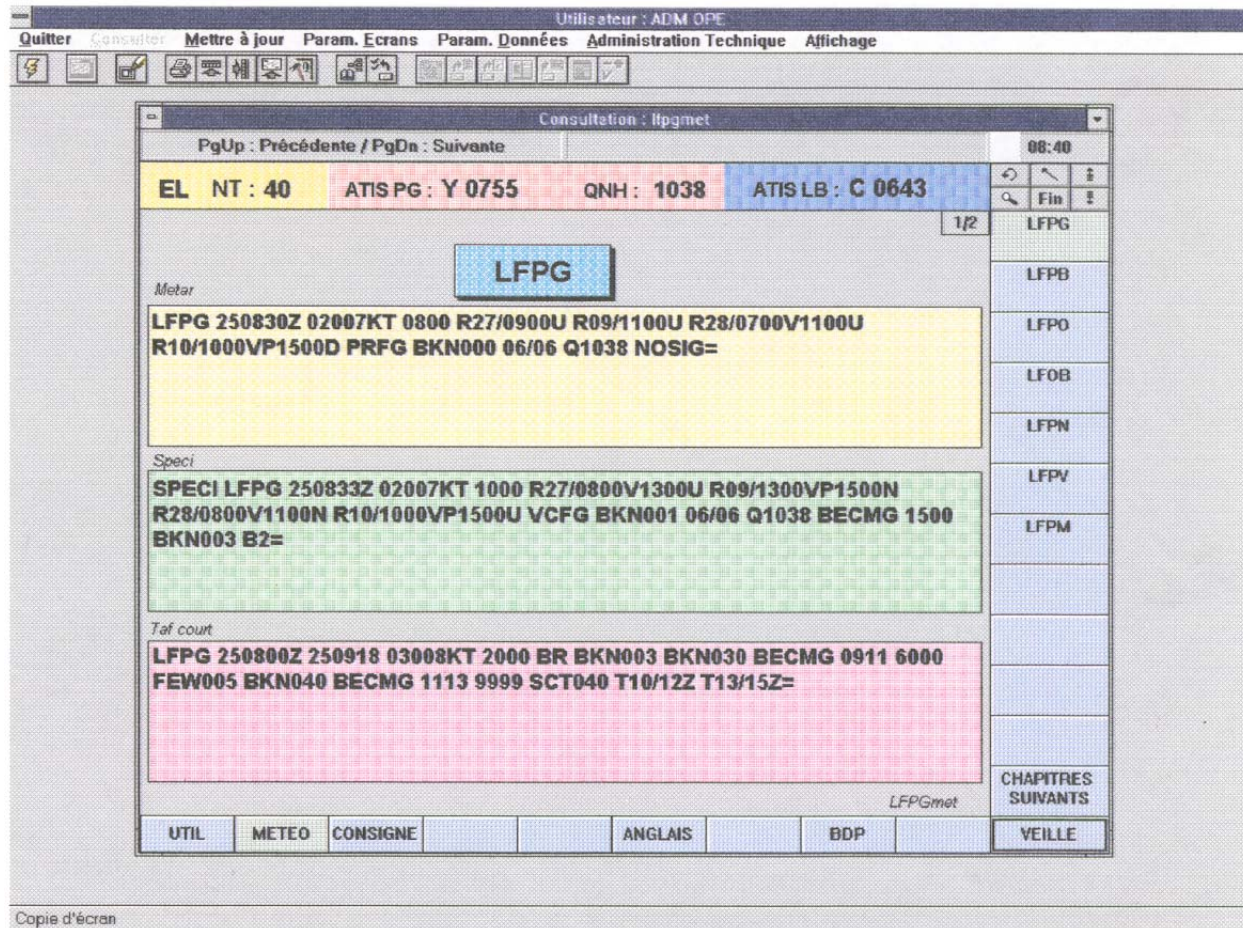


Figure A4-6. Presentation of METAR and TAF at control positions  
in ATS units at aerodromes

## 2.2 Meteorological information obtained by ATS units

### Aircraft observations and reports (AIREPs)

#### **Routine observations and reports (automatic, by data link)**

2.2.1 The phase 2 VIVO (le Visualisation des Vols Océanique) system is implemented in the Tahiti FIR. This provides for the exchange of clearances by controller-pilot data link communications (CPDLC). The implementation of data links for CPDLC and ADS-C in the Tahiti FIR was designed in compliance with the FANS-1 standard. Both data link applications operate within the aircraft communications addressing and reporting system (ACARS) satellite and VHF communications network.

2.2.2 In this environment, position reports are generated by aircraft avionics every 30 to 40 minutes. Each report contains meteorological information. As soon as the generation of a report is completed, it is displayed to the pilot-in-command for transmission via CPDLC to the ATS centre concerned. Upon receipt in the ATS centre, position reports are

automatically transmitted from the VIVO system to the local flight plan database of the SIGMA (le Système Informatique de Gestion des Mouvements d'aérodrome) where the meteorological information is extracted and issued in the form of an AIREP for further automatic transmission via the AFTN.

2.2.3 The ADS-C corresponding to the phase 3 VIVO system was scheduled for implementation at the beginning of 1999. The technical capabilities of this upgraded system were developed to provide for the periodic automatic transmission of on-board data, including meteorological data, to the air traffic control centres concerned.

2.2.4 In contrast to the use of CPDLC, the phase 3 VIVO data transmission is fully transparent for pilots. The position reports are transmitted to the SIGMA and meteorological data are extracted for further automatic transmission in the form of AIREPs, without any action by controllers.

2.2.5 In the phase 3 VIVO environment, one of four ADS-C position reports contains a meteorological data block. Given that the frequency for position reports is 15 minutes, automatic AIREPs are issued only once in an hour. The relatively high cost of the air-ground communications and the SIGMA computer capacity, which does not allow for rather extensive AIREPs processing, are the reasons for this limitation.

#### ***Special observations and reports (manual, by voice communications)***

2.2.6 Special observations are made whenever the following conditions are encountered:

- a) severe icing or severe turbulence; and
- b) other meteorological conditions, e.g. phenomena en route that would justify the issuance of SIGMET messages and which may markedly compromise the efficiency of other aircraft operations.

#### ***Observations and reports during initial climb and approach***

2.2.7 During initial climb and approach, observations may be made when the following conditions are encountered and which, in the pilot's opinion, may affect the safety of other aircraft operations:

- a) moderate turbulence;
- b) moderate icing;
- c) wind shear;
- d) hail; and
- e) freezing rain.

#### ***Additional observations***

2.2.8 Additional observations can also be made at the request of an aerodrome meteorological office or on the basis of agreements between Météo-France and the operators concerned.

***Dangerous weather-phenomena warnings  
transmitted by an aircraft***

2.2.9 Information concerning dangerous weather phenomena, particularly icing and turbulence, received in ATS units from aircraft are transmitted by ACCs/FICs to MWOs and by local ATS units to meteorological stations; this information is analysed and, if necessary, a SIGMET is issued by the MWOs concerned.

***Meteorological information obtained from Air France aircraft***

2.2.10 Météo-France is a partner of the WMO aircraft meteorological data relay (AMDAR) project for collecting automated real-time on-board meteorological observations. In this context, observations by Air France aircraft are made in accordance with a bilateral agreement between Air France and Météo-France. Upper wind, upper-air temperature and turbulence data obtained from aircraft are transmitted by Air France direct to the Météo-France Central Meteorological Operational Service, Toulouse. The cost of covering the data acquisition is financed by Météo-France.

***Information on runway surface conditions***

2.2.11 Information on runway surface conditions for inclusion in SNOWTAM is derived from measurements made on runways by ATS units at aerodromes. Results of the measurements are transmitted, uncoded, to meteorological stations at aerodromes. On the basis of these measurements, the aeronautical meteorological stations develop one or more runway state groups required to be added to METAR messages. The runway state groups issued are updated or withdrawn from METAR upon the receipt of new input from the ATS unit concerned.

## 2.3 Coordination bodies

2.3.1 ***The national level.*** According to the European Single Sky Regulation, Météo-France is the provider of the meteorological service to air navigation. In this context, a board composed of the Regulator and the supervising authority of this service meets twice a year with Météo-France representatives to establish a list of priorities to be pursued, to discuss specific technical issues, to develop an equipment implementation plan and to analyse the regulatory, technical and financial implications relating to the provision of meteorological service to aviation.

2.3.2 ***The regional level.*** Representatives of regional departments of the DGAC and Météo-France meet as necessary to deal with equipment implementation in the region (within the framework of the implementation plan developed by the national board), common infrastructures, common master plans and common ownership of properties aspects.

2.3.3 Representatives of the associated MWOs and CRNAs meet in working groups. As mentioned in 1.2.16, bilateral memoranda of understanding are established and signed between individual associated MWOs and CRNAs.

2.3.4 Finally, the High Council for Meteorology provides a forum for users to formally express their requirements for meteorological service and for Météo-France to present information on its activities. The Council is chaired by the Minister of Transportation. Two commissions of the Council, one specialized in general aviation (l'aviation légère) and the other in commercial air transport (l'aviation de transport) allow for fruitful discussion among airlines, aeronautical federations, the DNA and Météo-France. In the context of the quality management system of the air navigation meteorological service provision, this High Council is an important structure where the users' needs are recorded.

### 3. MÉTÉO-FRANCE COMMITMENTS IN THE PROVISION OF METEOROLOGICAL SERVICE FOR INTERNATIONAL AIR NAVIGATION

3.1 France accepted, by regional air navigation agreement, responsibility for providing a Volcanic Ash Advisory Centre (VAAC) within the ICAO IAVW, and a Tropical Cyclone Advisory Centre (TCAC).

#### 3.2 VAAC Toulouse

3.2.1 Météo-France was designated to establish and operate VAAC Toulouse.

3.2.2 On receipt of information on new volcanic activity and/or a new occurrence of volcanic ash cloud in the VAAC area of responsibility, the following actions are taken by the centre:

- a) contact of the source of information if possible for confirmation;
- b) establishment of operational contacts among the ATS units, MWOs and vulcanological agencies and observatories concerned (as per the ICAO list of operational contacts points). Information concerning the event obtained from these parties is useful to accurately initialize the volcanic ash trajectory/dispersion model;
- c) preparation and issuance of the first volcanic ash advisory information including: name of the erupting volcano, its identification number and location, source of information on the event and expected time of the next advisory;
- d) a VOLCAN model run, satellite monitoring, evaluation of dispersion charts and issuance of volcanic ash advisory information according to the ICAO format described in Table A2-1 of Appendix 2 of Annex 3 to the Chicago Convention, *Meteorological Service for International Air Navigation* and/or graphical format;
- e) continuing satellite monitoring and reruns of the VOLCAN model employing updated data from the Météo-France global model; and
- f) issuance of volcanic ash advisory information every six hours until the volcanic ash cloud can no longer be identified from satellite data (and, where available, from ground-based and airborne data), and is therefore considered to have disappeared.

3.2.3 The centre maintains regular liaison with other VAACs as well as with the Smithsonian Institution's Global Volcano Logical Network to maintain currency of information on volcanic activity within the centre's area of responsibility.

3.2.4 VAAC Toulouse volcanic ash advisory information is prepared in compliance with relevant ICAO provisions. Individual volcanic ash advisory messages are communicated to MWOs, ACCs/FICs and the users concerned through the AFTN and the WMO GTS. The messages can be also retrieved from the Météo-France IRA data bank.

3.2.5 The AFTN dissemination pattern for VAAC Toulouse volcanic ash advisory messages is as follows:

- a) MWOs and ACCs/FICs in the AFI, EUR and MID/ASIA Regions, in accordance with requirements in the regional air navigation plans concerned;
- b) WAFC London; and
- c) all other VAACs.

3.2.6 Volcanic ash trajectories and dispersion charts issued by VAAC Toulouse comprise:

- a) volcanic ash trajectory forecasts for different flight levels, valid for the time period up to 36 hours from the time of eruption, divided into six-hour time periods;
- b) dispersion forecasts from 0 to 18-hour time periods depicted by the ash cloud outline integrated for several standard layers and over the entire atmosphere.

3.2.7 These charts are transmitted to the SADIS provider State (United Kingdom) for dissemination via this system. They are also disseminated through the French RETIM2000 satellite distribution system and are available on the Météo-France aeronautical workstations system.

### **3.3 TCAC La Réunion**

#### ***The TCAC's area of responsibility and facilities***

3.3.1 Météo-France was also designated to establish and operate TCAC La Réunion. The TCAC area of responsibility extends between the parallels 05°S and 30°S and the meridians 30°E and 90°E and more or less corresponds to the centre's area of responsibility as the WMO RSMC La Réunion.

3.3.2 In the capacity of RSMC for the south-western Indian Ocean, TCAC La Réunion is supposed to become the regional focal point for all tropical cyclone-related tasks, particularly tropical cyclone watch and forecasting, and research, development and training. In the operational field, by disseminating technical bulletins concerning tropical cyclone occurrences and forecasts, the centre facilitates activities related to tropical cyclones in the national meteorological services in Africa.

3.3.3 The principal mission of TCAC La Réunion is to provide relevant MWOs, in accordance with the Africa-Indian Ocean (AFI) Regional Air Navigation Plan, with tropical cyclone advisory information to support the issuance of SIGMET information for tropical cyclones by these offices.

3.3.4 TCAC La Réunion is equipped with modern and powerful weather monitoring, data processing and telecommunications systems and instrumentation.

3.3.5 A fully automated telecommunications system in the centre forms a part of the WMO GTS through which it communicates with a number of national meteorological services' communications centres in the region, increasingly using satellite communications and X25 protocol. An X25 at a 64k bits/s channel links the system with Météo-France central computers and databases. Via this channel, the TCAC and RSMC La Réunion are supplied with the Météo-France global model data and European Centre for Medium Range Forecasts (ECMWF) forecasts.

#### ***Tropical cyclone watch***

3.3.6 The lack of aerial reconnaissance and very limited number of conventional observations make satellite imagery the basic tropical cyclone watch tool in the south-western Indian Ocean.

3.3.7 Due to the lack of access to data from a geostationary satellite above the Indian Ocean, the tropical cyclone watch in the area east of the 65°E longitude depends solely on the use of images from nearby polar-orbiting satellites of the U.S. TIROS series. The imagery from the METEOSAT geostationary satellite substantially improves the tropical cyclone watch in all inhabited areas west of the 65°E longitude.



3.3.8 Two “high-end” satellite data receiving stations, a primary data user station to receive the METEOSAT imagery and a high-resolution picture transmission station to receive the TIROS imagery, are available in TCAC La Réunion to acquire the essential information for the tropical cyclone watch. Two automatic picture transmission/weather fax stations can be used for back-up purposes. Apart from the location of tropical cyclone centres and assessment of the direction and speed of their movement, the maximum wind speed in tropical cyclone centres can be derived by analysing satellite data and images. The universally recognized DVORAK technique, based on the analysis of tropical cyclone cloud structure, is used for assessment of the tropical cyclone intensity.

3.3.9 In addition, the centre routinely receives the sea-surface temperature data derived from the European experimental satellite ERS2 (previously ERS1). These data represent another piece of valuable and objective information on tropical cyclone centres and the extent of associated gale and gust areas. Forecasts relating to the tropical cyclones with wind shear, in particular in the initial phase of their development, can also be improved by the use of these data.

3.3.10 Data from a last-generation (10 cm) Doppler weather radar in St-Denis, La Réunion cover an area within a 400-km radius and complement satellite data and imagery.

### ***Tropical cyclone forecasting***

3.3.11 The trajectory and intensity forecasts prepared by TCAC La Réunion are based on:

- a) output from the Météo-France global model and ECMWF numerical weather prediction models. In addition to the direct use of output from these models, a number of derived fields, e.g. the steering flow (flux direct) and wind shear fields, are calculated locally in the centre;
- b) output from the application of a number of operational and experimental tools developed locally, such as climatological and statistico-dynamic trajectory forecast models and the global barotropic and variable grid-sized spectral model, which is initialized by the ECMWF model and boguissing techniques; and
- c) analysis of various other input (satellite images, sea-surface temperature fields, etc.).

### ***Tropical cyclone advisory information***

3.3.12 When a tropical cyclone with a ten-minute mean surface wind speed of 17 m/s (34 kt) or more in its centre is observed in the area of responsibility of TCAC La Réunion, the centre initiates the preparation of tropical cyclone advisory information (tropical cyclone advisory messages) required to be issued every six hours (00, 06, 12 and 18 UTC). The messages are disseminated in accordance with the AFI Regional Air Navigation Plan to the following 15 MWOs:

Antananarivo, Bloemfontein, Bombay, Dar-es-Salaam, Durban, Gaborone, Harare, Johannesburg, Lilongwe, Mahe, Male, Maputo, Mauritius, Nairobi and Perth.

3.3.13 These tropical cyclone advisory messages are transmitted to the MWOs listed above using the AFTN. However, they are also disseminated regionally on the WMO GTS (FKI020 heading).

3.3.14 The tropical cyclone advisory information contains information on the position of the centre of the tropical cyclone, direction and speed of its movement, central pressure, maximum surface wind near the centre, and forecasts of the position of the centre of the cyclone and maximum surface wind for 12 and 24 hours.

***TCAC La Réunion development projects***

3.3.15 The continuous consolidation of the existing operational experience and the application of new scientific developments are intended to be used to further improve the centre and its professional functions. In view of this, research and development activities as well as the training activities of the centre are ongoing.

---

## Appendix 5

# PROCEDURES USED IN THE UNITED STATES TO PROVIDE METEOROLOGICAL SERVICE TO ATS UNITS

### 1. NATIONAL AIRSPACE SYSTEM (NAS)

1.1 To identify and understand the specific aviation meteorological needs of air traffic managers, controllers and specialists, it is necessary to understand the structure and operation of the United States National Airspace System (NAS). Because of the system's complexity, it is not possible to provide an in-depth description of the NAS and its operations in this appendix. However, meteorological information services are critical to the NAS' safety and efficiency. Therefore, it is the purpose of this appendix to describe how air traffic control (ATC) personnel utilize meteorological information provided to them by the national weather service (NWS) in support of ATS in the United States.

1.2. Of utmost importance is that all users of the NAS receive the same hazardous meteorological information simultaneously in order to facilitate coordinated decision-making between air traffic flow managers, controllers, flight service specialists and pilots. Recent organizational changes in the FAA have defined ATS as being en-route oceanic services, terminal services and flight services.

1.3 The primary function of automated flight service stations (AFSS) is to provide pilots with a variety of information and assistance necessary for planning a safe flight within the NAS and along certain overseas and international routes. While primary emphasis is on weather briefings, flight service specialists also originate and disseminate NOTAM pertaining to the status of navigation aids, runway conditions, etc. They brief pilots on current and forecast meteorological conditions along the planned route of flight and at the point of intended landing.

1.4 While there are many requirements for the provision of meteorological information by ATC personnel, such as aerodrome meteorological conditions for instrument approaches, the provision of weather-related services is contingent upon the controller's capability to respond with regard to other duties that may have a higher priority. It is the controller's sole responsibility to determine if he or she is able to provide this service in each particular case. It should be noted, however, that severe weather which would result in a safety hazard is generally handled on a priority basis.

1.5 One of the functions requiring meteorological information is an emergency situation where a pilot who is only qualified for VFR operations encounters IFR conditions. Radar vectors to avoid hazardous weather or to provide guidance to the closest suitable landing area are common procedure.

### 2. NATIONAL WEATHER SERVICE (NWS)

2.1 NWS is responsible for preparing TAF, SIGMET, AIRMET, volcanic ash advisories and tropical cyclone advisories. The issuance of forecasts, hazardous weather statements and advisories follow the prescribed format of ICAO Annex 3. In addition to these international products, the NWS also provides area forecasts, aviation weather watches, aviation weather warnings, and convective SIGMET to meet specific requirements established by the Federal Aviation Administration (FAA) for national practices.

2.2 Specifically, NWS forecast offices (WFO) issue TAF, whereas SIGMET and AIRMET are issued by NWS MWOs. Volcanic ash advisories are issued by VAACs Anchorage and Washington and tropical cyclone advisories are issued by TCAC Miami and Honolulu. All of these weather advisories and forecasts are available to users of the NAS via the national airspace data interchange network (NADIN).

2.3 Fulfilling the role of one of the two WAFCs, the National Centre for Environmental Prediction provides meteorological data and products to support flight planning for global aeronautical operations. These products are made available on the WAFS Internet File Service (WIFS). Products provided by the WAFCs are in compliance with Annex 3, Appendix 2.

2.4 In-flight advisories are issued for potentially hazardous meteorological conditions that may not have been forecast. They are also issued to update en-route forecasts for aircraft that may not have had a pre-flight briefing. SIGMET are issued for the severest meteorological conditions that affect all types of aircraft and follow the SARPs of Annex 3. AIRMET are directed to light aircraft that are less equipped and less able to cope with less severe weather that is of little or no concern to large heavy aircraft.

### **3. DISSEMINATION OF AVIATION METEOROLOGICAL DATA**

3.1 The principal method for disseminating aviation meteorological information and products is the FAA weather message switching centre replacement (WMSCR). The WMSCR serves as a repository of the most current aviation weather products in an alphanumeric text format. The WMSCR interfaces direct with the NWS telecommunication gateway allowing users of the NAS to access the most recent and current meteorological information from the NWS. Information is routed automatically to all users over dedicated circuits on a routine scheduled basis and also on an unscheduled basis as a function of the urgency of the message. If need be, users can access aviation meteorological information on a request reply basis. In short, as soon as a meteorological message is received in the WMSCR, it is routed automatically to those users who have requested the information. The system operates on a store and forward basis.

3.2 There are two WMSCR systems that serve all users of the NAS. For efficiency of operation, each system serves half the country; however, if there were a failure in one of the systems, the other system has the capability to serve all the users of the NAS.

3.3 WMSCR creates a database of all the METAR, TAF, SIGMET, AIRMET, volcanic ash advisories and tropical cyclone advisories for distribution to all ATC facilities and airline operations centres. Not only is it a domestic products database, but international products as well are available to users of the NAS via this network.

3.4 Depending upon the type of message and its level of priority, information is routinely forwarded to the appropriate facility for utilization in decision-making for controlling airspace and flight planning.

3.5 In addition to WMSCR, as mentioned above, the FAA makes aviation meteorological products available on the WIFS in accordance with regional air navigation plans. The alphanumeric text products that are available from WMSCR are also made available on the WIFS. The WIFS also has the capability to make available graphical products in addition to the alphanumeric products, such as graphical depiction of volcanic ash clouds and high-level SIGWX charts.

### **4. AIR TRAFFIC SERVICES (ATS)**

ATS is a complex organization that involves thousands of individuals who are responsible for managing the NAS. This includes regulating the flow and movement of aircraft throughout the NAS, training controllers and specialists, providing

meteorological briefings, managing traffic flow, controlling terminal airspace, etc. Services that pertain to coordination efforts between ATS and MET can be described as those services provided at: the ATC system command centre (ATCSCC), air route traffic control centres (ARTCCs), air traffic control towers (ATCTs), terminal radar approach controls (TRACONs), automated flight service stations (AFSS), centre weather service units (CWSUs) that are housed in the ARTCC, and at the MWOs in Anchorage, Kansas City and Honolulu. The following sections describe in detail the aviation weather services provided to users of the NAS.

## **5. AIR ROUTE TRAFFIC CONTROL CENTRES (ARTCCs)**

5.1 The primary function of the ARTCCs is to control and separate air traffic within designated airspace along defined airways and over certain designated oceanic routes. This ATC service is provided to aircraft operating on IFR flight plans principally during the en-route phase of flight. Additionally, ARTCCs provide services for IFR aircraft operating to and from non-approach control airports.

5.2 When equipment capabilities and controller workload permit, certain advisory services, such as meteorological and airport conditions and radar vectoring service, may be provided to VFR aircraft.

5.3 The airspace under the jurisdiction of an ARTCC covers thousands of square miles that can cross over several states and altitudes up to 60 000 ft. To accommodate this vast amount of airspace, ARTCCs customarily divide their airspace into three to five areas of specialization, and each area is then subdivided into as many as ten sectors. Also, the airspace is stratified into low, high and super-high altitude sectors.

5.4 En-route controllers become familiar with pertinent meteorological information and maintain an awareness of current meteorological information needed to perform ATC duties. En-route controllers advise pilots of hazardous weather and other phenomena in the atmosphere that may impact operations within 150 NM of the controller's assigned sector or area of jurisdiction.

5.5 Collocated in each ARTCC is a CWSU. The principal function of the CWSU is to advise the air traffic management unit in the ARTCC of hazardous weather within its airspace.

## **6. CENTRE WEATHER SERVICE UNITS (CWSUs)**

6.1 The CWSU functions within the ARTCC. The purpose of the CWSU is to gather meteorological data, assimilate and analyse it and filter out the pertinent data. The meteorological information disseminated from the CWSU is data pertinent to ATC operations and air safety.

6.2 CWSU meteorologists brief the ARTCC supervisors on present and forecast weather. They also provide support to supervisory and operational personnel at major hub airport towers, approach controls, en-route flight advisory service (EFAS) and other FAA facilities on meteorological conditions impacting or expected to impact the ARTCC area.

6.3 Meteorological briefings, both scheduled and on-demand, are given by the meteorologist at all centres. They may be of a general overview content for planning purposes or may be of a tactical nature depending on the immediacy of the meteorological impact.

6.4 CWSU meteorologists generate weather advisories known as centre weather advisories (CWAs) valid for up to two hours. These advisories are directed at the most significant or potentially hazardous type weather that may impact air traffic and are distributed within the ARTCC to those controllers and managers who need to be made aware of existing meteorological conditions and changes.

6.5 CWSUs at the centres currently have access to the following data and/or products to aid them in their mission to support ATC personnel:

- a) radar summary chart;
- b) observed winds aloft chart;
- c) upper wind forecasts;
- d) surface weather depiction analysis;
- e) surface pressure and frontal analysis and forecasts;
- f) low-level significant weather forecasts;
- g) significant weather outlook;
- h) upper air standard pressure level analysis and forecasts;
- i) tropopause/vertical wind shear forecasts;
- j) thunderstorm/severe weather probabilities; and
- k) probability of precipitation/conditional probability of frozen precipitation.

6.6 CWSUs have drop-on special NWS circuits that are dedicated to the collection and dissemination of observations, forecasts and warnings of severe weather in connection with thunderstorms, hurricanes and heavy snow forecasts.

## **7. TERMINAL RADAR APPROACH CONTROLS (TRACONS)**

7.1 TRACONS utilize radar and air-to-ground communications to provide specific ATC services to aircraft arriving at, departing from or transiting airspace controlled by the facility.

7.2 Because the TRACON may include several major ATCTs and non-tower (satellite) facilities, meteorological data, when available, are utilized in operational decision-making by controllers. The TRACON also has a need for additional meteorological data such as those obtained from radar systems and pilot reports. The primary source of real-time hazardous meteorological information is pilot weather reports (PIREPs)<sup>1</sup>, which usually inform users of the NAS about the occurrence of turbulence, icing, volcanic ash, etc.

7.3 Although ATC radar units are not optimized for meteorological detection, there is a capability to obtain some useful information regarding convective cells. ATC radar is designed for surveillance purposes; however, research has shown that some useful meteorological information can be obtained from these systems.

7.4 Other sources of meteorological data that are of use to controllers in the TRACONS include RVR, low-level wind shear (LLWS) and digital altimeter setting indicator.

---

1. Referred to in ICAO documentation as AIREPs.

7.5 Controllers in the TRACONs usually receive daily telephone briefings from the CWSU meteorologist. As required, the CWSU meteorologist also provides information concerning hazardous weather in the area.

7.6 PIREPs and other information, such as SIGMET, CWAs, radar interpretations, surface observations and other data obtained from various readout devices, are available to controllers in the TRACON for dissemination to pilots via air-to-ground radio.

7.7 Future architectural design of the NAS envisions the ability to provide these products and others direct to the pilot via data link, without human intervention. In a similar manner, automation will allow PIREPs to be downlinked to earth-receiving stations so current wind, temperature, humidity and turbulence information can be ingested into the NAS for processing by numerical models for enhanced forecasts. The FAA flight information services policy ensures that pilots have access to basic meteorological data to operate safely and efficiently. Commercial services are encouraged to provide value-added information to the pilot for better and more informed decision-making.

## **8. AIR TRAFFIC CONTROL TOWERS (ATCTs)**

8.1 An ATCT is a terminal facility that uses air-to-ground communications, visual signalling and other devices to provide ATC services to aircraft operating in the vicinity of an airport or in the movement area. Controllers working in the ATCT authorize aircraft to land or take off at the airport. In some circumstances, a tower may have the responsibility to provide approach control services. ATCTs provide ATC services to all aircraft operating on the surface movement area or to all aircraft that are airborne and operating in the control zone of the airport.

8.2 Terminal controllers become familiar with pertinent meteorological information and maintain an awareness of current meteorological information needed to perform their duties. Terminal controllers advise pilots of hazardous weather that may impact operations within 150 NM of the controllers' assigned sectors or areas of jurisdiction. Tower controllers may opt to broadcast hazardous meteorological information alerts for airspace under the ATCT's jurisdiction.

8.3 At many airports, ATIS provides continuous broadcast of recorded information. Its purpose is to improve controller effectiveness and to relieve frequency congestion by automating the repetitive transmission of non-control airport/terminal area and meteorological information. In the future, these systems will be replaced with more advanced equipment that can take advantage of digitized information. Eventually, all this information will be provided by data link, a more advanced type of communication.

8.4 The aviation meteorological data requirements are generally restricted to the confined area under the jurisdiction of the airport traffic control tower. Typically, the tower requires meteorological information in an area of about 15 NM around the airport with emphasis on meteorological conditions existing in the operating corridors and over the runway complex. Airport meteorological data are obtained from a suite of meteorological sensors located on the airport in an area considered representative of the runway landing zone. Through automation, real-time one-minute observations are provided to the tower controller for operational use. At the same time, hourly METAR messages are issued for transmission beyond the aerodrome for flight planning purposes. SPECI messages are issued according to prescribed procedures that signify a significant change in meteorological conditions for operational purposes.

8.5 Because of the vast number of airports within the United States, not all airports can receive the same level of meteorological service. To provide meteorological service at as many airports as possible in the NAS, the FAA is using automated surface observing systems (ASOS) to provide service where hitherto there was limited or no meteorological service. Automated stations cannot provide a complete METAR message; however, it has been determined that the basic meteorological elements can be provided to ensure safe operations at the airport. At key selected airports, such as international airports, the FAA has contract observers to augment the automated meteorological reports to ensure that the METAR and SPECI messages meet the SARPs of Annex 3. Automated stations provide basic meteorological information to allow for safe operations at those airports. All METAR and SPECI

are made available to both ATCT and TRACON facilities as required.

8.6 A centre-field wind speed and direction sensor provides wind speed direction and gust information. A barometric pressure sensor provides the certified altimeter setting pressure for the airport. A transmissometer or a forward-scatter meter provides the RVR. On instrumented runways, RVR is measured at three points (touchdown, midpoint and roll-out). The FAA has installed LLWS at well over a hundred airports for the purpose of advising ATC and pilots of wind shear conditions at the airport. At key airports, terminal Doppler weather radar (TDWR) has been installed. This radar system detects wind shear, including microburst phenomena, within the airspace of the aerodrome. The TDWR is programmed to advise ATC of microbursts that are about to affect the runway or are within the approach or departure paths. Upon notification of a microburst, tower controllers immediately alert pilots of the hazard.

8.7 In addition to TDWR, an integrated terminal weather information system (ITWS) is being installed at selected ATCTs. This system has the ability to display the most current meteorological information within the aerodrome and to provide guidance to controllers on changing meteorological conditions. ITWS provides information on significant weather associated with severe storms and facilitates routing of aircraft around hazardous weather by processing information from LLWs, TDWR and airport surveillance radar and NWS next-generation weather radar (NEXRAD). Also available to ITWS is lightning data.

8.8 PIREPs requested from or reported by pilots provide the controllers with detailed information on meteorological conditions that exist and have possibly not been observed by meteorological instruments. These PIREPS are passed along to other aircraft en route and are entered into the NADIN for dissemination to all users of the NAS.

8.9 The tower controllers provide METAR/SPECI messages for the airport to the pilots via a recorded message on the ATIS. At airports where there is an automated interface with the ATIS, the ASOS provides a direct report for broadcast. Tower controllers also have the option to report unusual conditions, such as wind shear and runway braking conditions, on the ATIS messages.

## **9. AUTOMATED FLIGHT SERVICE STATIONS (AFSS)**

9.1 Within the United States, the FAA has established AFSS to support the aviation community.

9.2 AFSS have the prime responsibility for pre-flight pilot briefings, en-route communications with VFR flights, assisting lost VFR aircraft, originating NOTAM, broadcasting aviation meteorological information, accepting and closing flight plans, monitoring radio NAVAIDs and assisting search and rescue units in locating missing VFR aircraft. The largest single user of these services is the general aviation pilot.

9.3 AFSS specialists brief pilots on current or forecast aviation meteorological conditions along their intended route of flight and at the point of intended landing. A pre-flight briefing includes the location of potentially hazardous conditions and alternate routes or a recommendation, when appropriate, that a flight not be conducted. Current and forecast meteorological data and PIREPs are also available to aircraft in flight.

9.4 Within the AFSS, there exists an en-route flight advisory service (EFAS) to aircraft operating in their assigned areas. EFAS collects/disseminates PIREPs and other real-time meteorological information to en-route aircraft. EFAS also has the meteorological expertise support of the CWSU meteorologist if required.

9.5 PIREPs are received via direct radio contact with pilots from centres and, less frequently, from towers. They are considered a major source of real-time weather and of utmost importance to stations providing en-route flight advisory service. The AFSS or EFAS specialist eliminates duplicated information and enters the most recent reports into NADIN for further dissemination to all users of the NAS.



## 10. EN-ROUTE FLIGHT ADVISORY SERVICE (EFAS)

10.1 The primary objective of EFAS (also known as flight watch) is to enhance aviation safety by providing en-route aircraft with timely and relevant weather advisories. This objective is met by providing complete and accurate information on weather as it exists along a route pertinent to a specific flight. The aim is not only to provide information in a timely manner so that unnecessary changes to a flight plan are not required, but also to provide the pilot with the opportunity to make a decision to terminate the flight or alter course before adverse conditions are encountered.

10.2 Flight watch serves as a common collector for receiving and disseminating in-flight meteorological reports. Flight watch specialists are cognizant of the latest available meteorological information covering their area. Specialists watch for and review subsequent forecasts, charts and observations, including radar and pilot reports, in order to keep abreast of meteorological trends and developments.


10.3 Regardless of meteorological conditions, flight watch specialists continually solicit pilot reports regarding upper winds and temperature, wind shear turbulence and icing. Such reports are disseminated to those needing them, both within the facility and to external offices.

10.4 EFAS specialists interpret and summarize weather radar video displays and issue pertinent information on observed/reported meteorological conditions.


## 11. FUTURE DEVELOPMENTS IN METEOROLOGICAL PROGRAMMES

11.1 With the advent of Doppler radar and the implementation and operation of NEXRAD, great strides have been made in the development of algorithms that allow for the detection of significant weather, especially convective meteorological activity. The NEXRAD data that are available to the WFO are also made available to the CWSU meteorologist and to the controller displays. The aim is to provide the most current meteorological information to controllers so they can advise pilots on hazardous weather situations within their controlled airspace. How the information is to be displayed both to meteorologists and controllers involves human factors considerations that are still being developed as new information is ingested into the system for further analysis and evaluation. The overall goal is to develop a capability to detect, measure and track severe weather so that controllers will have the ability to re-route aircraft in a timely manner to avoid hazardous weather and to establish an orderly flow of traffic to and from high-density airports.

11.2 Figures A5-1 and A5-2 illustrate some of the research and development activities being pursued in the United States to achieve this goal. In parallel, separate projects are also being undertaken to further develop the turbulence and icing forecasts. Two products in these fields are shown in Figures A5-3 and A5-4.

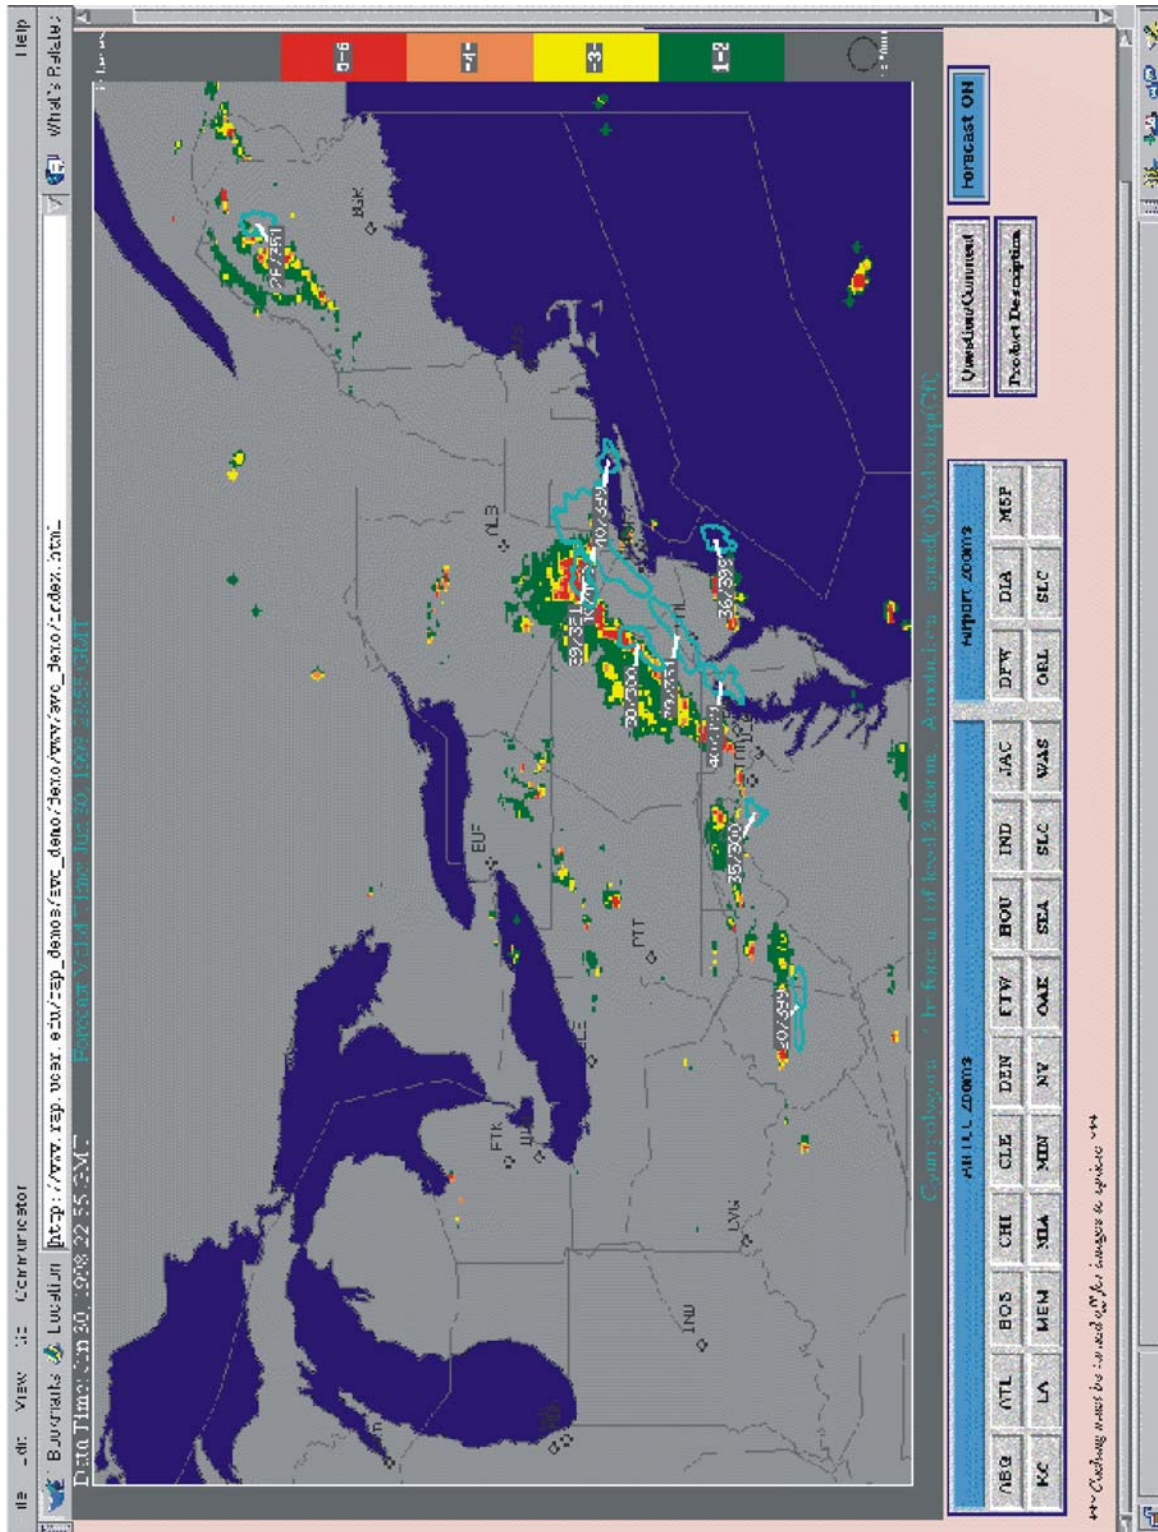


**Figure A5-1. Regional convective weather forecast**  
 (Experimental product being developed at Lincoln Laboratory,  
 Massachusetts Institute of Technology, Lexington, Massachusetts)

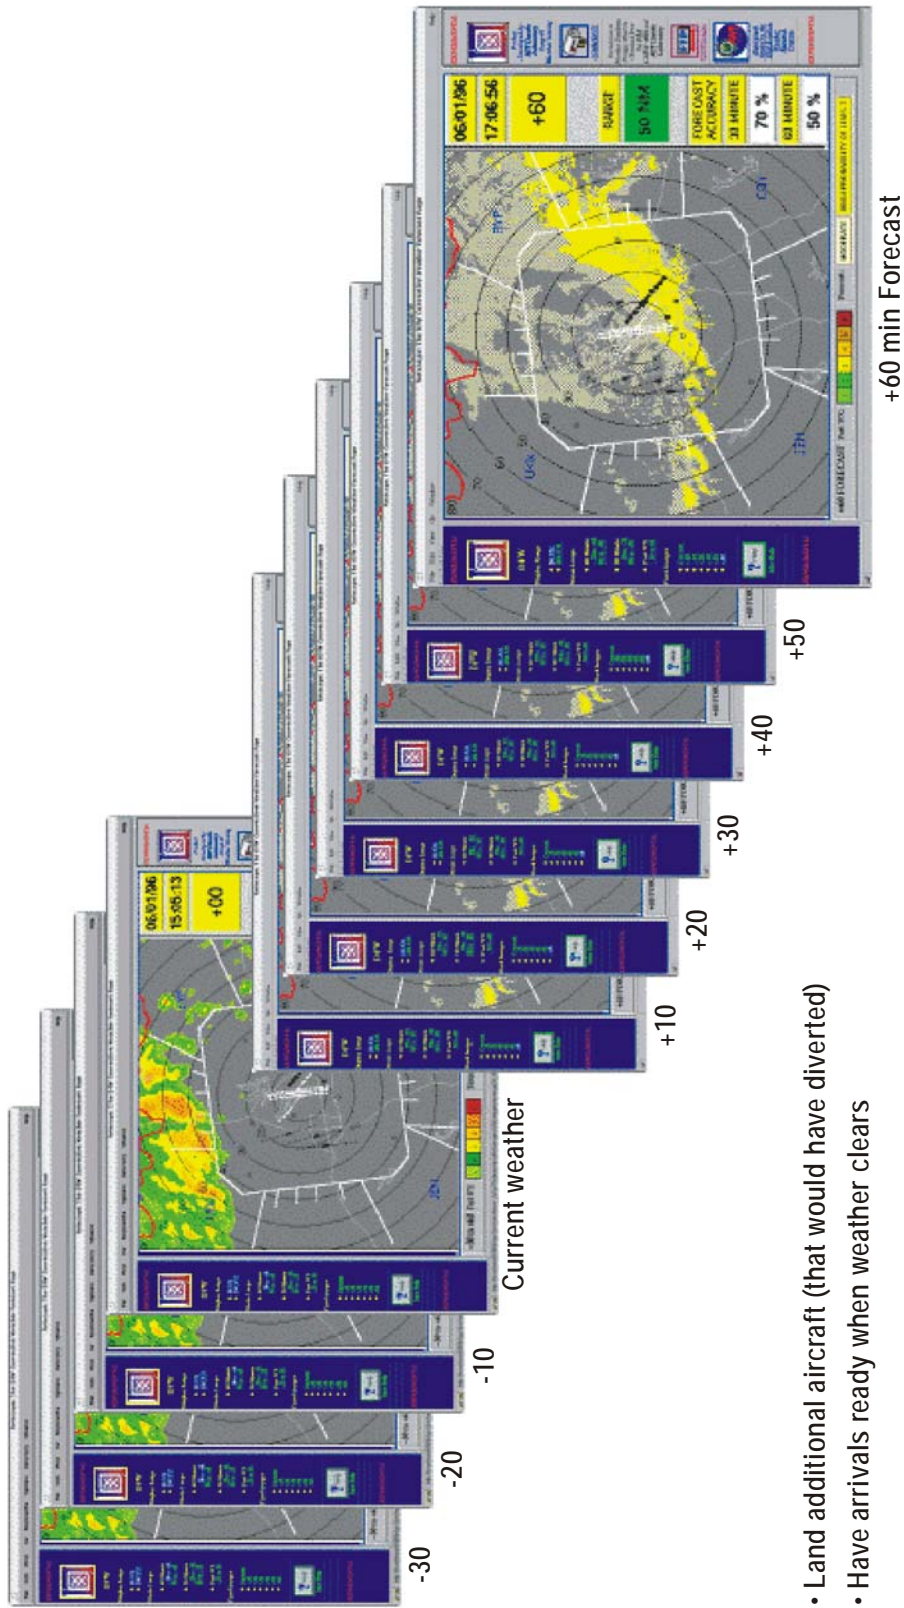

- Land additional aircraft (that would have diverted)
- Have arrivals ready when weather clears

*Note.— The processed weather radar data are supplemented by information on precipitation, temperature and dew-point temperature observed and forecast for a period of 4 up to 12 hours.*


**Figure A5-2. Terminal convective weather forecast product**  
 (Experimental product being developed at the  
 National Center for Atmospheric Research, Boulder, Colorado)

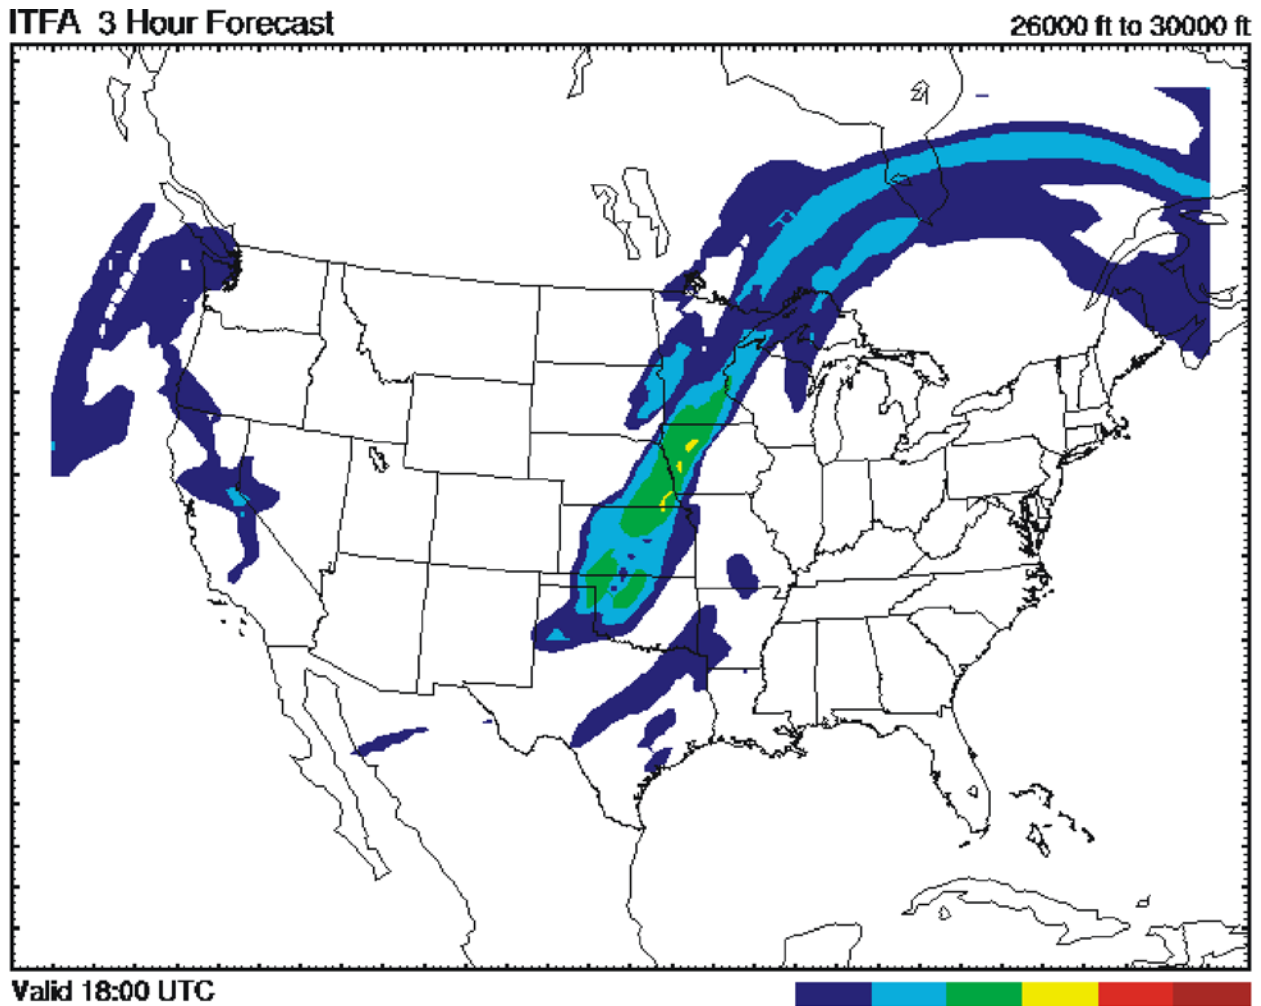

*Note.— The algorithm integrates turbulence data from automated aircraft observations, expressed in terms of the eddy dissipation rate and relevant remote sensing and diagnostic data.*

**Figure A5-3. Turbulence forecast — integrated turbulence forecast algorithm**  
(Experimental product being developed at the  
National Center for Atmospheric Research, Boulder, Colorado and the  
National Oceanic and Atmospheric Administration, Forecast Systems Laboratory)



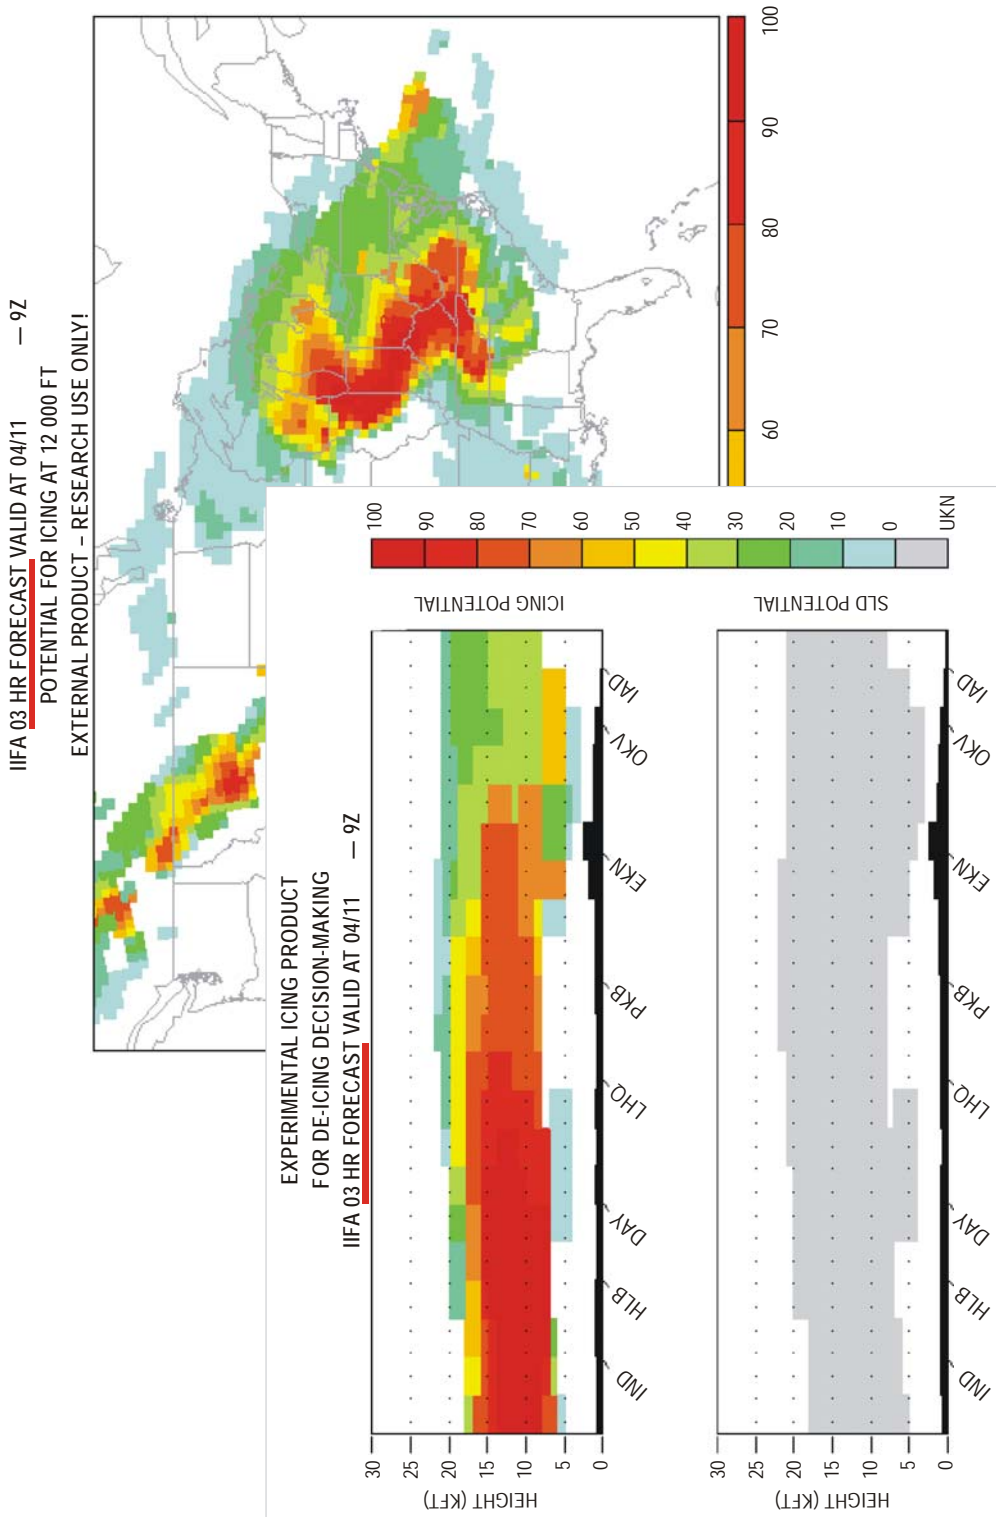

**Figure A5-4. Two examples of experimental integrated icing forecast algorithm (IIFA) products**  
 (Experimental products being developed at the National Center for Atmospheric Research, Boulder, Colorado)

— END —





ISBN 978-92-9249-698-2



9

783292

496982